


4

3

2


1

REVISIONS						
ZONE	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD APPD
	X	EXP. RELEASE	8-31-67		H.G.	
	8	ORIG. RELEASE FOR PRODUCTION	11-27-67		R.G.	

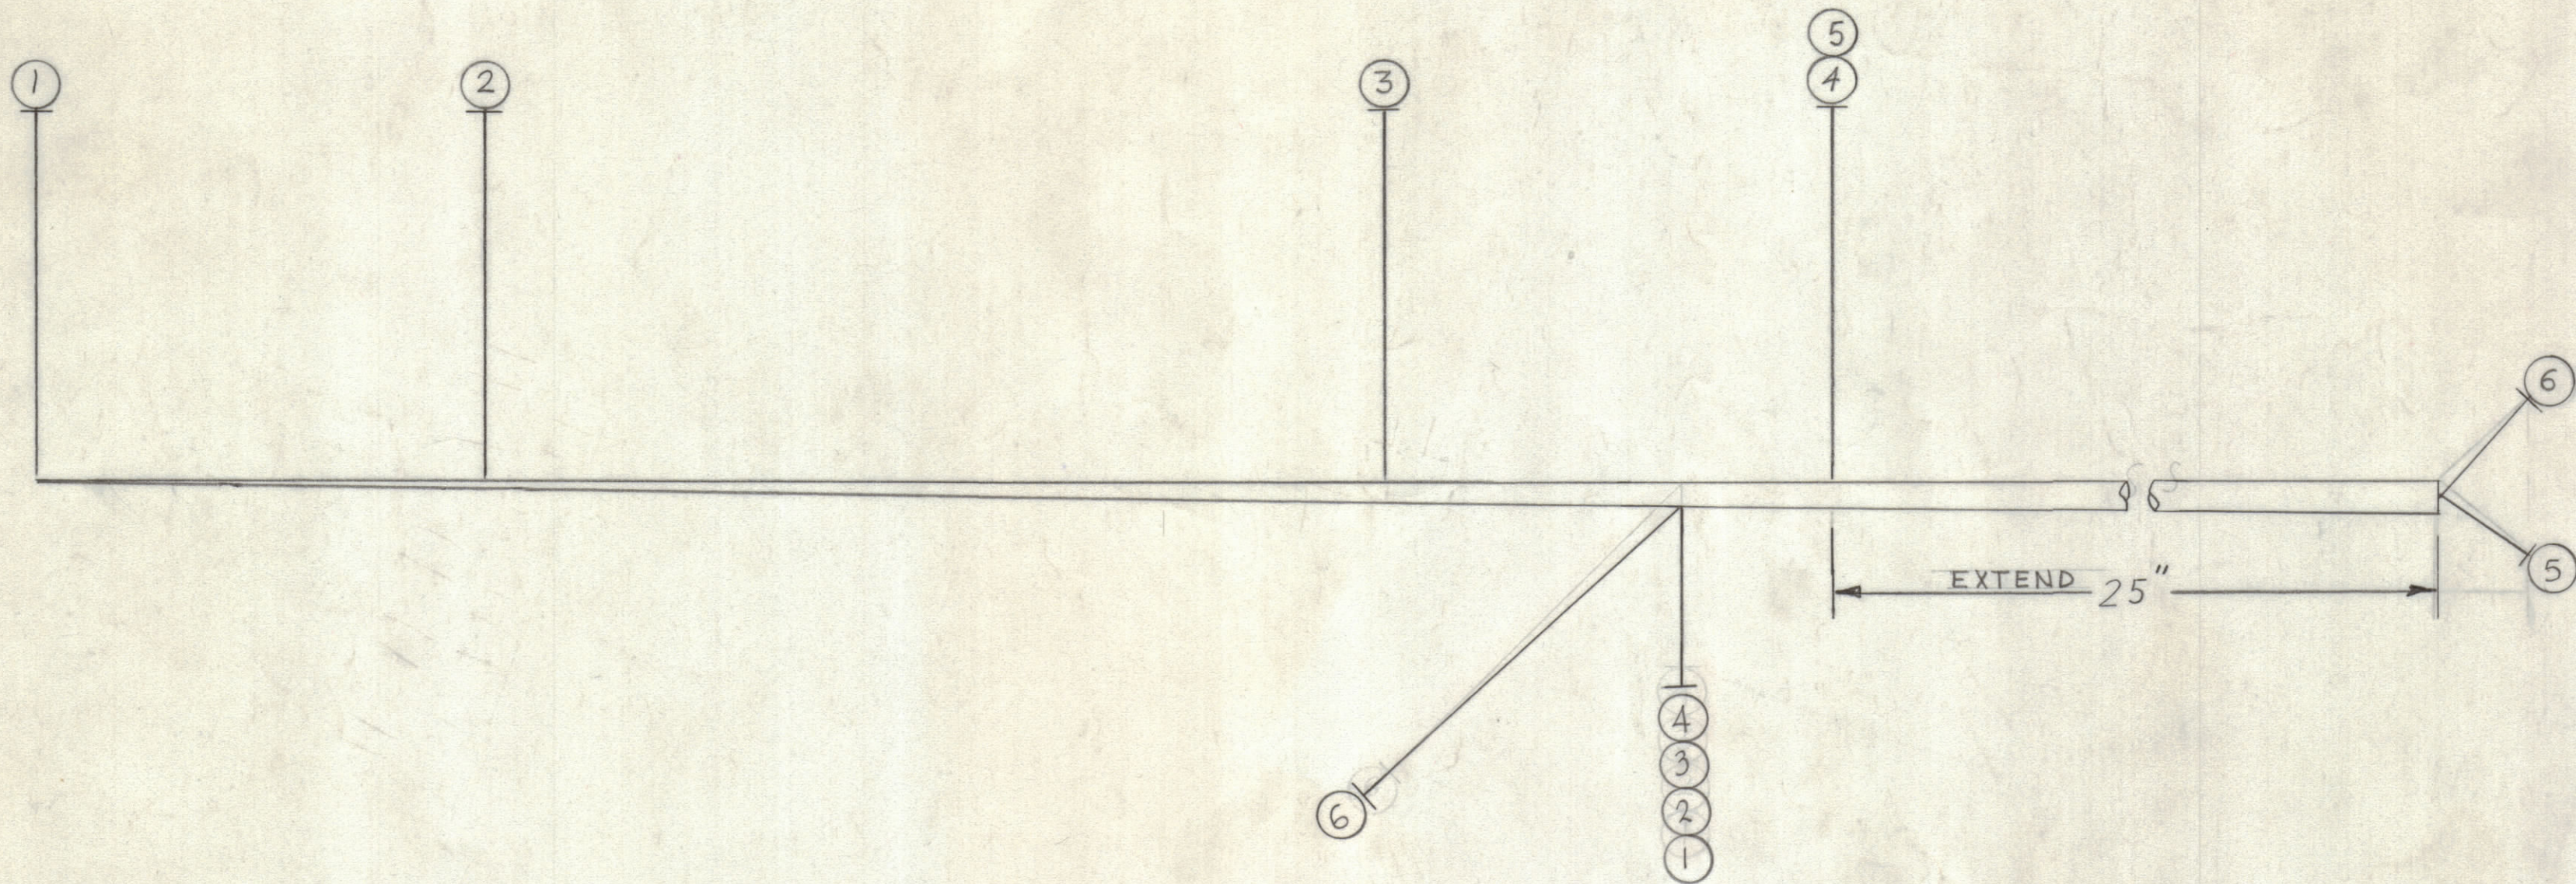

CA1353


X	8	BS100	SOLDER, TIN ALLOY
X	7	CD-101-1MW	CORD, NYLON, LACING
	6	MWC22(7)U-2	WIRE ELEC, INS.
	5		97
	4		7
	3		7
	2		7
	1	MWC22(7)U-7	WIRE ELEC. INS.



THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

UNLESS OTHERWISE SPECIFIED WIRES SHOULD BE PLACED IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

1. ALL R.F. CABLES
 2. ALL SHIELDED CABLES
 3. ALL OTHERS
- SPACE LACING APPROXIMATELY 3/4" APART.



1	RAK-75-4	
QTY / UNIT	MODEL USED ON	ASS'Y NO.
APPLICATION		
	CODE A	S401-451

NOTICE TO PERSONS RECEIVING THIS DRAWING
 THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES ON

DECIMALS	FRACTIONS
.X ± .05	± 1/64
.XX ± .01	ANGLES
.XXX ± .005	± 0° -30'

FINAL APPROVAL	DATE
<i>[Signature]</i>	11/29/67
MECH. DES.	DATE
ELECT. DES.	DATE
<i>[Signature]</i>	11-21-67
CHECKED	DATE
<i>[Signature]</i>	11-22-67
DRAWN	DATE
H.G.	8/31/67

THE TECHNICAL MATERIEL CORP.
 MAMARONECK, NEW YORK

WIRING HARNESS, BRANCHED

SIZE	CODE IDENT.NO.	DWG NO.	ISSUE
C	82679	CA1353	8
SCALE	1:1	SHEET	OF
		11/27/67	

4

3

2

1