



REVISIONS							
ZONE	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD	APPD
X		EXP. RELEASE	8-15-67				
X1		ON ITEM 29 XAG-13 WAS XAG-12	10-30-67		RG		
X2		XAS WAS XAC, AG WAS AT, IT. 21 SIS WAS SIG	6-26-67		PC		
Ø		ORIG. RELEASE	12-4-68			SG	

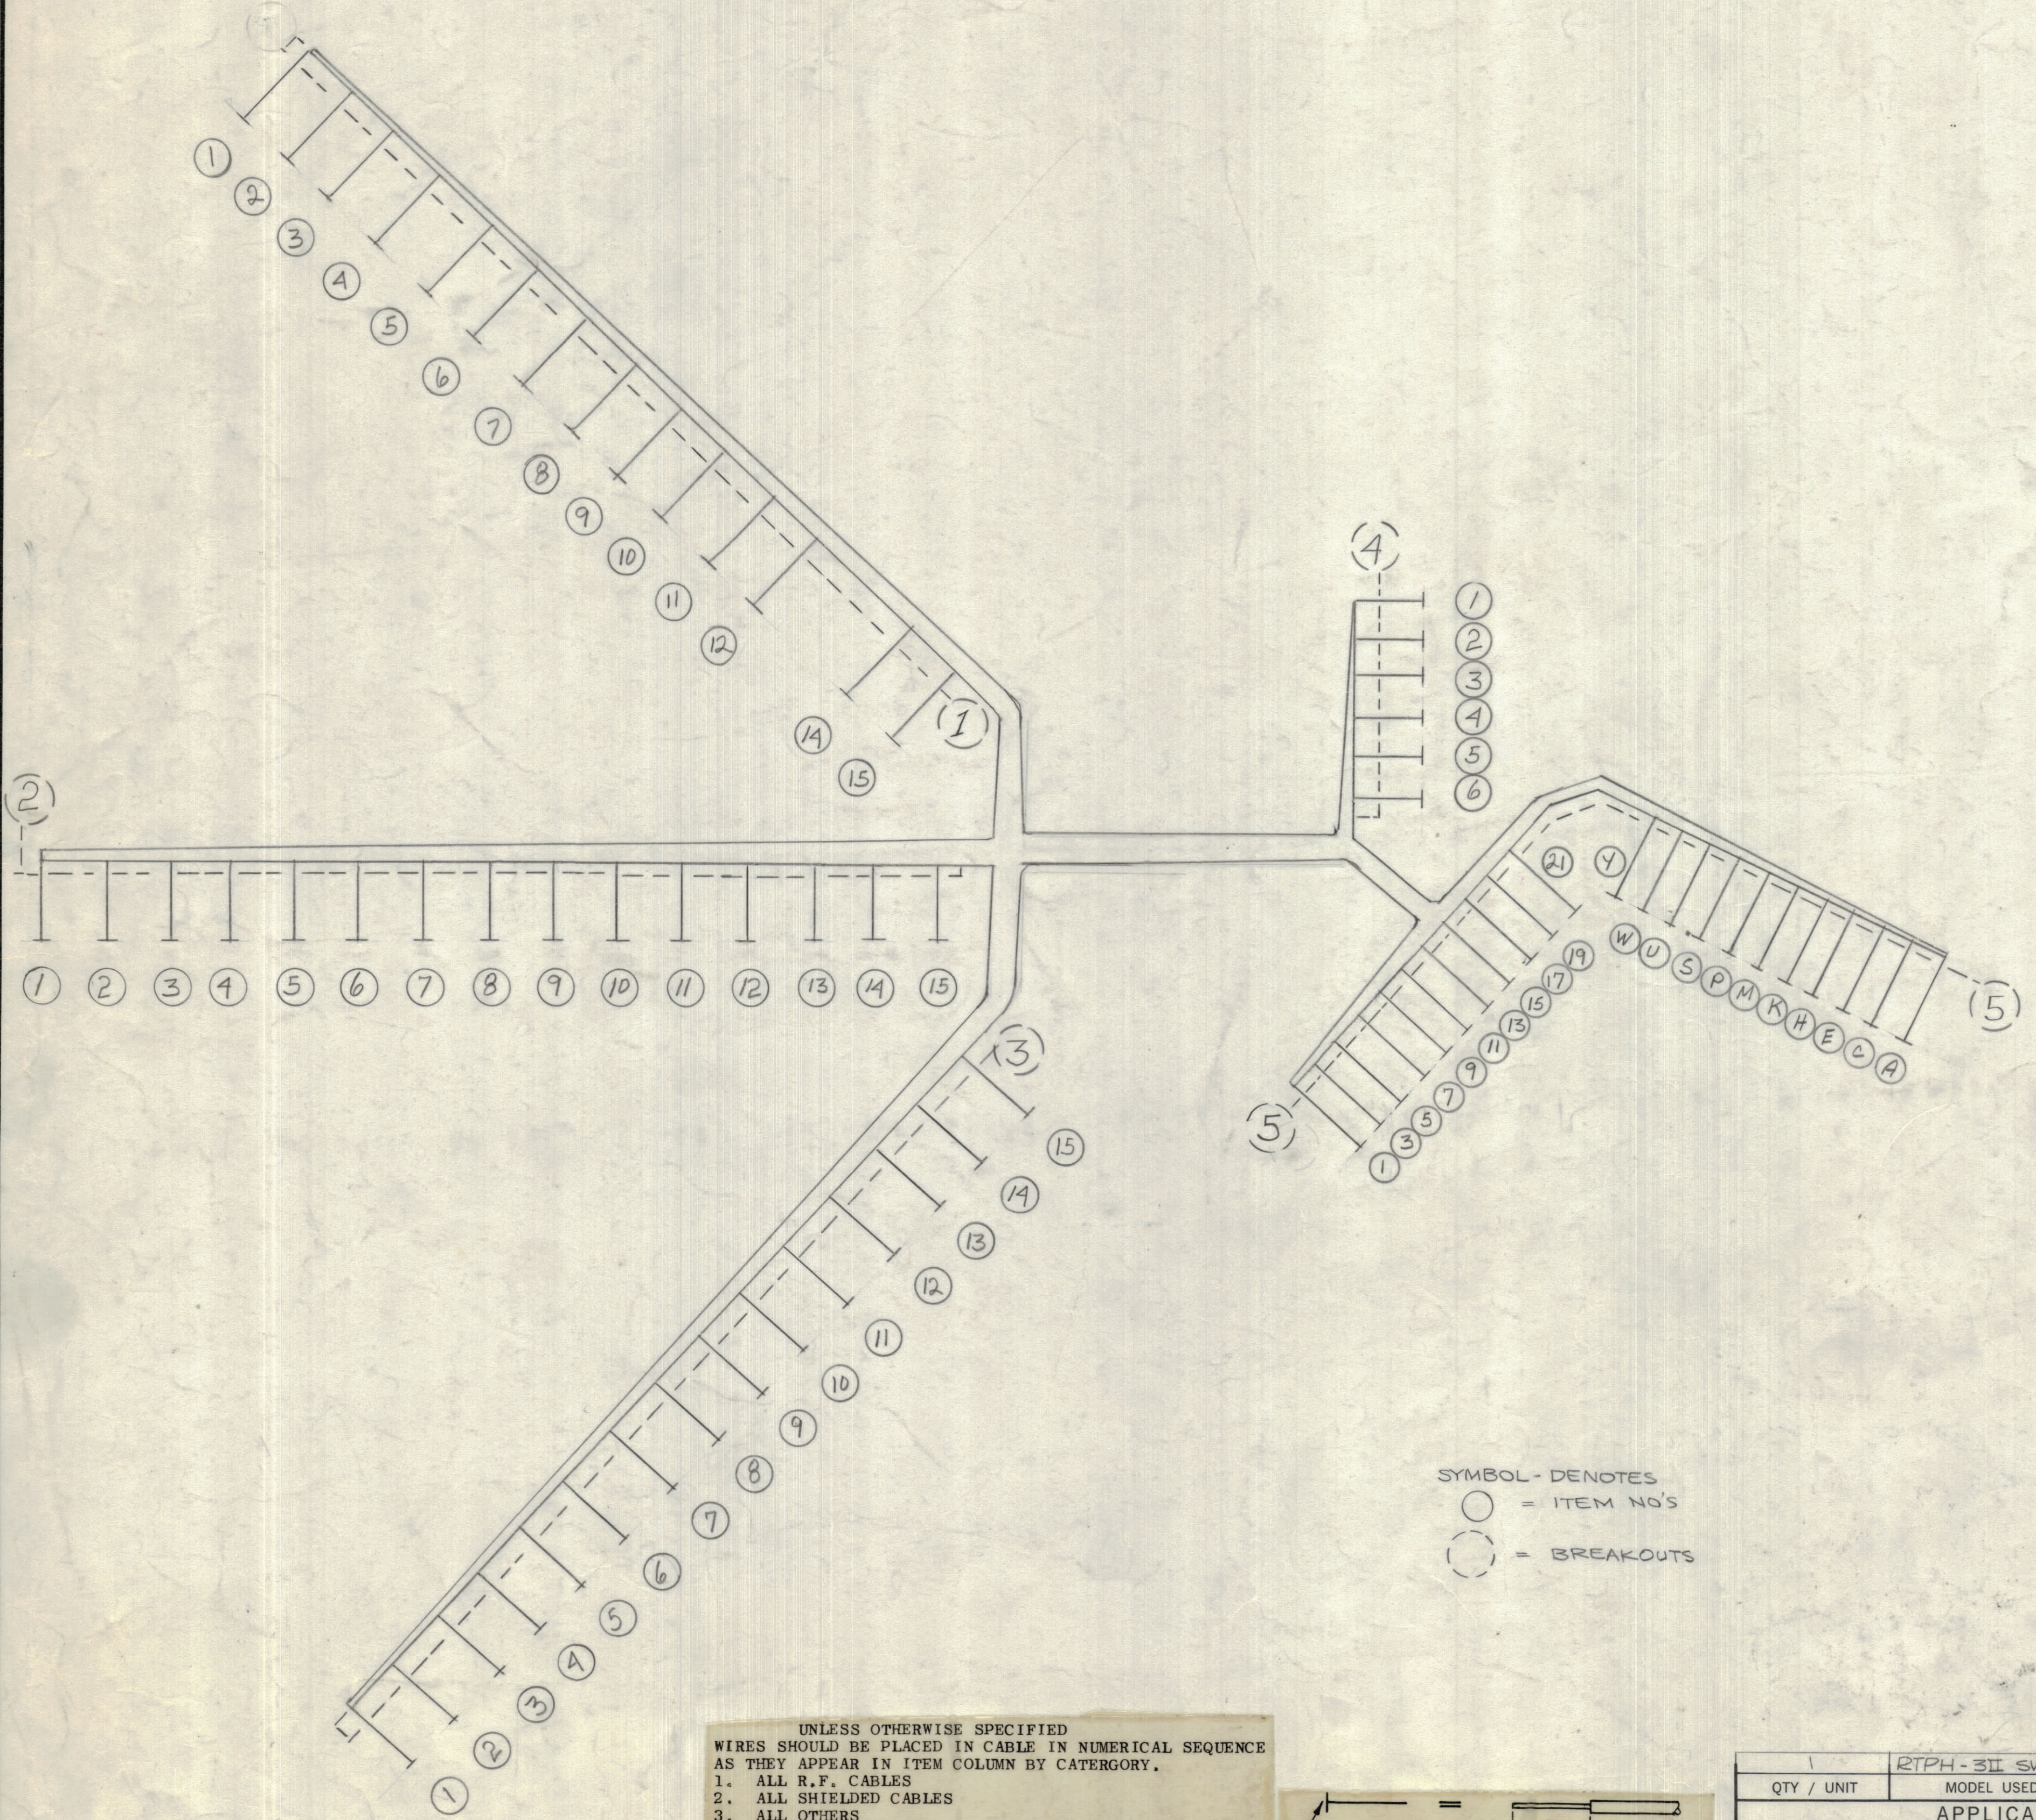

SYMBOL - DENOTES
 ○ = ITEM NO'S
 ○ (dashed) = BREAKOUTS

UNLESS OTHERWISE SPECIFIED
 WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE
 AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.
 1. ALL R.F. CABLES
 2. ALL SHIELDED CABLES
 3. ALL OTHERS
 SPACE LACING APPROXIMATELY 3/4" APART.

THIS SYMBOL DENOTES END OF INSULATION
 AND NAIL DRIVING POINT. WIRE MUST BE
 STRIPPED 3/4" BEYOND THIS POINT AND
 TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

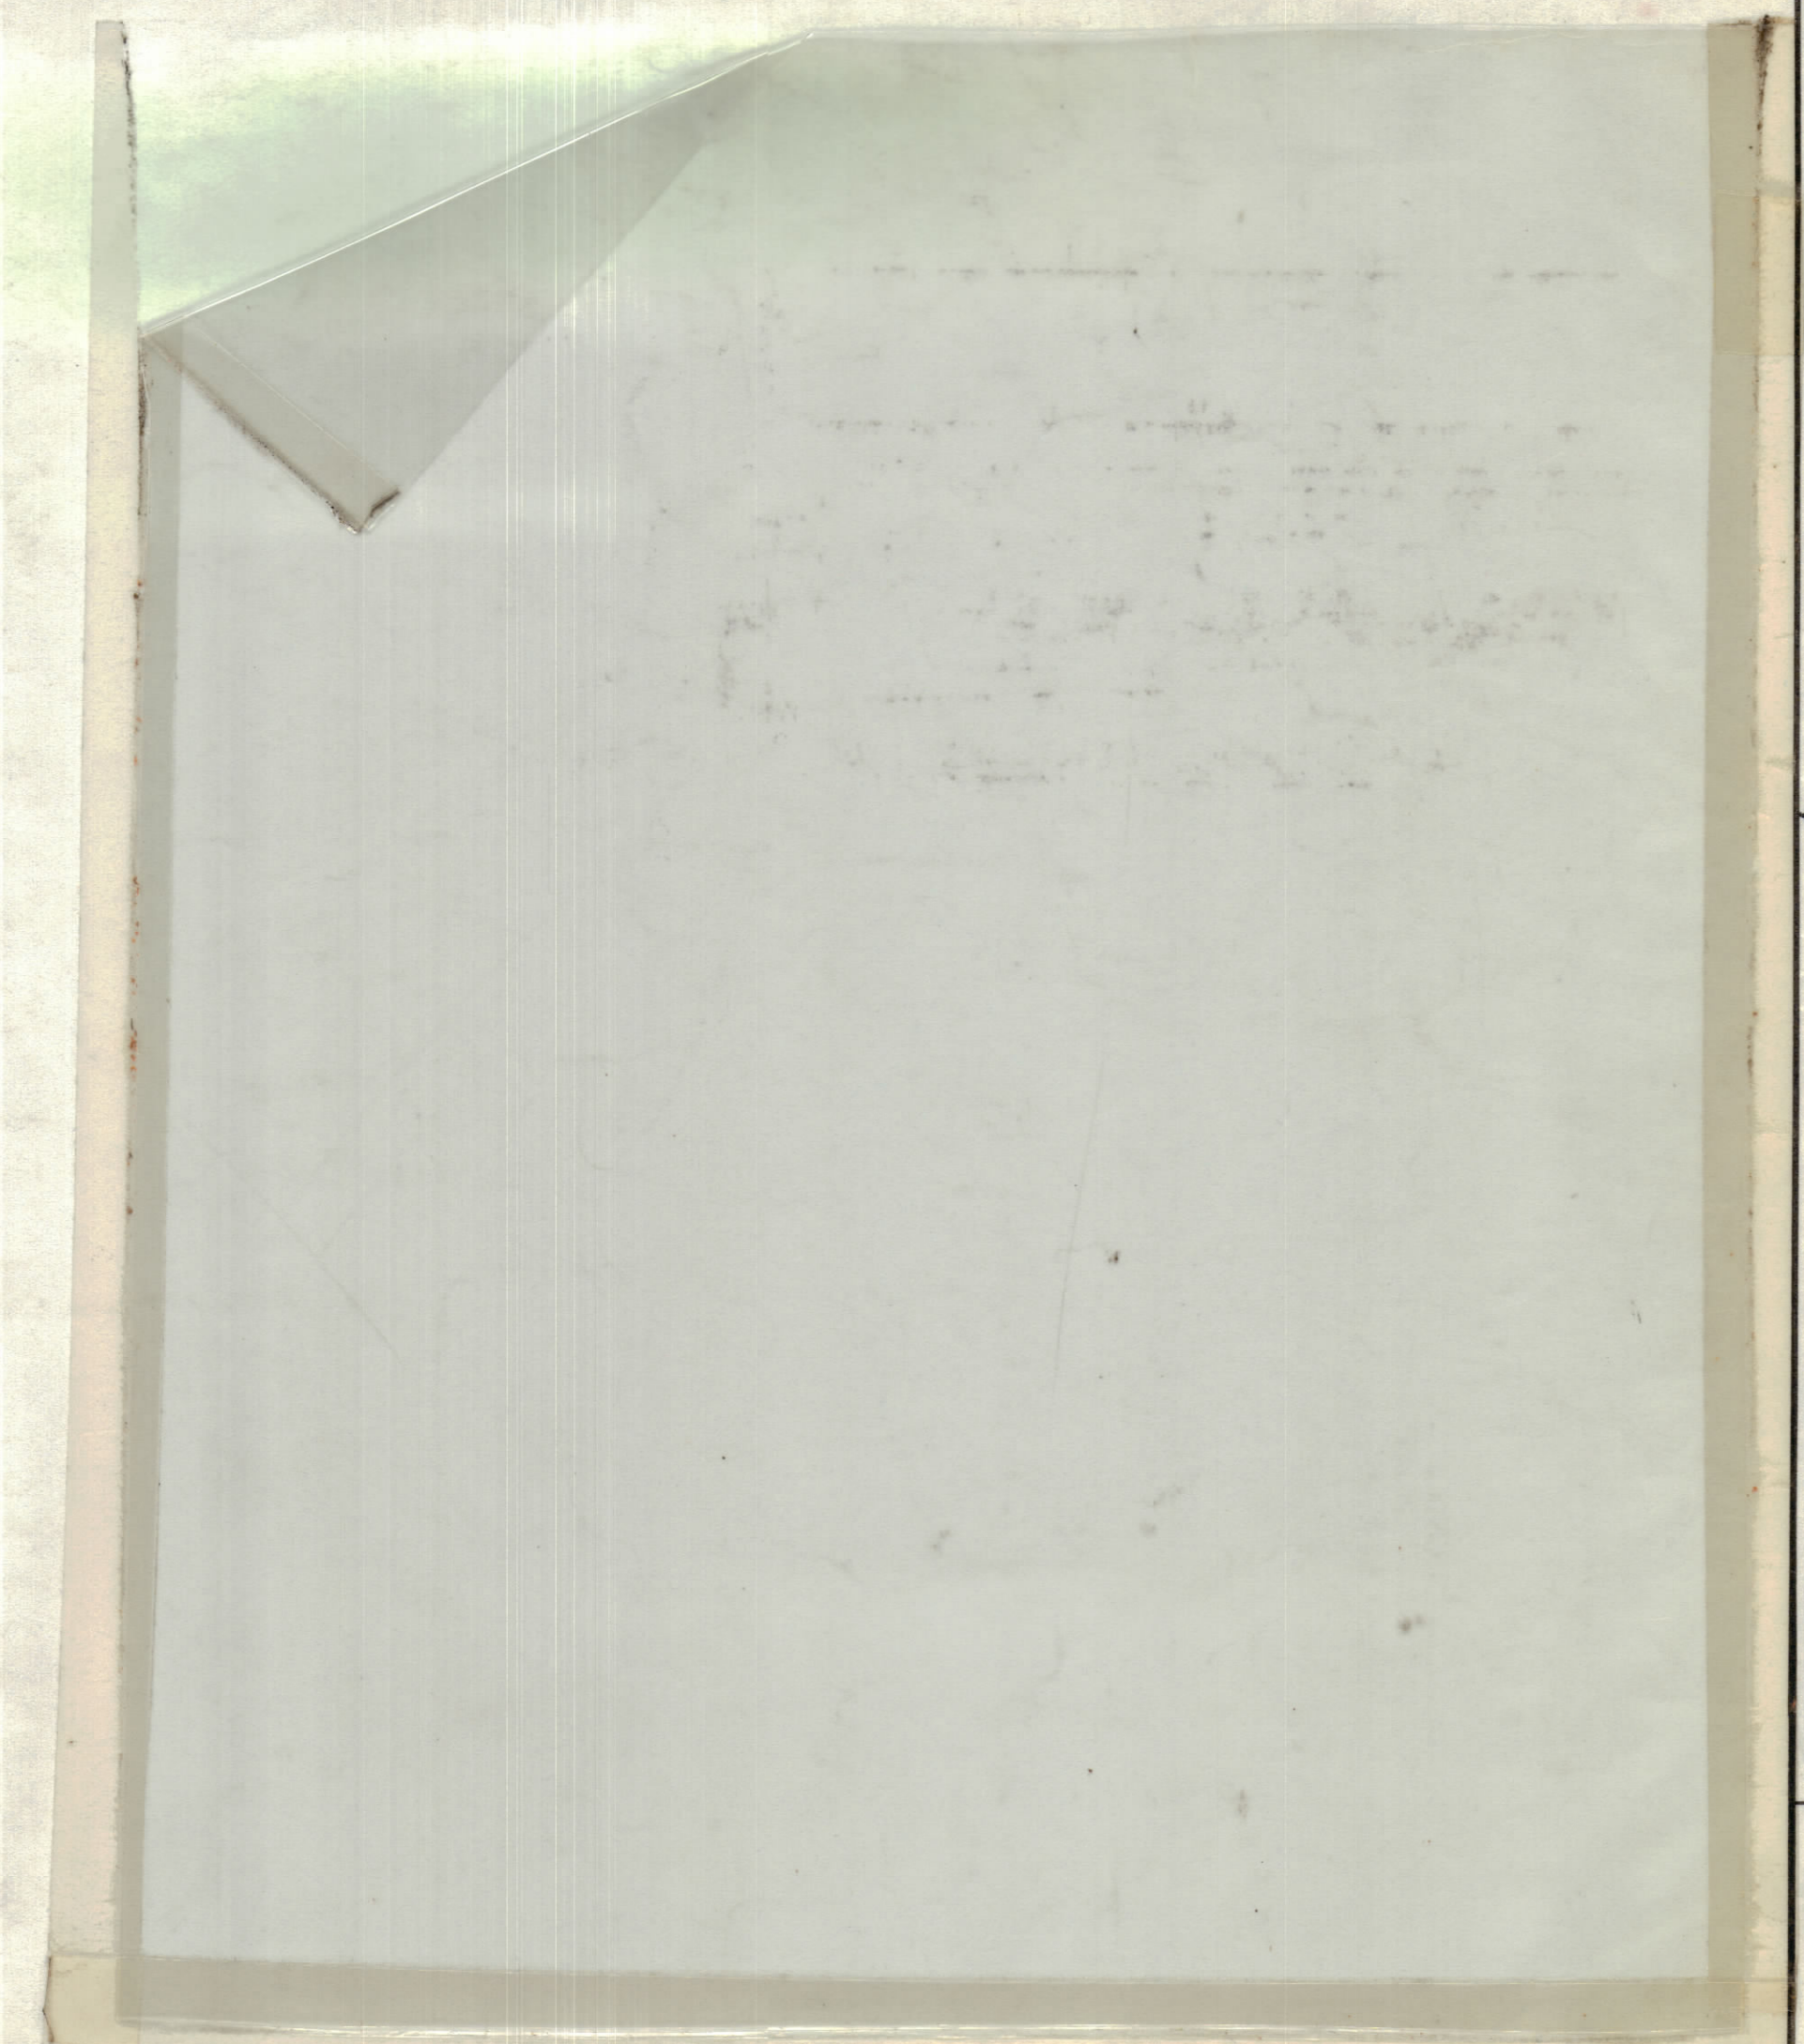

1	RTPH-3II SW CAB.	
QTY / UNIT	MODEL USED ON	ASS'Y NO.
APPLICATION		
	CODE S401-451	
NOTICE TO PERSONS RECEIVING THIS DRAWING		
THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.		

QTY. REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
FEATON LIST OF MATERIAL				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES				
TOLERANCES ON				
DECIMALS	FRACTIONS			
.X ± .05	± 1/64			
.XX ± .01	ANGLES			
.XXX ± .005	± 0° .30'			
MATERIAL				
FINISH				
FINAL APPROVAL		DATE		
MECH. DES.		DATE		
ELECT. DES.		DATE		
CHECKED		DATE		
DRAWN		DATE		
THE TECHNICAL MATERIEL CORP.		MAMARONECK, NEW YORK		
WIRING HARNESS, BRANCHED				
SIZE	CODE IDENT. NO.	DWG. NO.	ISSUE	
D	82679	CA1372	Ø	
SCALE 1:1		SHEET OF		