REVISIONS							
ZONE	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD	APPD
	X1	SHIELDS IN ZONES 3 & 8 DEL	1-15-69		JL		
	Ø	ORIGINAL RELEASE FOR PRODUCTION	1-20-69		EG		
	A	IT. 79 & 80 ADD., IT. 6 BRKOUT WAS 7	11/3/69	19636	KH		

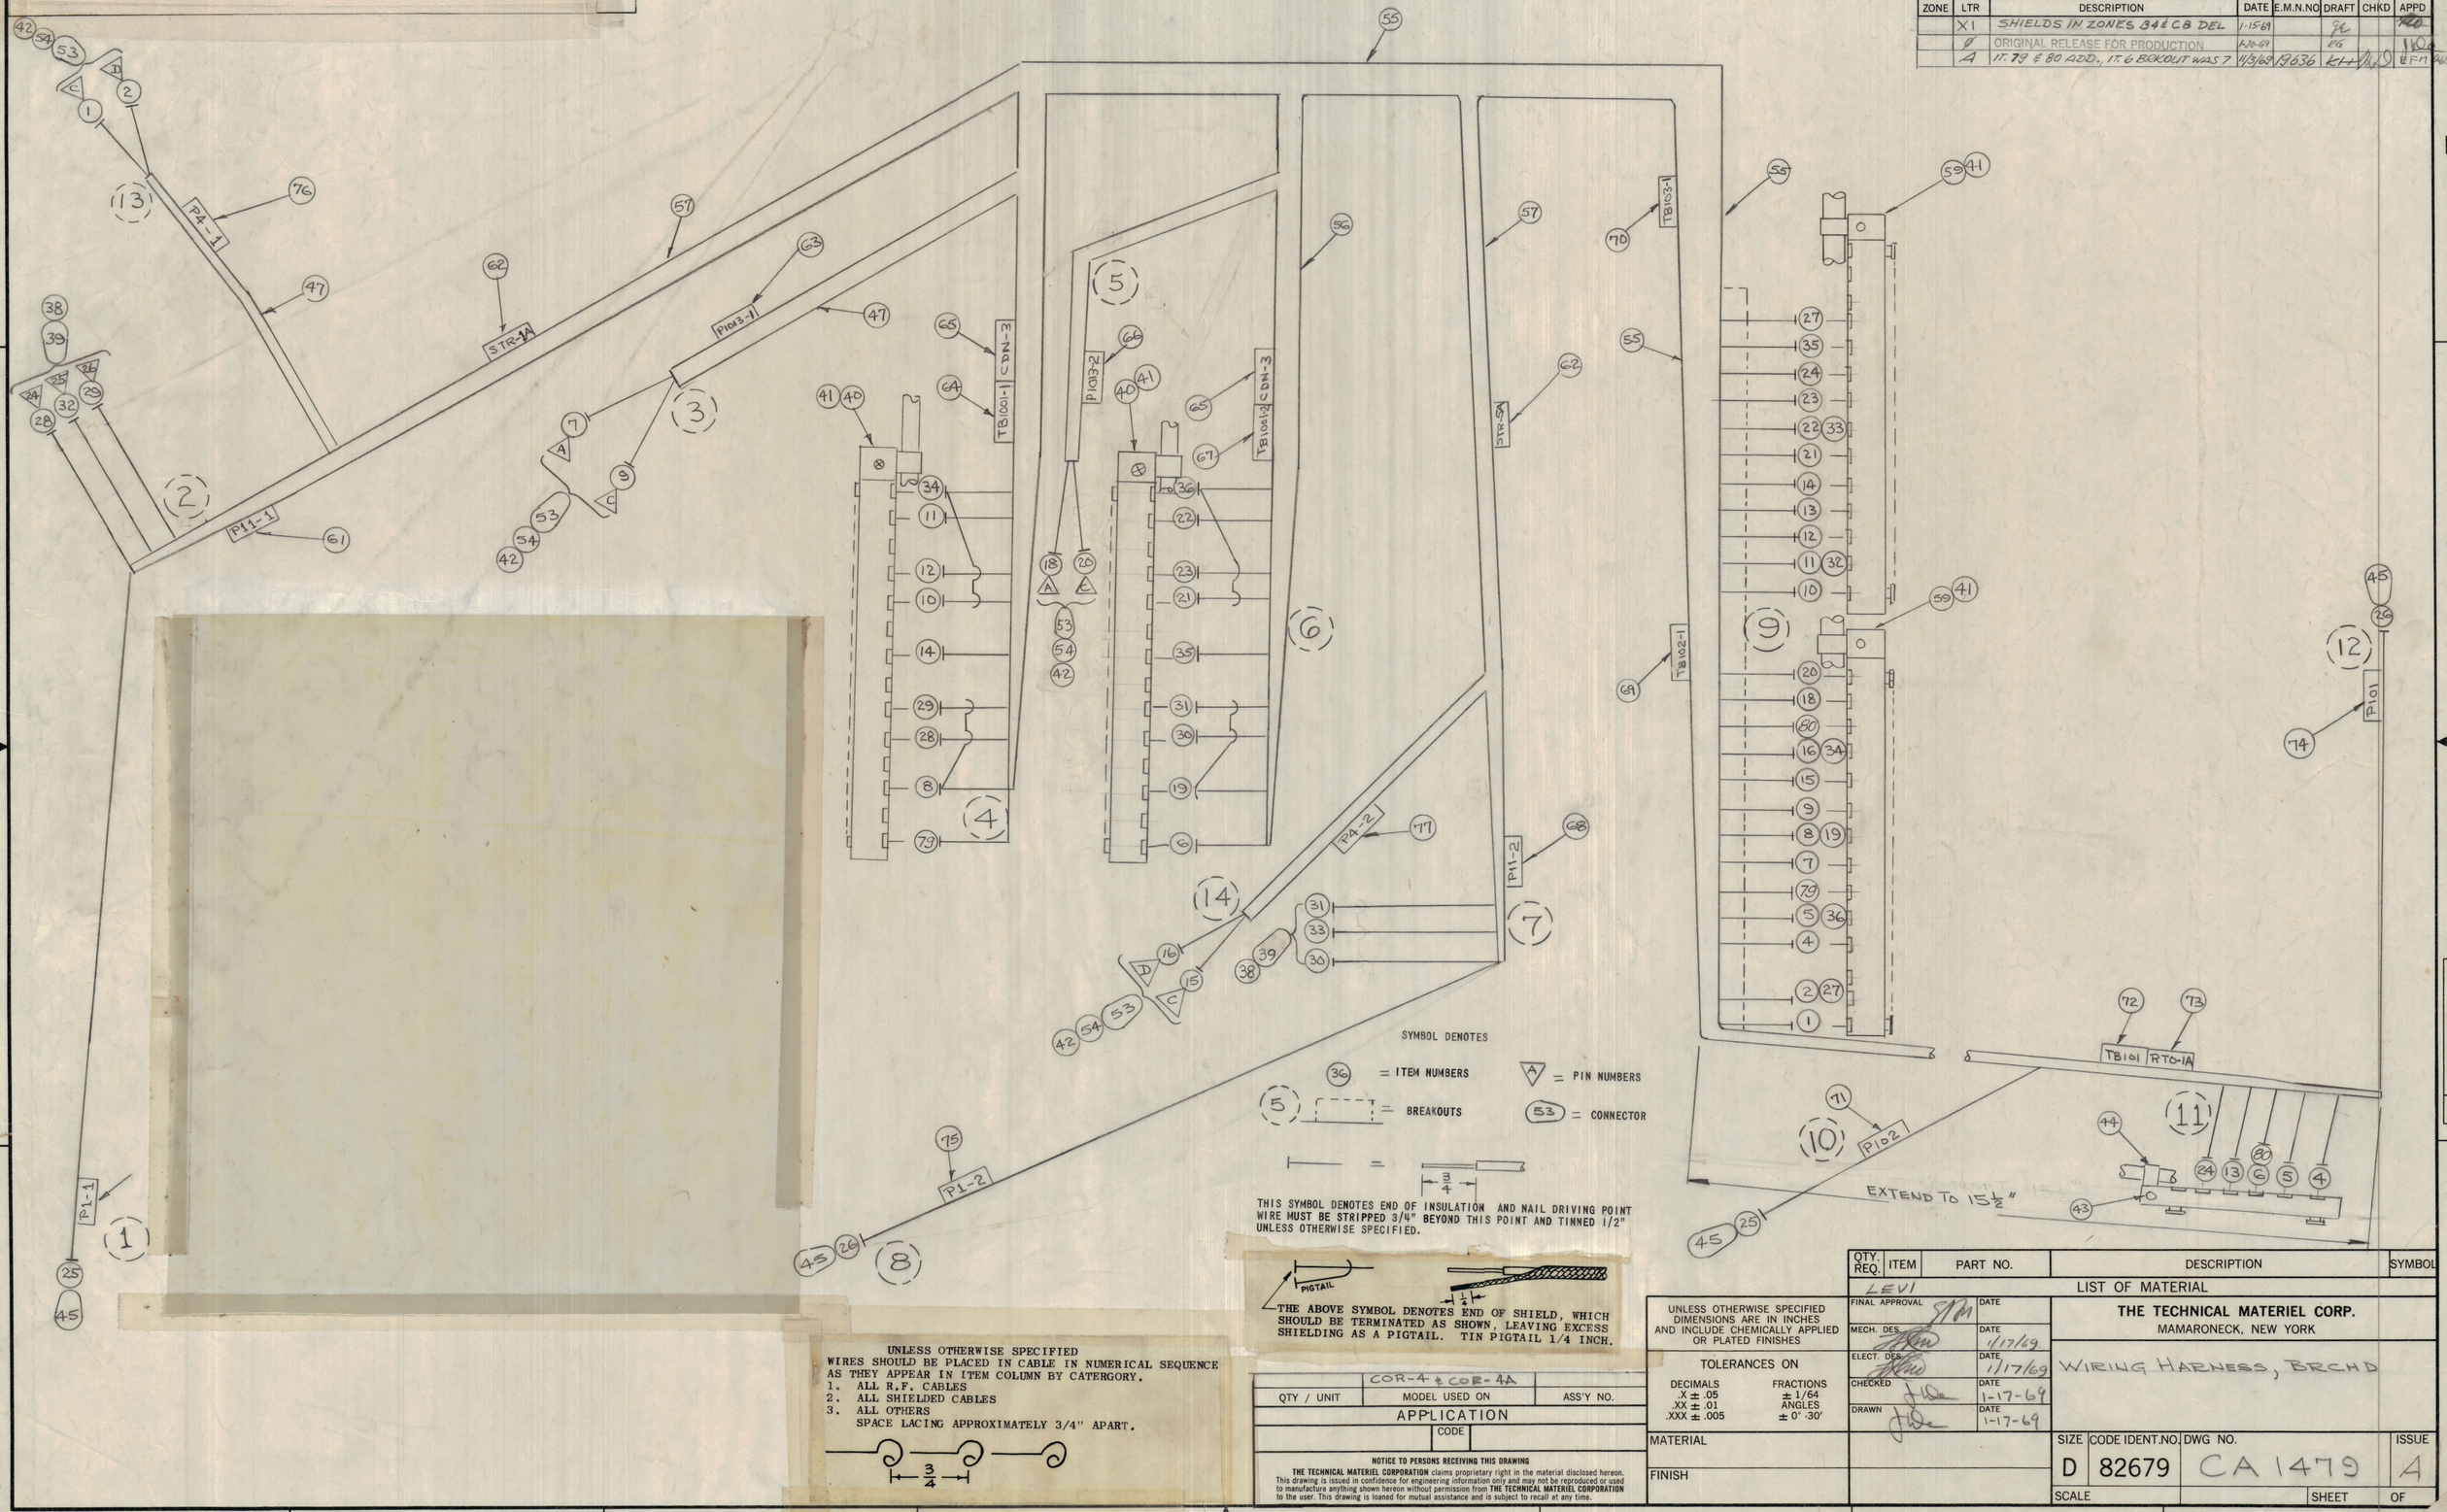

SYMBOL DENOTES

(36) = ITEM NUMBERS

A = PIN NUMBERS

(5) = BREAKOUTS

(53) = CONNECTOR

= 3/4

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

PIGTAIL — ½

THE ABOVE SYMBOL DENOTES END OF SHIELD, WHICH SHOULD BE TERMINATED AS SHOWN, LEAVING EXCESS SHIELDING AS A PIGTAIL. TIN PIGTAIL 1/4 INCH.

UNLESS OTHERWISE SPECIFIED
WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATERGORY.
1. ALL R.F. CABLES
2. ALL SHIELDED CABLES
3. ALL OTHERS
SPACE LACING APPROXIMATELY 3/4" APART.

3/4

QTY. REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		LEVI	LIST OF MATERIAL	

QTY / UNIT	MODEL USED ON	ASS'Y NO.
	COR-4 & COE-4A	

APPLICATION

CODE

NOTICE TO PERSONS RECEIVING THIS DRAWING
THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES ON

DECIMALS	FRACTIONS
.X ± .05	± 1/64
.XX ± .01	ANGLES
.XXX ± .005	± 0° 30'

MATERIAL

FINISH

		DATE
FINAL APPROVAL		
MECH. DES.		1/17/69
ELECT. DES.		1/17/69
CHECKED		1-17-69
DRAWN		1-17-69

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

WIRING HARNESS, BRCHD

SIZE	CODE IDENT. NO.	DWG NO.	ISSUE
D	82679	CA 1479	4

SCALE | SHEET | OF

FCI-10-170 (10-68)