



REVISIONS							
E.M.N.O	DRAFT	CHKD	ZONE	LTR	DESCRIPTION	DATE	APPROVED
	KLH			X	EXP. RELEASE	11/18/69	
	(1)			8	ORIGINAL RELEASE FOR PRODUCTION	4/18/70	



WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN. SPACE LACING APPROXIMATELY 3/4" APART.

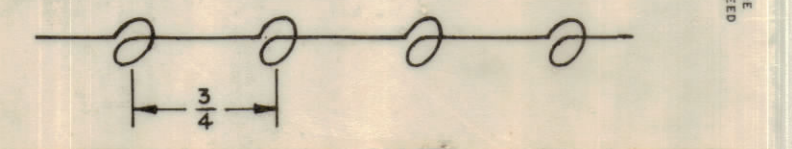

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.



- SYMBOL DENOTES
- = ITEM NO'S
 - ⬡ = DETAILED BREAKOUT LOCATIONS
 - ⊖ = BREAKOUTS
 - △ = CONNECTOR PIN NO'S

RTTD - 5A	
QTY / UNIT	ASS'Y NO.
MODEL USED ON	
APPLICATION	
CODE	

NOTICE TO PERSONS RECEIVING THIS DRAWING
 THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

QTY. REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
LIST OF MATERIAL				
FINAL APPROVAL		DATE	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
MECH. DES.		DATE		
ELECT. DES.		DATE		
CHECKED		DATE	WIRING, HARNESS BRCHD.	
DRAWN		DATE		
MATERIAL			SIZE	CODE IDENT NO.
FINISH			D	82679
			DWG NO.	CA 1527
			ISSUE	1
			SCALE	SHEET OF