


REVISIONS						
ZONE	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD
	X	EXPERIMENTAL RELEASE	3-25-70	—	KD	
	Ø	ORIG RELEASE FOR PROD	3-31-70		CV	

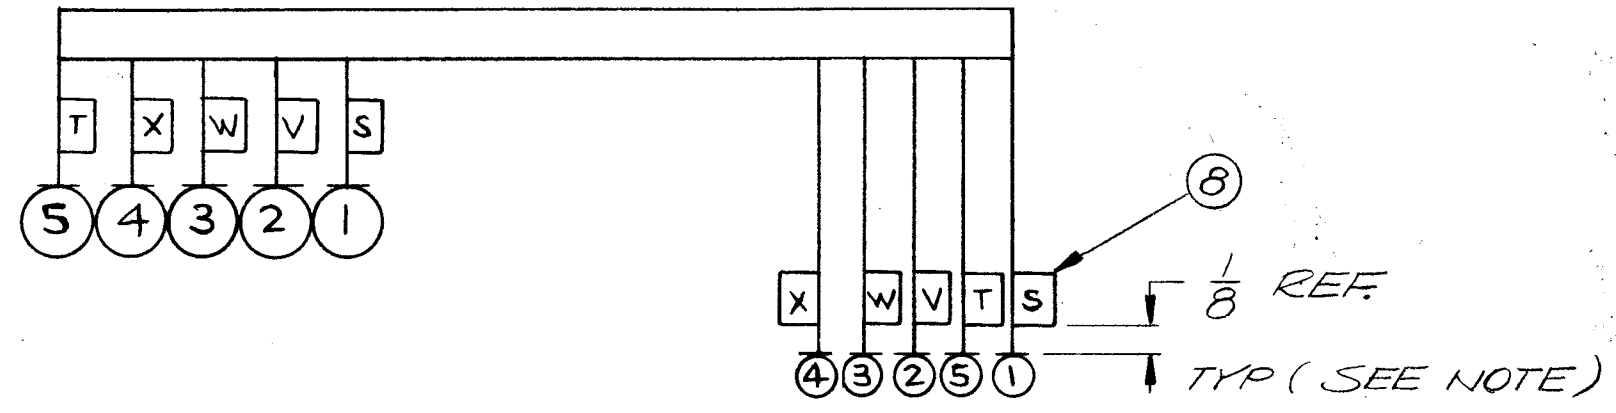

**LABEL NOTE:**  
ATTACH LABELS (LA 101 - )  
TO BOTH ENDS OF EACH WIRE


UNLESS OTHERWISE SPECIFIED  
WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE  
AS THEY APPEAR IN ITEM COLUMN BY CATERGORY.

1. ALL R.F. CABLES
2. ALL SHIELDED CABLES
3. ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.

*SYMBOL DENOTES*

○ = ITEM NO.  
□ = TAGS

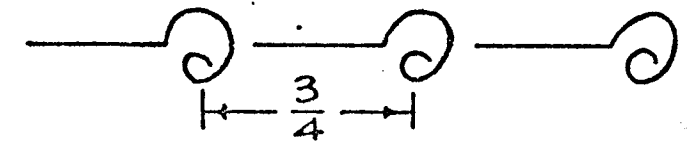

REQ'D	ITEM	PART NUMBER	FROM	TO	SYM.
	8	LA101	LABEL, MARKER		
	7	BS100	SOLDER, TIN ALLOY		
	6	CD101-1MW	CORD NYLON LACING		
	5	LWC 26(7)U 5	SIA-8R	T	
	4		SIA-9F	X	
	3		SIA-10F 8/10R	W	
	2		SIA-11F	V	
	1	LWC 26(7)U 1	SIA-12R	S	

REF: CK 1765

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED

1	HFS-4	AX 5105
QTY / UNIT	MODEL USED ON	ASS'Y NO.
APPLICATION		
	CODE	S401-

**NOTICE TO PERSONS RECEIVING THIS DRAWING**  
THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	FINAL APPROVAL	DATE
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	MECH. DES.	DATE
FRACTIONS 1/64	ELECT. DES.	DATE
TOLS. ANGLES 0°-30'	CHECKED	DATE
MATERIAL	DRAWN	DATE
FINISH		

LIST OF MATERIAL			
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
WIRING HARNESS BRANCHED FREQUENCY SWITCH			
SIZE	CODE IDENT. NO.	DWG NO.	ISSUE
B	82679	CA 1573	Ø
SCALE 1:1		SHEET OF	