


REVISIONS						
ZONE	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD APPD
	X	EXP RELEASE	3-26-70		KD	
	Ø	ORIG RELEASE FOR PROD	4/3/70		CV	
	A	REV. LENGTH OF 1 THRU 11	6/16/70	19881	KL	<i>[Signature]</i>

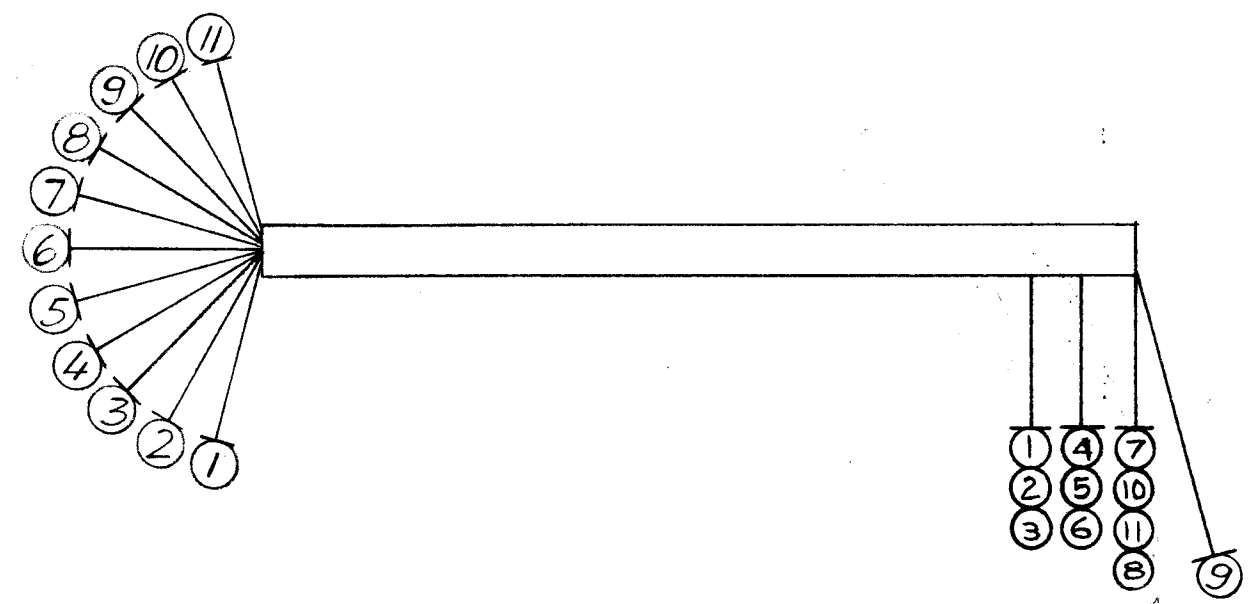


UNLESS OTHERWISE SPECIFIED
WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE
AS THEY APPEAR IN ITEM COLUMN BY CATERGORY.

1. ALL R.F. CABLES
2. ALL SHIELDED CABLES
3. ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.

SYMBOL DENOTES
○ ITEM

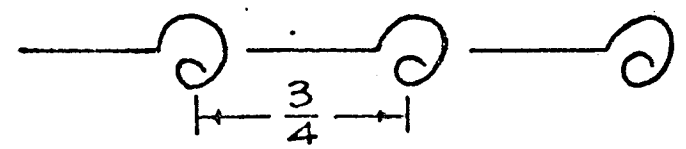

14	LA101	BAND , MARKER, CABLE		
13	BS100	SOLDER TIN ALLOY		
12	CD101-1MW	CORD NYLON LACING		
11	LWC26(7)U97	J	SIA- 2 FRONT	
10		0	K	SIA- 12
9		6	E	SIA- 8
8		7	H	SIA- 10
7		95	C	SIA- 1
6		9	P	SIB- 10
5		8	N	SIB- 11
4		98	F	SIB- 12
3		90	M	SIC- 10
2		93	D	SIC- 11
1	LWC26(7)U 5	L	SIE- 12 FRONT	
REQ'D ITEM	PART NUMBER	FROM	TO	SYM.

REF CK-1767

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

WIRING HARNESS BRANCHED
MODE SWITCH

SIZE B CODE IDENT. NO. 82679 DWG NO. CA 1577 ISSUE A

SCALE 1:1 SHEET OF 1

QTY / UNIT	MODEL USED ON	ASS'Y NO.
	MSA-4	AX 5002
APPLICATION		
	CODE	

NOTICE TO PERSONS RECEIVING THIS DRAWING
THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS: .X ± .05, .XX ± .01, .XXX ± .005
FRACTIONS: 1/64
TOLS. ANGLES: 0° -30'

MECH. DES. [Signature]
ELECT. DES. [Signature]
CHECKED [Signature]
DRAWN Deierlein

DATE 4-3-70
DATE 3/25/70

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED