
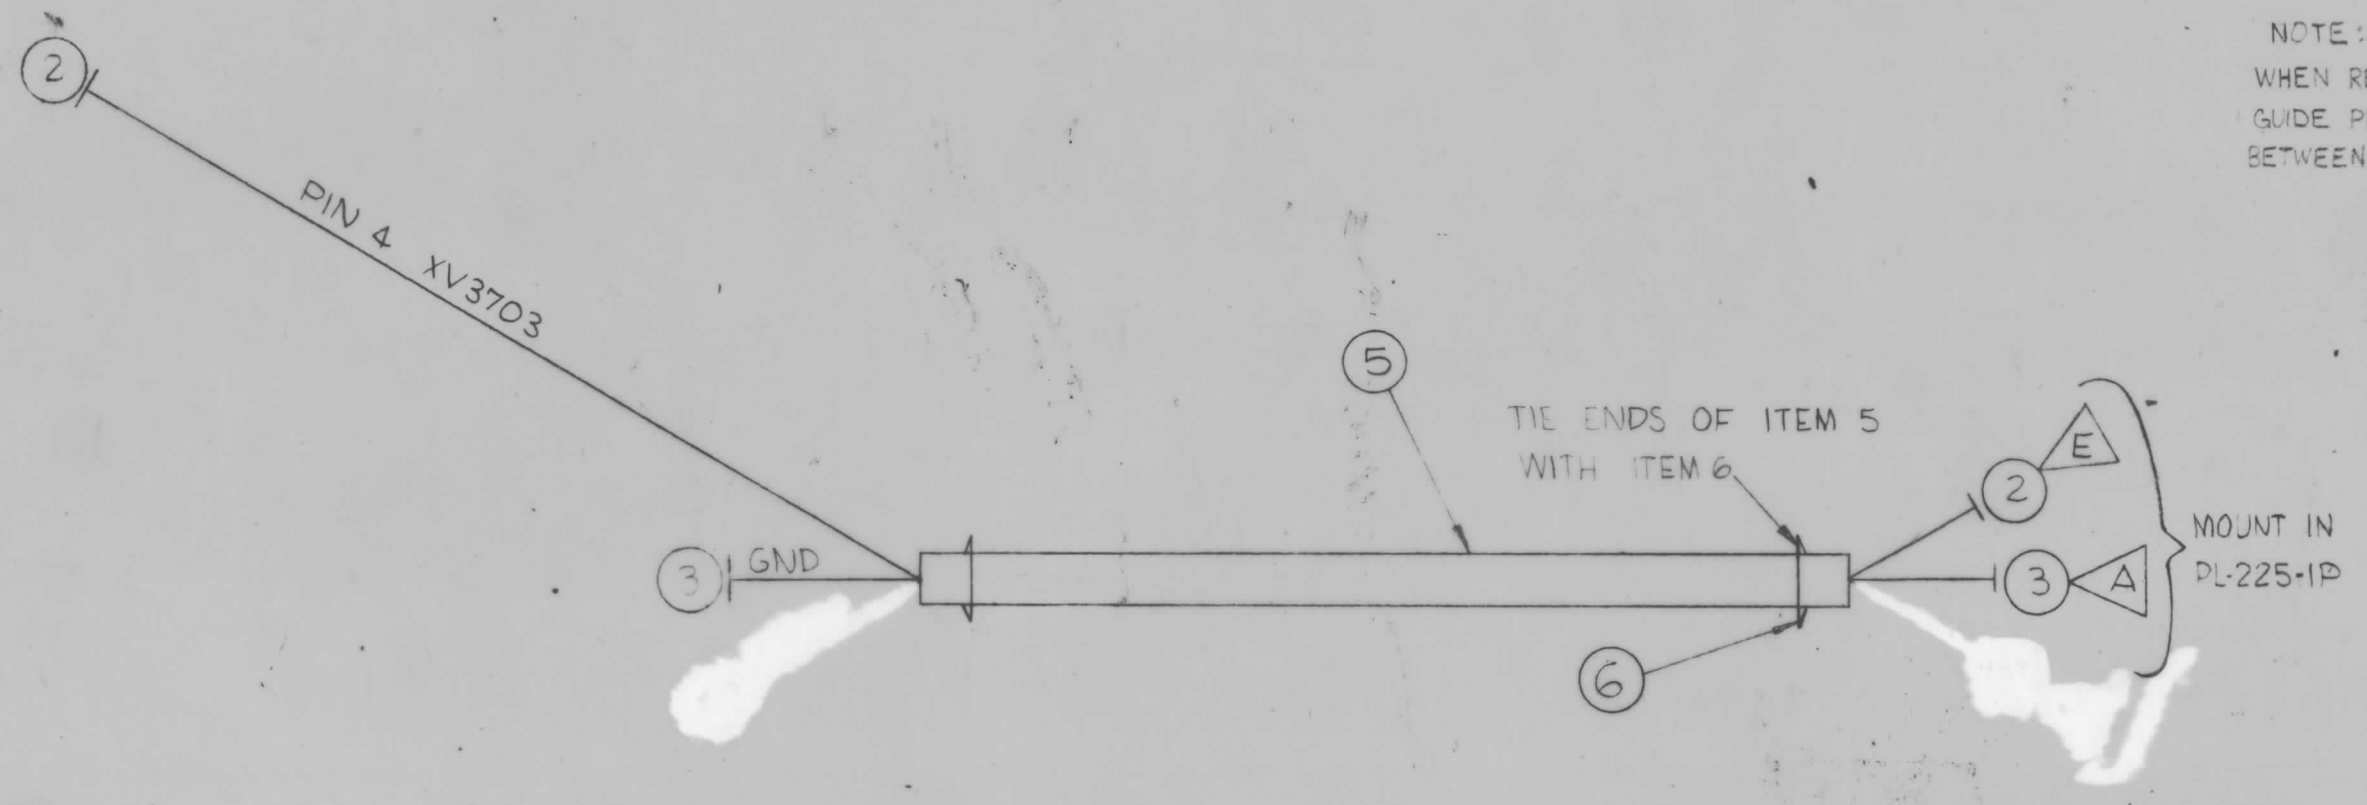



CA-1583

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

THIS SYMBOL DENOTES END OF INSULATION & NAIL DRIVING POINT WIRE MUST BE STRIPPED 1/2" BEYOND THIS POINT & TINNED 3/8" UNLESS OTHERWISE SPECIFIED.



NOTE:
WHEN RE-ASSEMBLING, MALE GUIDE PIN IS TO BE LOCATED BETWEEN PINS "D" & "E".

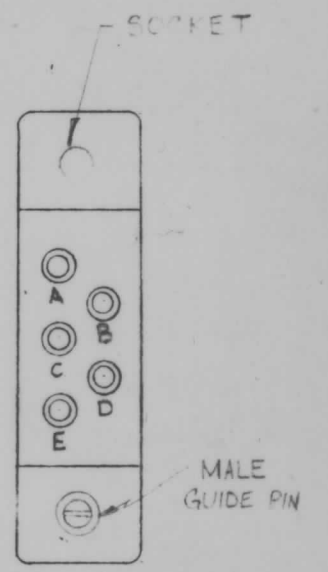

SYMBOL NOTES
 ○ DENOTES ITEM NO'S.
 △ DENOTES PIN NO'S.

X	7	BS-100	SOLDER, SOFT	
X	6	CD-101-I-MW	CORD LACING	BLACK
4 7/8	5	PX-100-1-187	SLEEVING, INSULATION	BLACK
	4	DELETED		
7 3/8	3	MWC24(7)UO	CABLE, INSULATED	BLACK
11 3/8	2	MWC24(7)LI	CABLE, INSULATED	BROWN
1	1	PL-225-IP	PLUG, MALE 5 PIN	P3701

REQ. UNIT	ITEM	PART NO.	STRUMER DESCRIPTION	SYMBOL
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
CABLE ASSY ELECTRICAL (INTERCONNECT)				
MATERIAL			GE	DB
TYPE & TEMPER		HEAT TREAT, SPEC.	DRAWN	CHECKED
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	FINAL APPROVAL
				CA-1583

Ø ORIGINAL RELEASE	5/9/73	CS				
X EXP RELEASE	8/2/70	GE				
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED:		SCALE:				
DIMENSIONS ARE IN INCHES		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.				
TOLERANCES ON FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 1/2°		REMOVE ALL BURRS AND SHARP EDGES				
REQ. PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE	USED ON	
	KIT-357			8-15-62		