


UNLESS OTHERWISE SPECIFIED
 WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE
 AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.
 1. ALL R.F. CABLES
 2. ALL SHIELDED CABLES
 3. ALL OTHERS
 SPACE LACING APPROXIMATELY 3/4" APART.

THIS SYMBOL DENOTES END OF INSULATION
 AND NAIL DRIVING POINT. WIRE MUST BE
 STRIPPED 3/4" BEYOND THIS POINT AND
 TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

THE ABOVE SYMBOL DENOTES END OF SHIELD, WHICH
 SHOULD BE TERMINATED AS SHOWN, LEAVING EXCESS
 SHIELDING AS A PIGTAIL. TIN PIGTAIL 1/4 INCH.

THIS SYMBOL INDICATES END OF SHIELDING.

REVISIONS					
ZONE	BY	DESCRIPTION	DATE	CHKD.	APPD.
0		ORIGINAL RELEASE FOR PRODUCTION	8/21/51	CD	CR

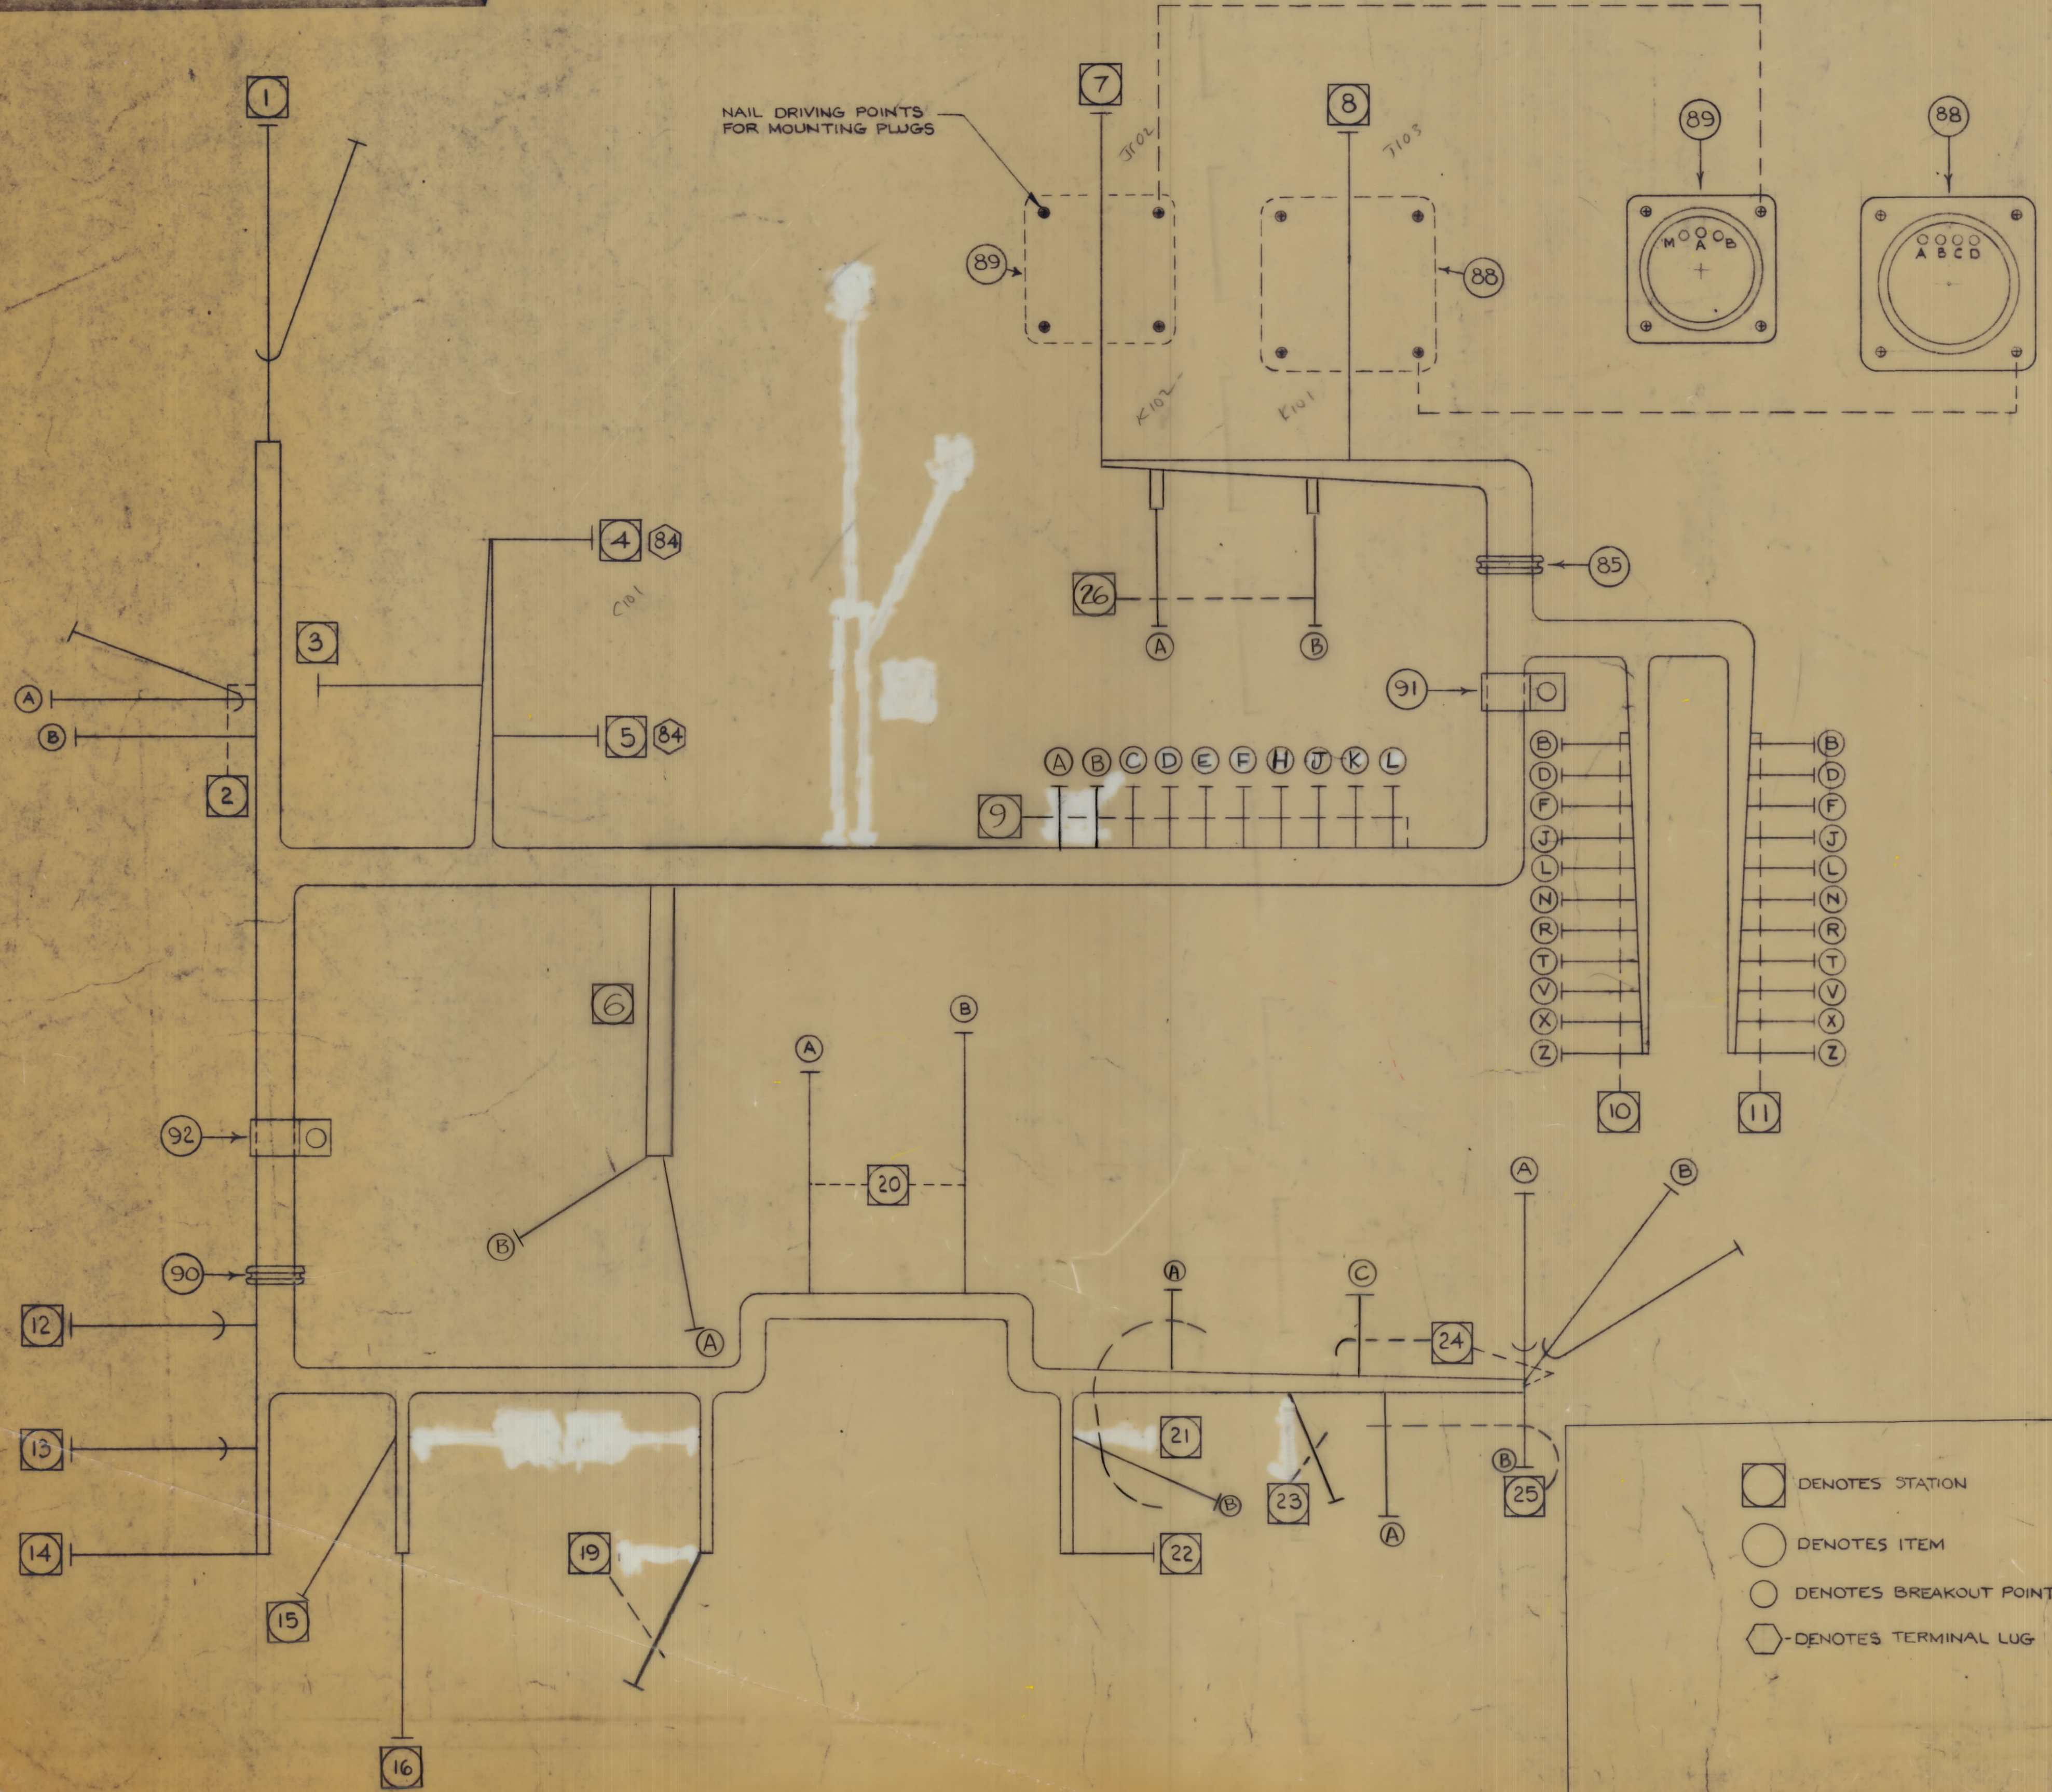

- DENOTES STATION
- DENOTES ITEM
- DENOTES BREAKOUT POINT
- ⬡ DENOTES TERMINAL LUG

NOTES

MATERIAL		FINISH		QTY/UNIT		SCALE		LSCA-Z		MODEL USES ON		ASBY. NO.	
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		TITLE WIRING HARNESS, BRANCHED		DRAWN RLL		DATE 8-21-51		FINAL APPROVAL J. J. Mar... 8-21-51		CHECKED RLL		DATE 8-21-51	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE DIMENSIONS APPLIED ON PLATED FINISHES		DECIMALS 1/16		FRACTIONS 1/4		TOLERANCES ± 0.01		ANGLE ± 1/2		HOLE ± 0.01		REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.	

CA1649