

IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:
THE TECHNICAL MATERIEL CORPORATION
MAMARONECK, NEW YORK

NOTE:

WIRE LENGTHS SHOWN ARE TOTAL LENGTHS AND ALLOW 1/2" EACH END FOR STRIPPING & TINNING


NOTE:

ALL LEADS STRIP AND TIN 1/2 INCH

CABLE WILL BE BENT 90° THESE POINTS (2) IN ASSEMBLY

MUST BE CLOSE STITCHED AT THESE POINTS

BOTTOM OF CABLE SHOWN

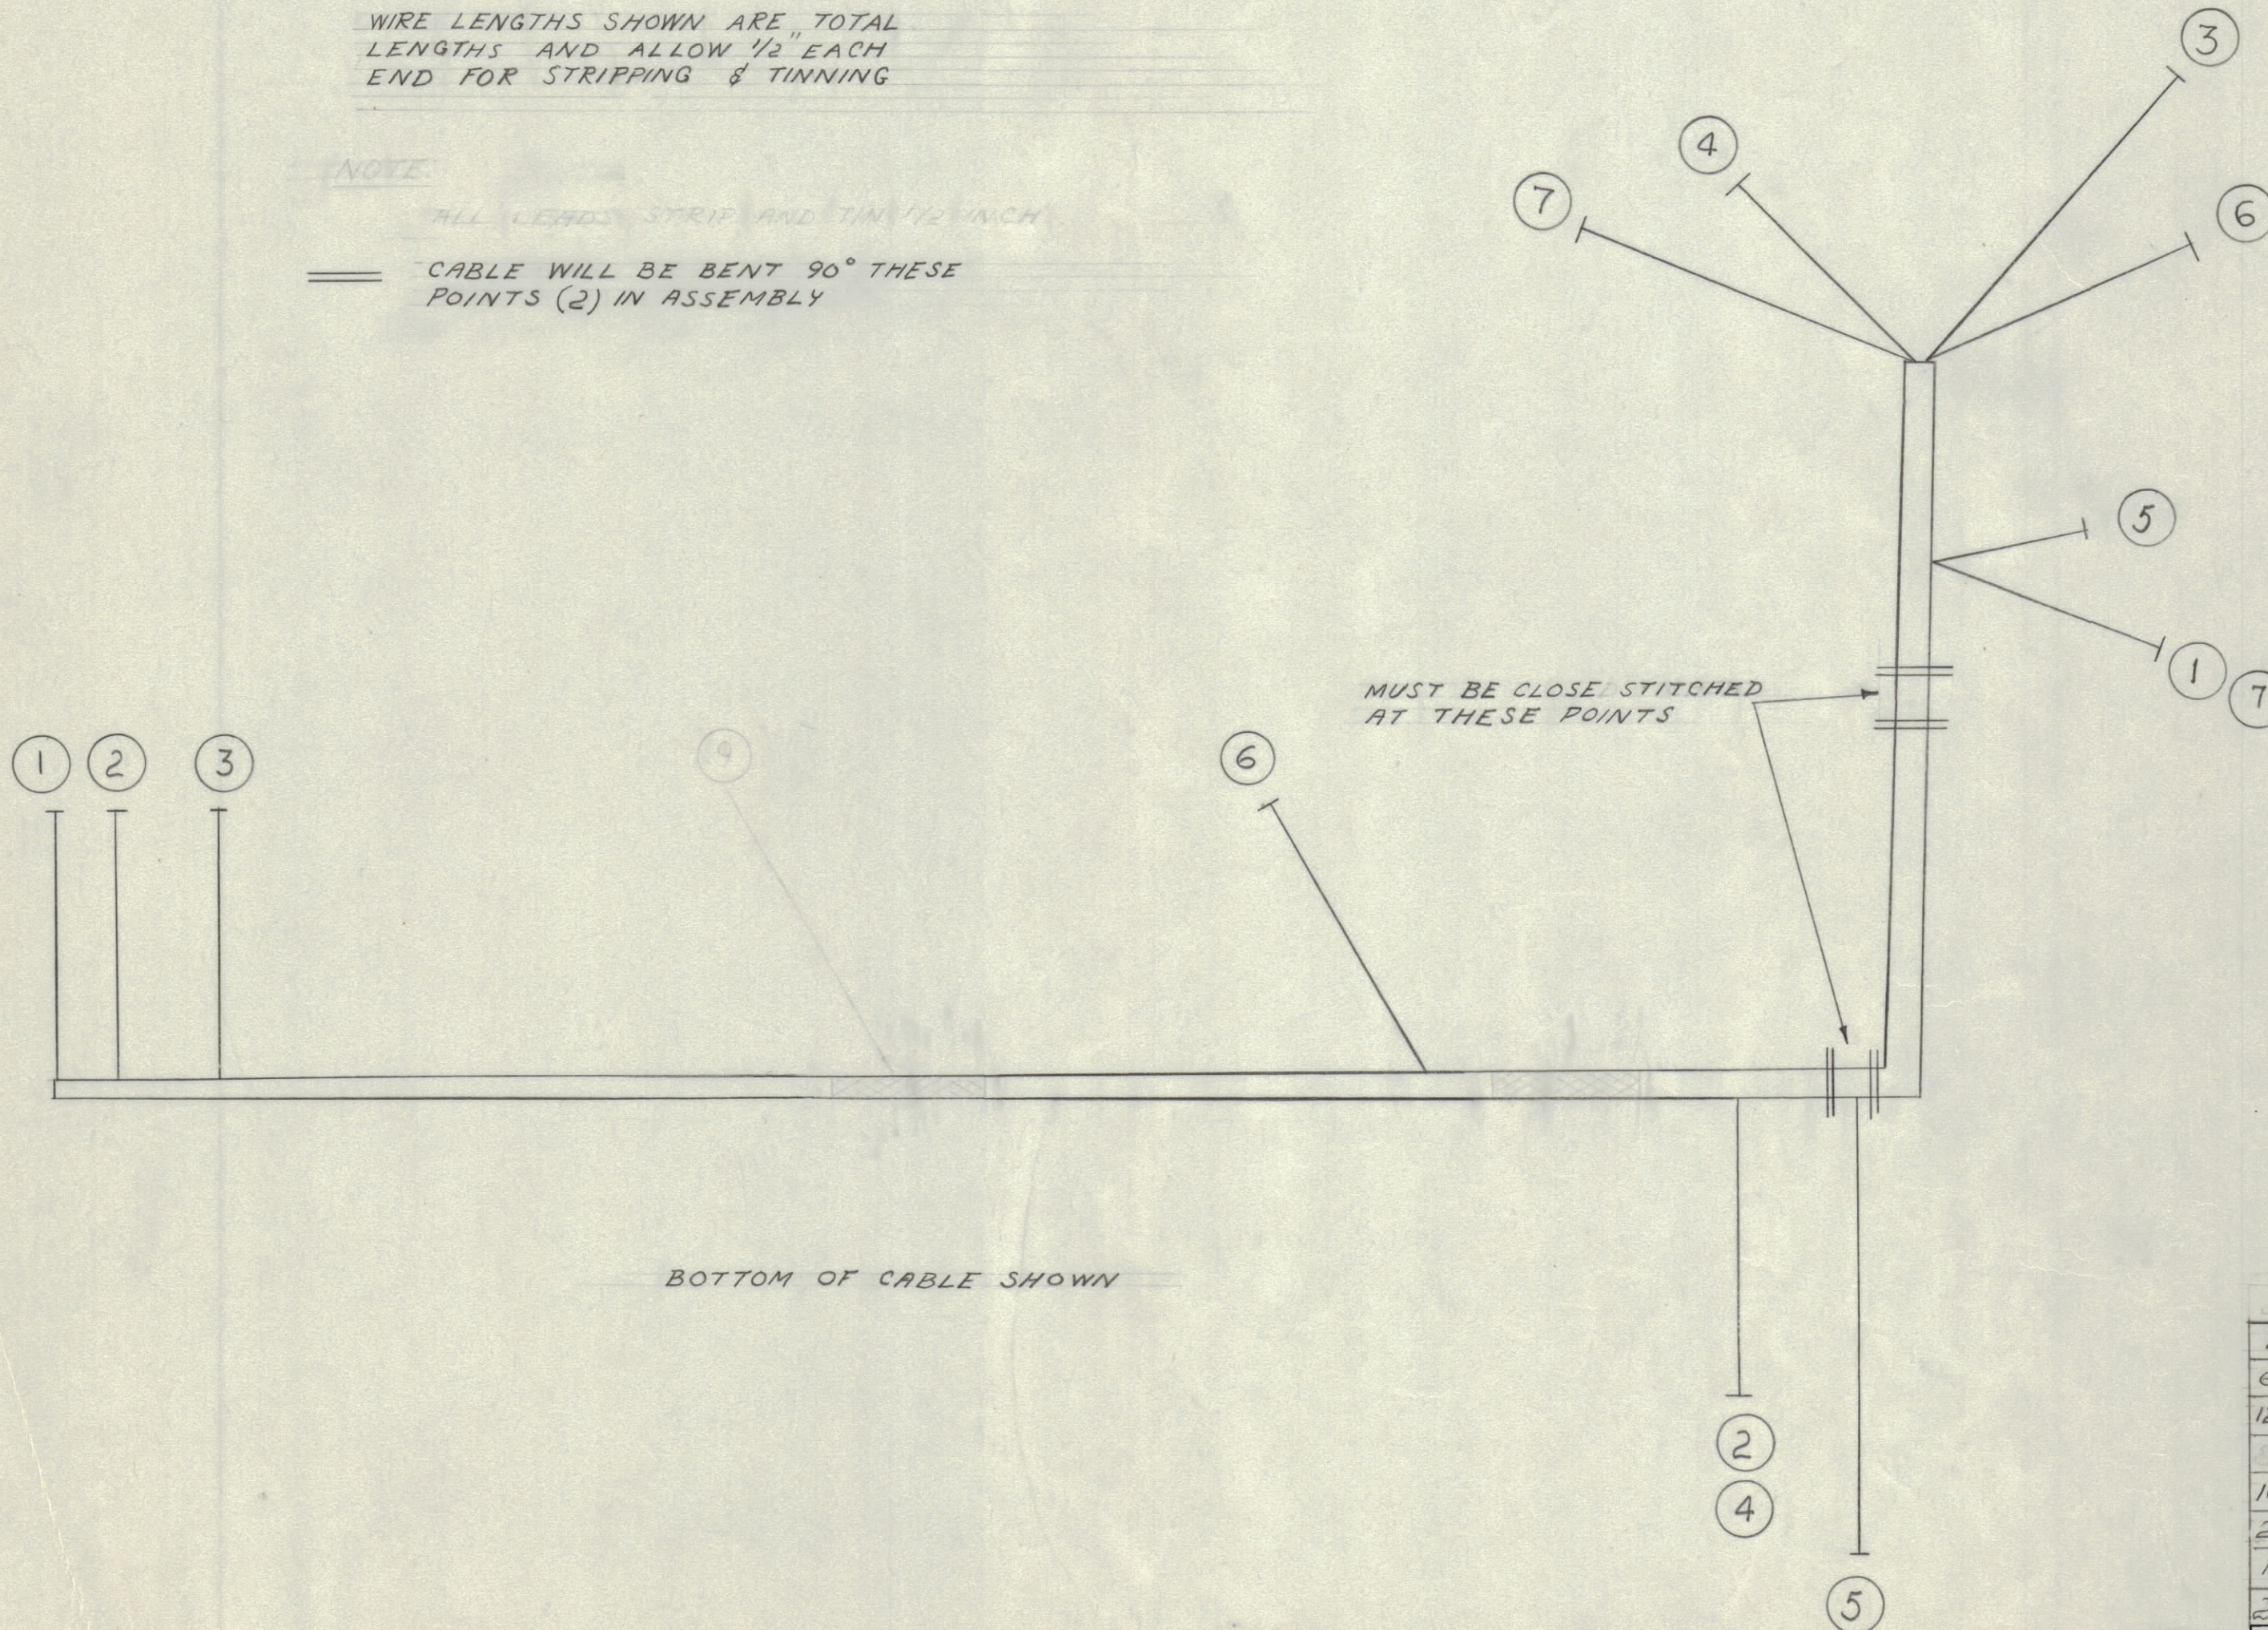

CA-214 B

B	1	WIRE LENGTHS CHANG.	11-22-54	2	RO. Janda	W.S.Z.
A	1	COMPLETELY REV.	11-3-54	1	P.B. COO	A.J.J.

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.

TOLERANCES		SCALE:
ALL	DEC. DIM. ±	DRILL, PUNCH, COMMERCIAL STOCK
OTHERS	FRAC. DIM. ±	SIZES AND MANUFACTURERS
	ANGULAR DIM. ±	TOLERANCES ARE NOT INCLUDED.

1	BFP-2		A-793	11-4-1954
REQ. PER. UNIT	MODEL	PROJECT NO.	ASSY. NO.	DATE
	USED ON			

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
X	B	CD-100-2	LACING CORD	
6 1/2	T	SRIR 3/4 (7) 220-95	CABLE, INSULATION WH. GR.	
12 3/4	6	93		WH. OR.
9	5	92		WH. RED
10 1/2	4	90		WH. BLK.
21	3	96		WH. BL.
15 1/2	2	90		WH. BLK.
20	1	SRIR 3/4 (7) 220-95		WH. GR.
STOCK SIZE		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
MATERIAL		CABLE, CHANNEL #2		
WEIGHT PER PC.		MODEL - BFP-2		
TYPE & TEMPER		P.B. 11-1-54 ELEC. DES. APP. A.J.J. MECH. DES. APP. W.S.Z.		
HEAT TREAT. SPEC.		A.J.J. FINAL APPROVAL		
FINISH & SPEC. NO.		CA-214 B		