

IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

STANDARD DRAWING

CA-238

USED ON


DATE

ASSY. NO.

PROJECT NO.

MODEL

REQ. PER UNIT

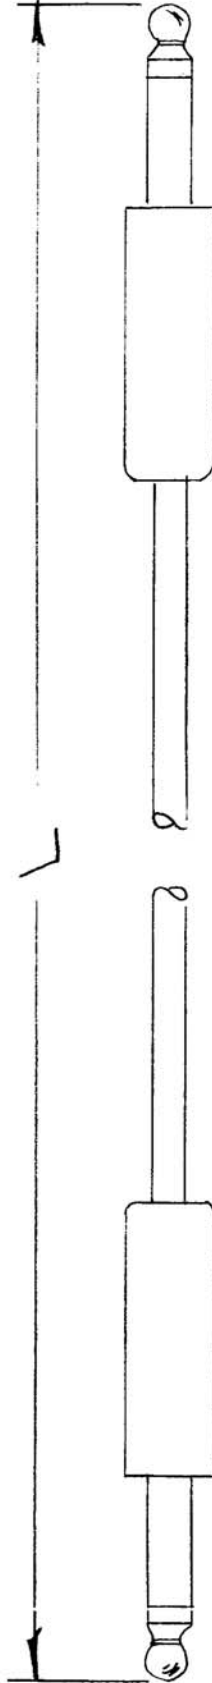

Specifications:

Plugs shall be of twin type, insulated for 500 volts R.M.S. breakdown.
Cord shall be tinned copper 1-conductor stranded wire, completely shielded and insulated. Heavy braid cover. Shield grounded at both ends of cord.

CA-238 - 1
Dwg. No. Length in Feet (L)

TMC No.	ADC No.	Nomenclature	L
CA-238-1	PJ-51	1 Foot	1½'
CA-238-2	PJ-52	2 Feet	2½'
CA-238-3	PJ-53	3 Feet	3½'
CA-238-4	PJ-54	4 Feet	4½'
CA-238-5	PJ-55	5 Feet	5½'

Ref: Audio Development Co.

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
	STOCK SIZE		
	MATERIAL	CORD, AUDIO-PATCH	
	WEIGHT PER PC.	SINGLE	
	TYPE & TEMPER		
	HEAT TREAT. SPEC.		
	FINISH & SPEC. NO.		
	DRAWN	ELEC. DES. APP.	MECH. DES. APP.
	FAIRBANKS	CMAS	WOL
	CHECKED	FINAL APPROVAL	

ISSUE ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS CHECKER	ENG. APP.
TOLERANCES					
SCALE					
DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.					
ALL DEC. DIM. ±					
OTHERS FRAC. DIM. ±					
ANGULAR DIM. ±					