REQ. PER UNIT	MODEL	ASS'Y. NO.	DATE	USED ON
1	A959		4-20-56	CA-297

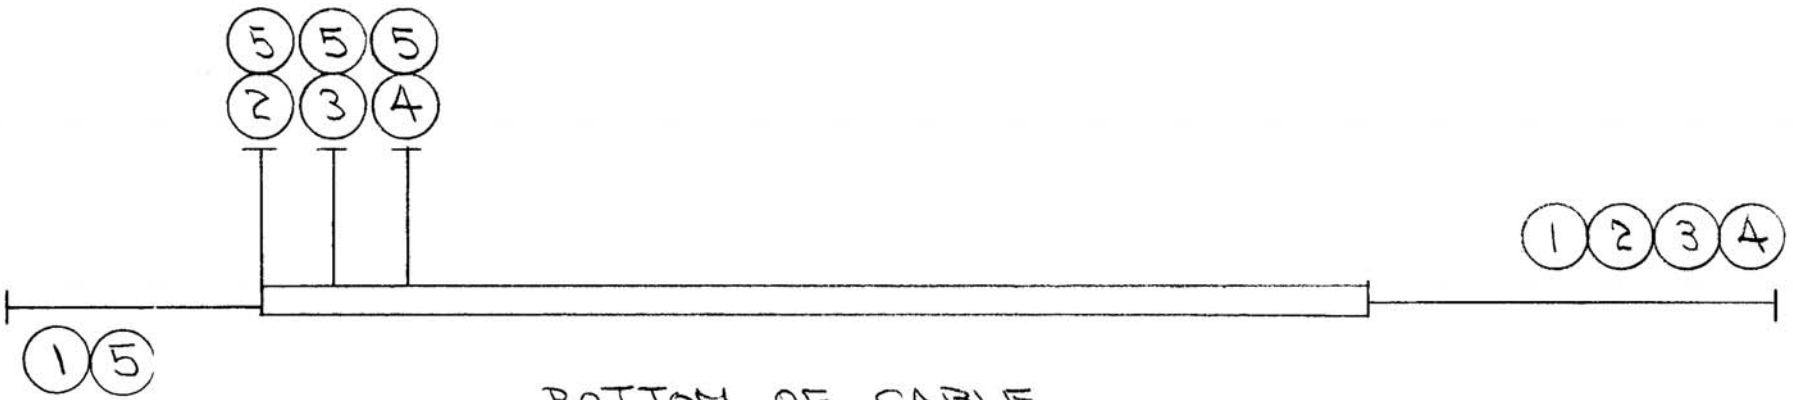

BOTTOM OF CABLE

WIRE: LENGTH SHOWN ARE TOTAL LENGTHS AND ALLOW 1/2" EACH END FOR STRIPPING & TINNING

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
X	7	BS-100	SOLDER, SOFT	
X	6	CD-101-3MW	LACING CORD	
4	5	TE-120-2	TERMINAL LUG	
8 7/8	4	SRIR 3/5(7) 22U 66	CABLE, INSULATED	BLUE
9 1/4	3	44	"	YEL
9 5/8	2	22	"	RED
10 1/4	1	00	"	BLK

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE:

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. N .

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

CABLE, PLUG TO XFK TERM.

BOARD A959

DRAWN	CHECKED	FINAL APPR VAL
CDD 4/24/56		A.J.J.
JB		CA-297
ELEC. DES. APP.	MECH. DES. APP.	

FORM - 108 - A