


CA-345

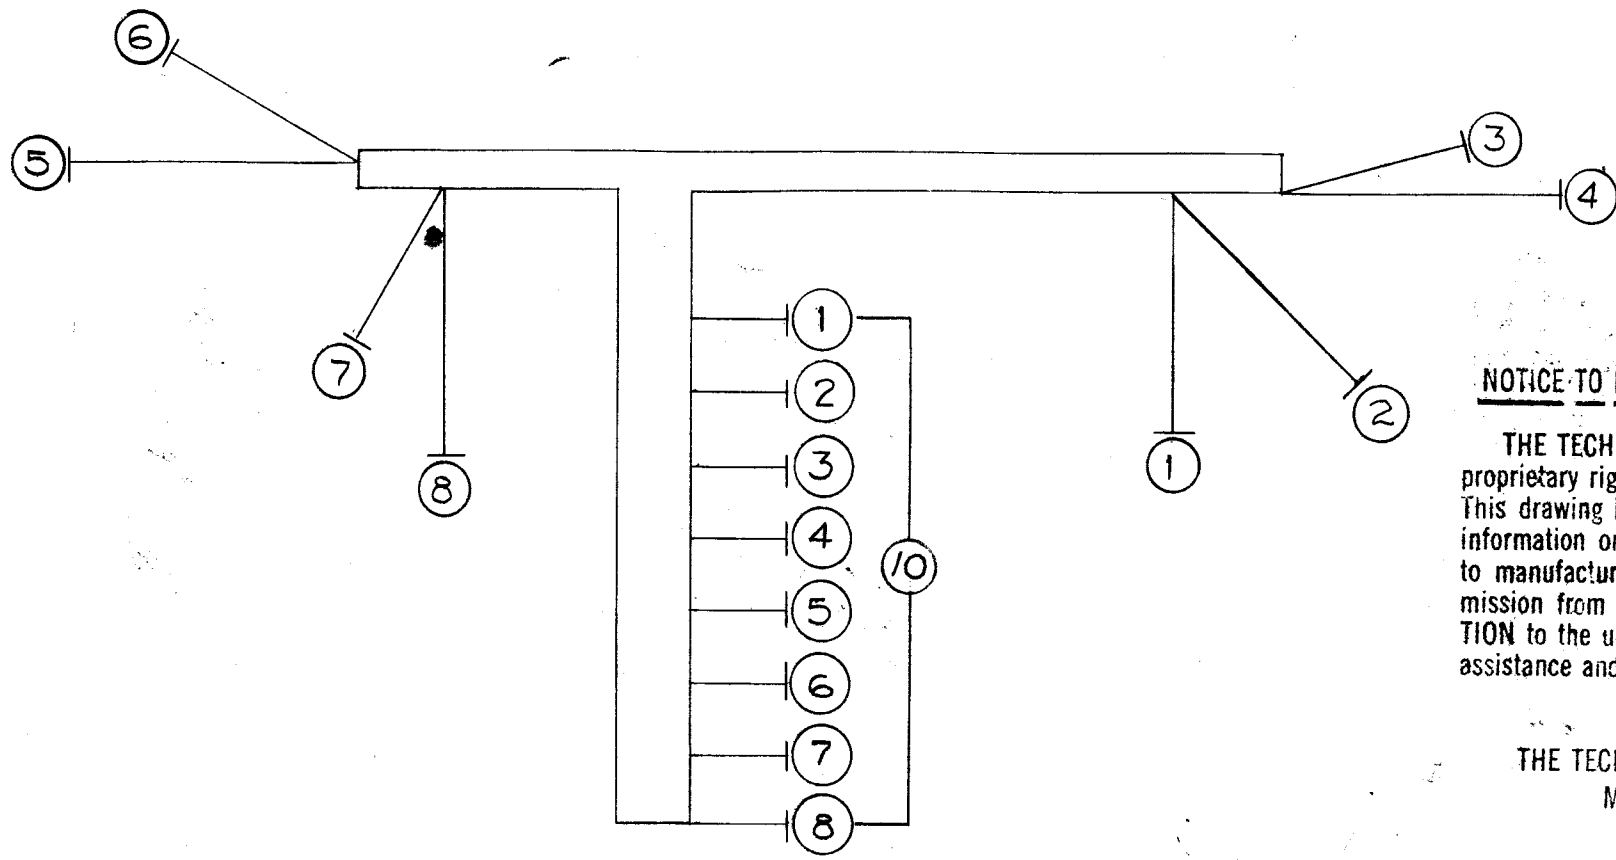

**NOTICE TO PERSONS RECEIVING THIS DRAWING**

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:  
THE TECHNICAL MATERIEL CORPORATION  
MAMARONECK, NEW YORK

BOTTOM OF CABLE SHOWN  
ALLOW 1/2 INCH EACH END FOR  
TINNING AND STRIPPING.

8	10	TE-120-2	TERMINAL LUG	
	9	GD-101-3-MW	CORD, LACING	
7 1/2	8	MWC 22(7)U5	CABLE, INSULATED	GRN.
7	7		95	WH. GRN.
7 1/2	6		92	WH. RED
7 1/2	5		2	RED
8 1/2	4		5	GRN.
7 7/8	3		95	WH. GRN.
7 1/2	2		92	WH. RED
6 1/2	1		2	RED

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
CABLE, ASSEMBLY			
QDP - S4 SERIES			
MATERIAL			
TYPE & TEMPER		HEAT TREAT. SPEC.	
DRAWN		CHECKED	FINAL APPROVAL
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.

ISSUE ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES		SCALE:				
DEC. DIM. ±		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES				
FRAC. DIM. ±						
ANGULAR DIM. ±						

2	QDP	A-1350	7-22-57
REQ. PER UNIT	MODEL	PROJECT NO.	ASS'Y. NO.
USED ON			

CA-345