


# STANDARD DRAWING

FOR MARKING INSTRUCTIONS  
SEE SPEC. LISTED

WHEN USED ON MODEL SEE SPEC  
CHG-1 S-538

REQ. PART UNIT  
MODEL  
USED ON ASS'Y. NO.  
DATE

CA-350 B

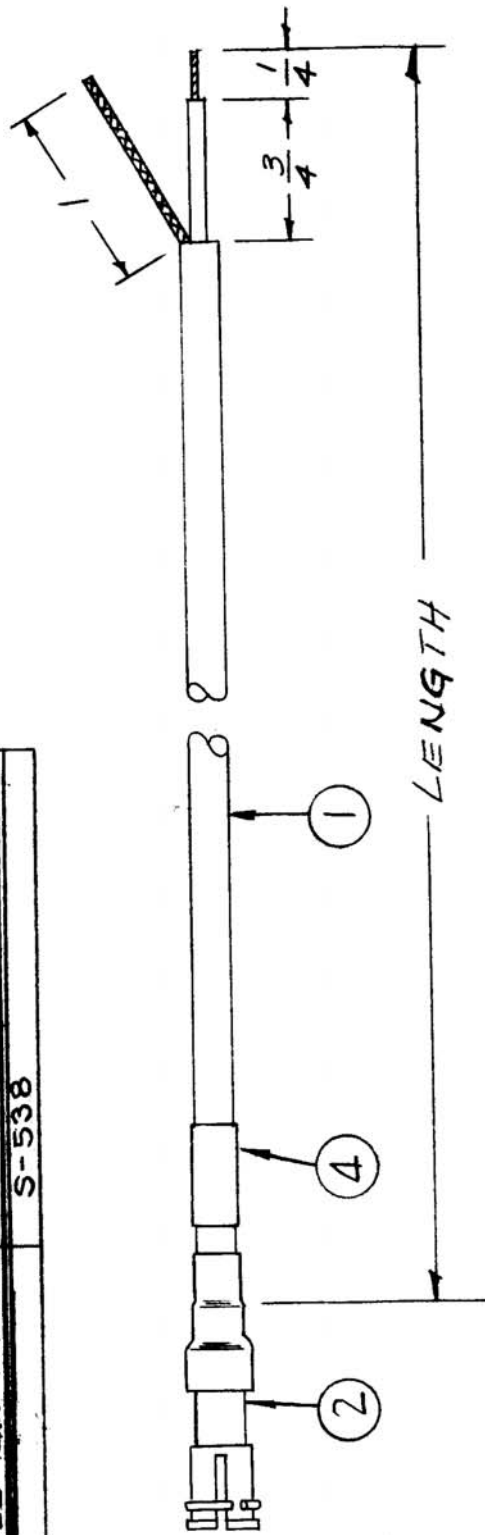

Type Designation to be as Follows:

CA-350-L

TMC NO. LENGTH (inches)  
(See Examples)  
Examples -  
CA-350-5.31 = Cable Assy, 5 5/16" Long  
CA-350-7.00 = " " , 7" Long

Note - See Spec. S-343 for Connector Assy. to Cable.

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
1	4	LA-105-12-	LABEL (See Chart)
X	3	BS-100	Solder, Soft
1	2	PL-154	Connector, Plug, Female
X	1	RG-174/U	Cable, Coax., Min.
STOCK SIZE		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
MATERIAL		CABLE ASS'Y., MIN.	
TYPE & TEMPER		DRAWN <u>RWB</u> CHECKED <u>JAV</u>	
HEAT TREAT. SPEC.		DATE <u>10/21/57</u> FINAL APPROVAL <u>OMP</u>	
FINISH & SPEC. NO.		ELEC. DES. APP. <u>RWB</u> MECH. DES. APP. <u>RWB</u> CA-350 B	

ISSUE ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B	Chart & Item 4 Added	2-2-61	4043	RU	<u>OMP</u>	<u>OMP</u>
A	NOMENCLATURE CLARIFIED	11/21/57	1	16	<u>RWB</u>	<u>RWB</u>

SCALE: 2X

TOLERANCES  
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.  
REMOVE ALL BURRS AND SHARP EDGES

DEC. DIM. ±  
FRAC. DIM. ±  
ANGULAR DIM. ±