REQ. PER UNIT	USED ON			CA-378	A
	MODEL	ASS'Y. NO.	DATE		
1	SWR-3000PM	A-1553	6-5-58		
1	SWR-10KPM		12-11-64		

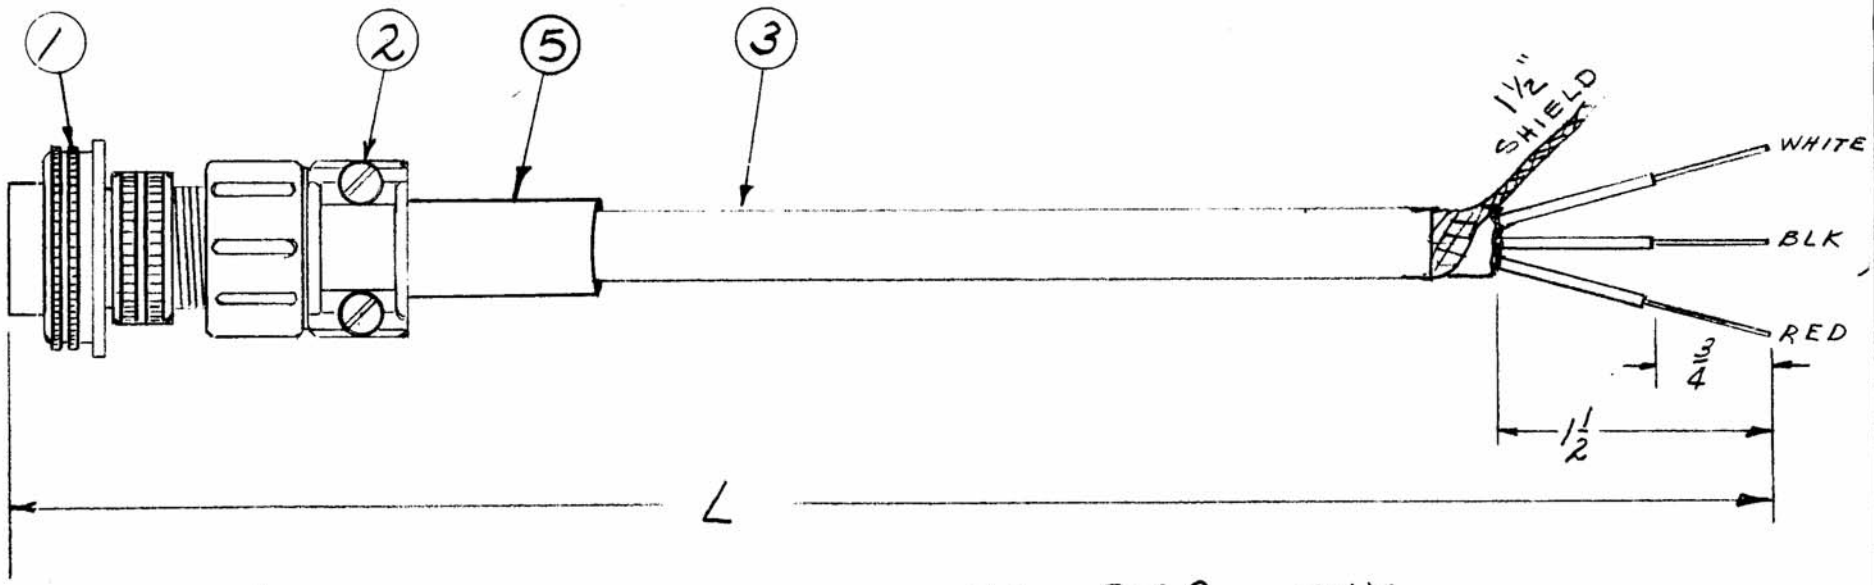

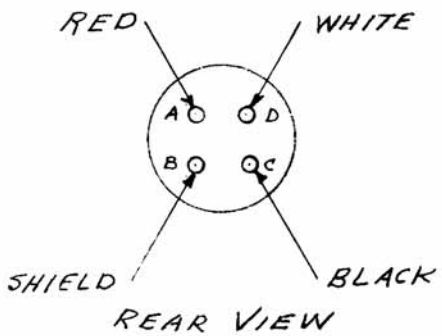

CA-378-XXX

TMC DWG No — LENGTH REQ'D (IN INCHES)

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
1	5	MS3420-6A	BUSH., RUB.	
X	4	BS-100	SOLDER, SOFT	
X	3	WI-130-3-20-XX	CABLE, MULTI-CONDUCTOR SHIELDED	
1	2	MS3057-6	CLAMP, CABLE	
1	1	MS3106A-14S-2P	CONNECTOR, PLUG, MALE	

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	2 1	IT. 5 ADD. TO B/M & PICT. MODEL SWR-10KPM ADD.	1.5.65	13218	bb		

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE:

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

CABLE, ASS'Y. PORTABLE METER

DRAWN | CHECKED | FINAL APPROVAL

ELEC. DES. APP. | MECH. DES. APP.

CA-378 A

FORM 108-A