COLOR CHART	
CODE	COLOR
0	Black
1	Brown
2	Red
3	Orange
4	Yellow
5	Green
6	Blue
7	Violet
8	Grey
9	White

Note - For two Color Wires, Use White (Code 9) as the first Digit, and follow it with any other digit.
EXAMPLES:
92 = White/Red
95 = White/Green

REQ. PER UNIT	USED ON 1ST MODEL	ASS'Y. NO.	DATE	CA-401
	RSC-2 Mod.			

Strip & Tin Both Ends as Shown.

Number As per Part No. Below

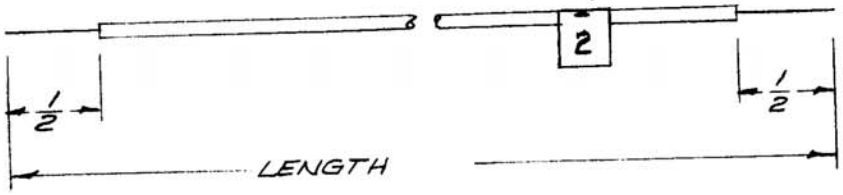

Type Designation to be in the following form:

CA-401 - 2 - 5 - 6.5

TMC DWG NO.	COLOR DESIRED See Chart	MARKER NUMBER OR LETTER DESIRED	LENGTH IN INCHES to the Nearest 1/2 inch.

EXAMPLE: CA-401-6-2-4 = A Cable, Insulated, Color-Blue, with a marker No. 4, and a 4" Total Length, stripped & tinned 1/2" each end

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
X	2	LA-101	Marker, Wire (Use Any Number or Letter as Req.)	
X	1	MWC22(7)U X	Cable, Insulated (Use Any Color As Required)	

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE:

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

CABLE ASS'Y., NO. 22, W/MARKER

DRAWN	CHECKED	FINAL APPROVAL
16 10/22/58		

ELEC. DES. APP.	MECH. DES. APP.	CA-401