


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.
 MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed herein. This drawing is issued in confidence and engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:
 THE TECHNICAL MATERIEL CORPORATION
 MAMARONECK, NEW YORK

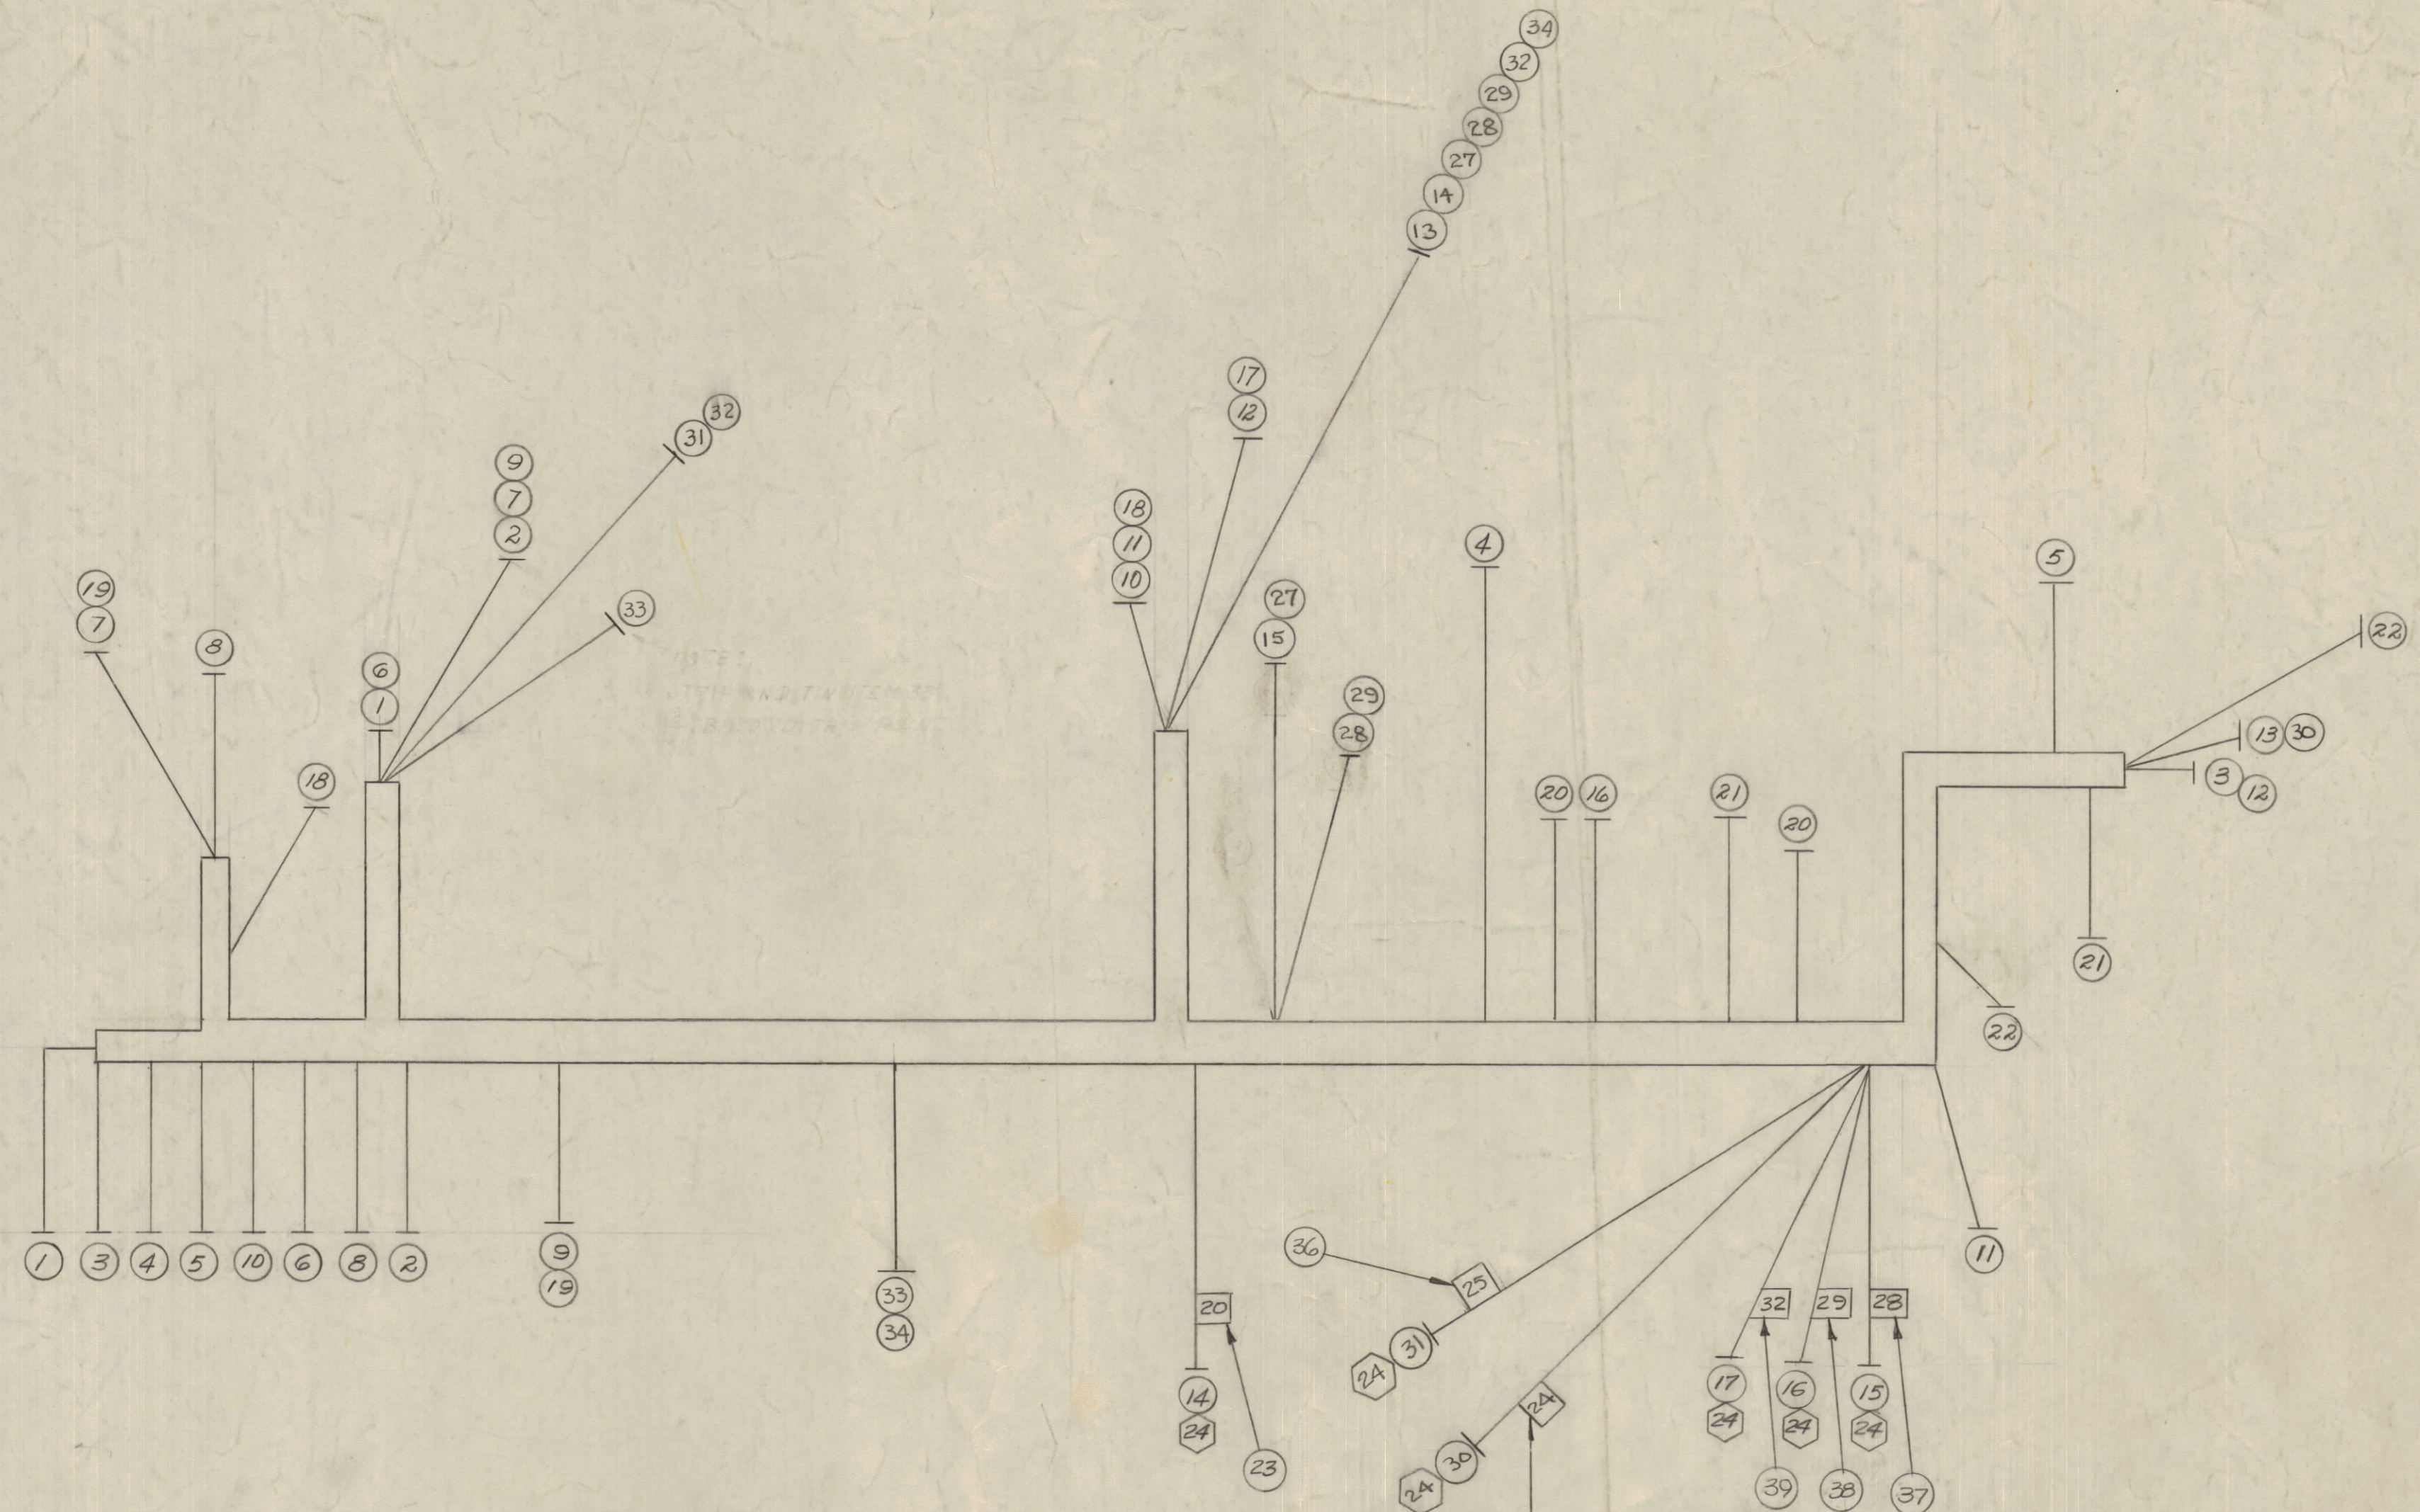

NOTES:
 BOTTOM VIEW OF CABLE SHOWN.
 ○ = Item No.
 ◻ = Terminal Lug - Crimp & Solder

—|— This Symbol Denotes End of Insulation & Nail Driving Point. Wire must be stripped 3/4" beyond this point & tinned 3/8"

Wires should be placed in Cable in Numerical Sequence as they appear in Item column.
 Space Lacing Approx. 3/4" Apart.

REQ. ITEM	PART NO.	FROM	TO	SYMBOL
1	39	LA101-32	MARKER, CABLE	
1	38	-29		
1	37	-28		
1	36	-25		
1	35	LA101-24	MARKER, CABLE	
34	MWC 22(7)U92	CA613	K603	WH/Red
33	MWC 22(7)U92	R625, R626	C613	WH/Red
32	MWC 22(7)U7	R625	K603	Violet
31	MWC 22(7)U2	R626	E603 Term. 25	Red
30	MWC 22(7)U1	R605	E603 Term. 24	Brown
29	MWC 22(7)U5	K602-Pin 6	[A] K603 CL. CONT.	Green
28	MWC 22(7)U2	K602-Pin 8	[A] K603 OPEN CON.	Red
27	MWC 22(7)U93	K602-Pin 4	[A] K603 ARM.	White Org.
X	26	BS-100	Solder, Soft	
X	25	CD-101-1-MW	Cord, Lacing	BLK
6	24	TE-120-2	Terminal, Solderless	
1	23	LA-101-20	Marker, Cable	
22	MWC 22(7)U8	V609, Pin 7	V608, Pin 1	Red
21	3	V610, Pin 7	V609, Pin 1	Orange
20	4	V611, Pin 7	V610, Pin 1	Yellow
19	0	R609	Ground	Black
18	97	R608	R609	White
17	98	E603, Term. 32	R608	White Grey
16	6	V611, Pin 1	E603, Term. 29	Blue
15	93	K602, Pin	E603, Term. 28	White Org.
14	4	E602-20	[B] K603 ARM.	Yellow
13	1	R605	[C] K603 OPEN CON.	Brown
12	91	R606	R605	WH/ Brown
11	93	R606	C612 Standoff	WH/ Change
10	94	E601, Term. 5	R606	WH/ Yellow
9	0	R607	Ground	Black
8	92	E601, Term. 7	R603	WH/ Red
7	96	R603	R604	WH/ Blue
6	97	E601, Term. 6	R604	WH/ Violet
5	9	E601, Term. 4	CR602 (-)	White
4	94	E601, Term. 3	CR601 (+)	WH/ Yellow
3	96	E601, Term. 2	R605	WH/ Blue
2	95	E601, Term. 8	R602	WH/ Green
1	MWC 22(7)U93	E601, Term. 1	R601	WH/ Green

ISSUE ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
E	ITEM 23 WAS LA101-20, ITEM 24 WAS CD-101-1-MW, ITEM 25-29 ADDED	12/26/50	17285	440	[Signature]	[Signature]
D	ON ITEMS (32) TO (34) SYMBOL CONSTRUCTION "U" ADDED	3-25-53	81619		[Signature]	[Signature]
C	ITEM (25) WAS CD-101-1-MW, ITEMS 31, 32, 33, 34 ADDED ON ITEM (24) SYMBOL WAS 2	8-3-61	5378	601	[Signature]	[Signature]
B	ITEM 30 ADDED	1/29/50	718		[Signature]	[Signature]
A	ITEMS 27, 28, 29 ADDED	12/1/50	541		[Signature]	[Signature]

ALL DEC. DIM. ±
 OTHERS FRAC. DIM. ±
 ANGULAR DIM. ±

DRILL, PUNCH, COMMERCIAL STOCK
 SIZES AND MANUFACTURERS
 TOLERANCES ARE NOT INCLUDED.

1	RTP-2	PROJECT NO.	ASSY. NO.	DATE
REQ. PER UNIT	MODEL	PROJECT NO.	ASSY. NO.	DATE
USED ON				

CA-407

L

CA-407 E