


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.
 MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.

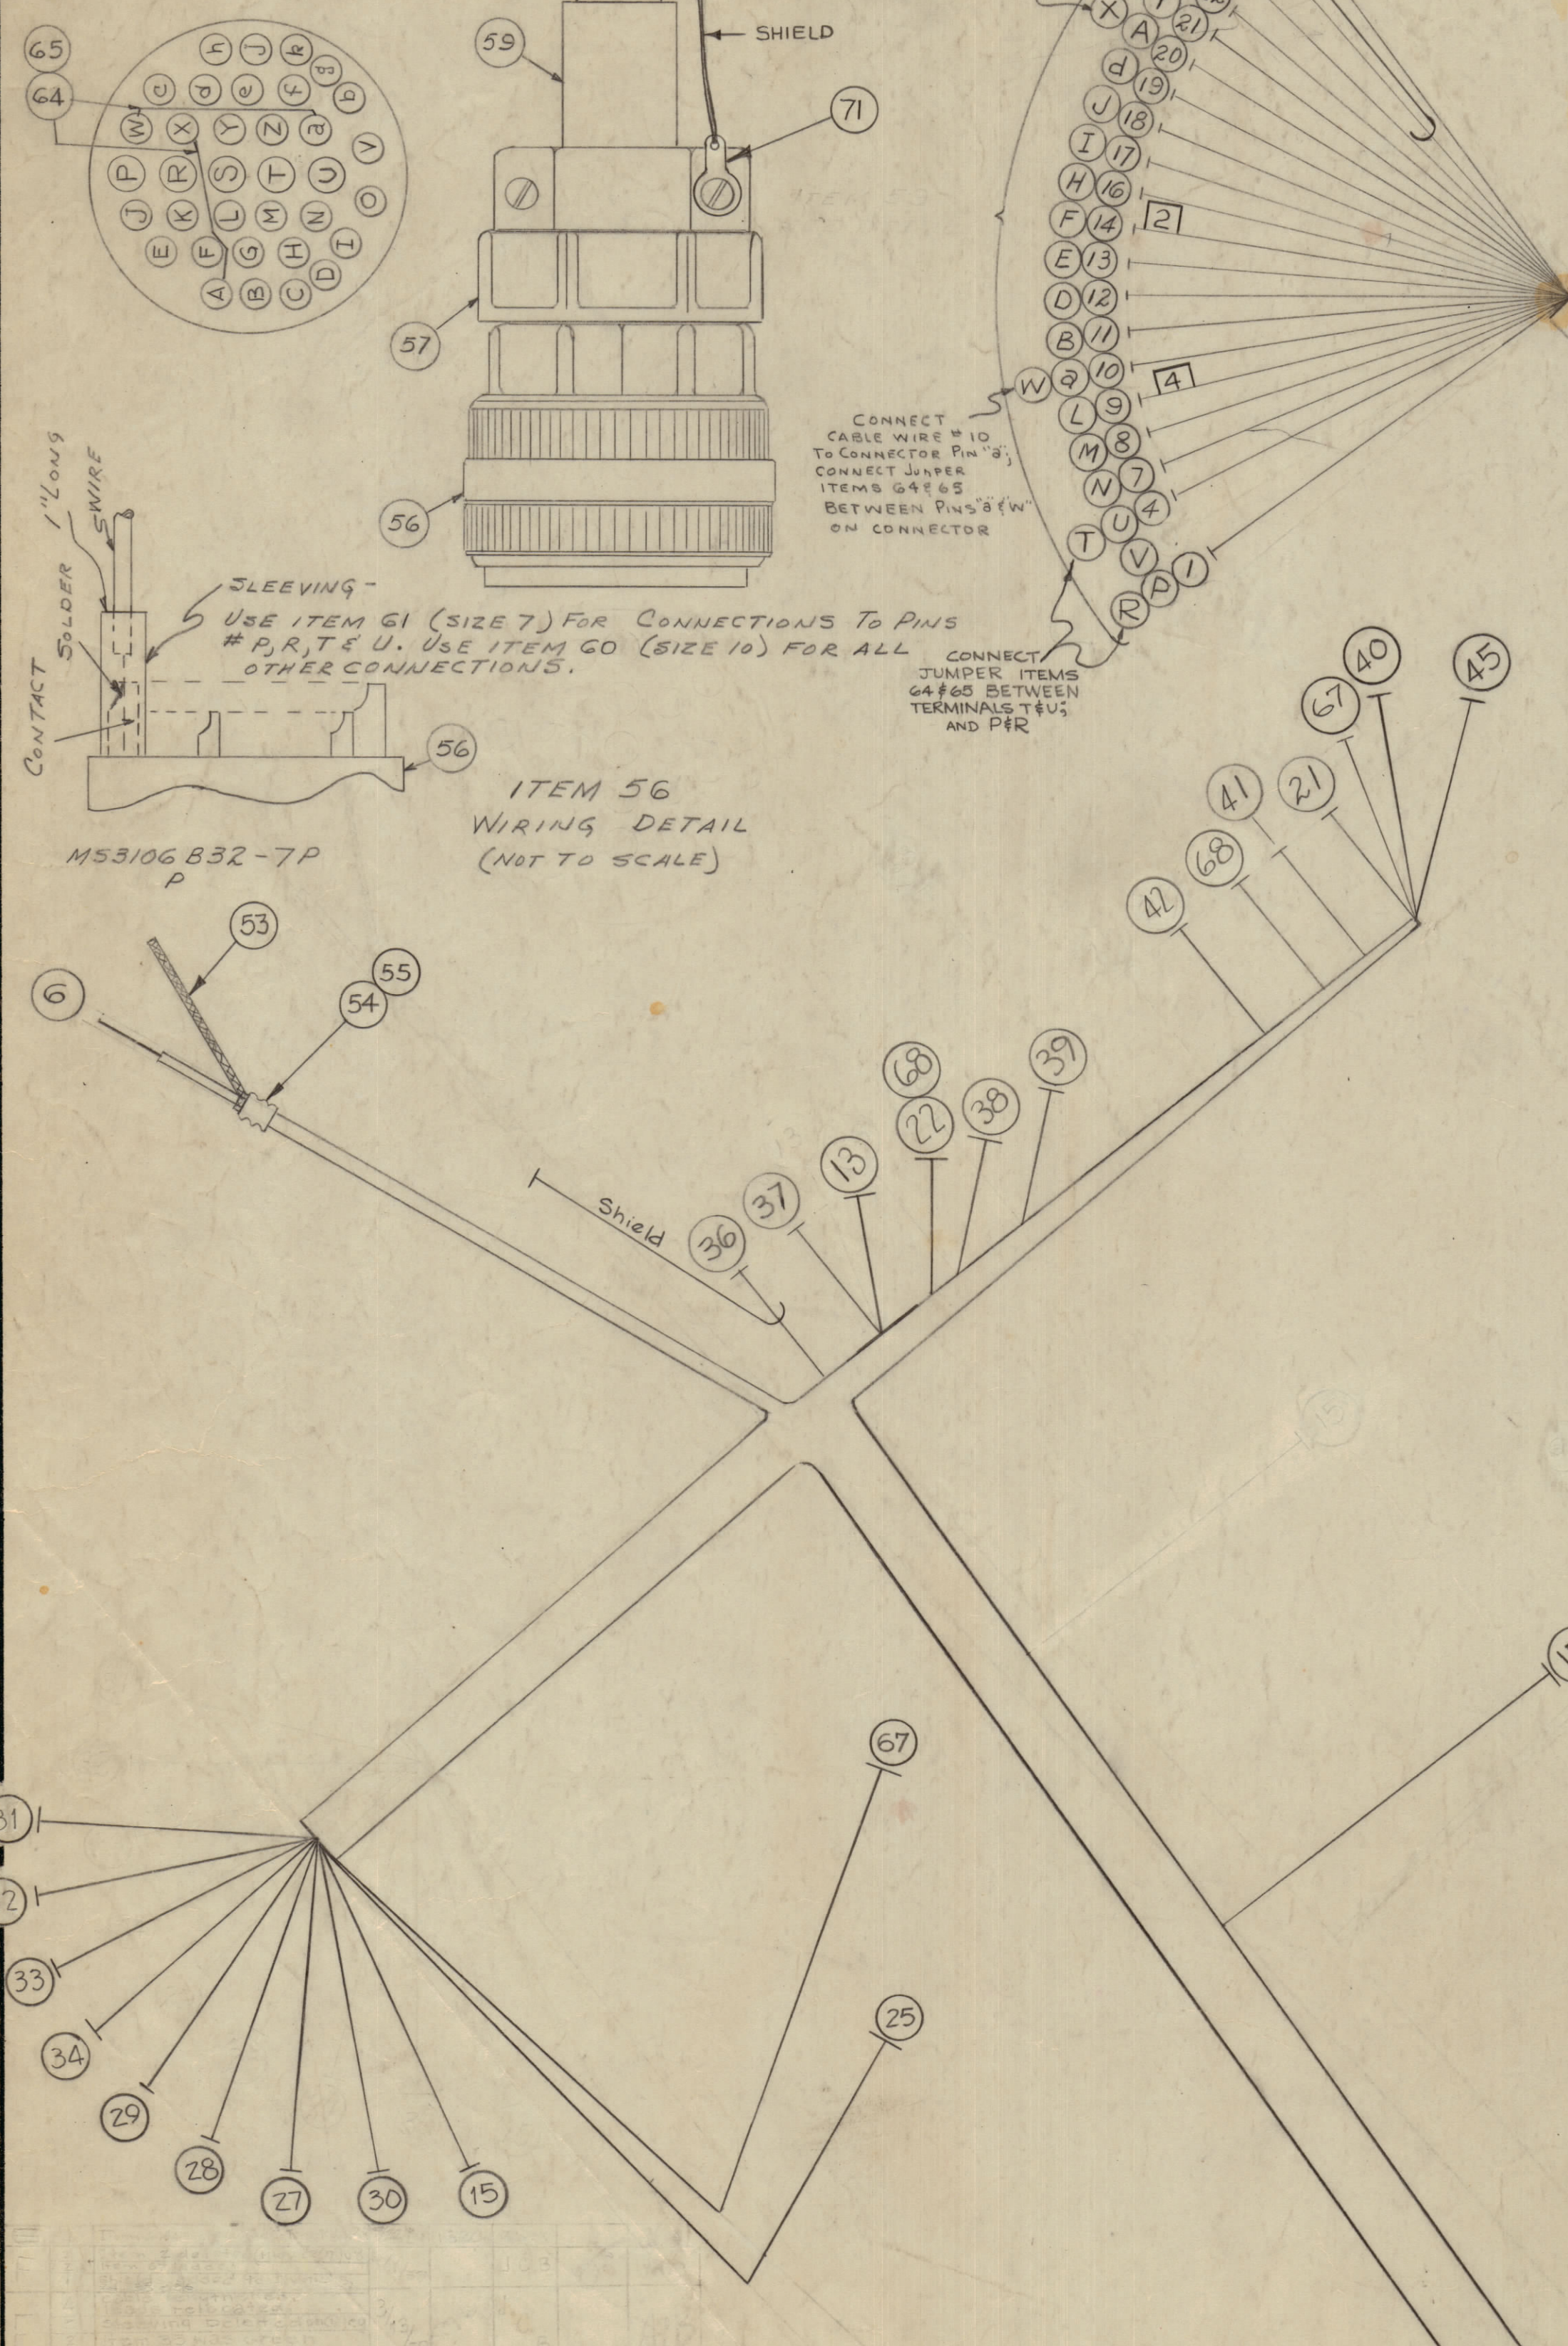


ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
N	4	ADD IT. 53, 54, 55 TO IT. 6 BRANCH ON PICT. IT. 71. ADD. B/M	7.7.64	11686	AB		
	2	CHG. IT. 3, 24, 35, 36 FR. 5 TO 31					
	1	IT. 71. ADD. IT. 52. DELE.					
M	1	ITEM 31 - SYM. PINK W/3 GEN	11/5/63	10318	AR		
L	2	ADDED ITEM (70)	7-25-63	9589	AR		
K	2	ITEMS (15) (42) (22) RELOCATED	11-2-62	7692	AR		
J	2	ITEM (6) (3) (6) (9) ADDED SLEEVING LEADS, HIS ADDED TRIMMED CABLE LENGTHS ADDED	9-4-62	7180	SG		

NOTICE TO PERSONS RECEIVING THIS DRAWING
 THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed herein. This drawing is issued in confidence, or containing information only and may not be re-produced or used to manufacture any item, in whole or in part, without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:
 THE TECHNICAL MATERIEL CORPORATION
 MAMARONECK, NEW YORK

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
1	71	TE-104-5	LUG, SOLDER
4	70	LA-101	MARKER
X	69	CD-101-1-MW	CORD, LACING
5 3/4	68	MWC20(7)U9	CABLE, INSULATED
22	67	MWC20(7)UPink	Cable, Insulated
X	66	BS-100	SOLDER, SOFT
25	65	WL-100-7	WIRE, BUSS BAR, TINNED
5	64	PX-100-1-.022	INSULATION, SLEEVING
3 1/2	63	PX-100-1-.263	INSULATION, SLEEVING
1	62	EY-102-8	GROMMET
10	61	PX-100-1-.148	INSULATION, SLEEVING, SIZE # 7
18	60	PX-100-1-.106	INSULATION, SLEEVING SIZE# 10
1	59	MS3420-16A	BUSHING, CABLE
1	58	MS3420-12A	BUSHING, CABLE
1	57	MS3057-20	CLAMP, CABLE
1	56	MS3106B32-7P	CONNECTOR, PLUG, MALE
2	55	CU-101-10	FERRULE, CABLE, OUTER
2	54	CU-101-9	FERRULE, CABLE, INNER
3	53	WL-103-1	SHIELD, FLEXIBLE
-4	52	DELETED	
21	51	PX-100-1-.625	INSULATION, SLEEVING
26	50	MWC22(7)U 8	CABLE, INSULATED
25 1/2	49	7	
28 1/2	48	94	
18 3/4	47	1	
31 1/2	46	2	
28 3/4	45	4	
27 1/4	44	2	
23 1/4	43	3	
25 1/2	42	98	
29	41	1	
27 3/4	40	7	
21 1/4	39	5	
24 1/2	38	2	
23	37	MWC22(7)U9 2	
20 1/2	36	MWC22(7) SJ3	Shielded
21	35	MWC22(7) SJ(Pink)	Shielded
29 3/4	34	MWC22(7)U 9 2	
28 1/2	33	91	
28	32	9	
28 1/2	31	6	
32	30	4	
29	29	93	
28	28	1	
25 3/4	27	95	
26	26	Pink	
59	25	MWC22(7) U90	
27 1/4	24	MWC22(7) SJ5	Shielded
21	23	MWC 22(7)U Pink	
53	22	MWC20(7)U9	
56	21	MWC20(7)U 0	
32	20	MWC22(7)U98	
26	19	97	
37	18	94	
32	17	3	
34 1/2	16	2	
14 1/2	15	96	
37	14	91	
48 1/2	13	92	
35 1/4	12	4	
20 3/4	11	7	
21	10	1	
37 1/2	9	91	
37 3/4	8	6	
37 1/2	7	MWC22(7)U95	CABLE, INSULATED
39 1/2	6	RG-188/U	CABLE, R.F. COAXIAL
26	5	MWC22(7)U7	CABLE, INSULATED
32 1/4	4	MWC12(19)U0	
23	3	MWC22(7) SJ4	Shielded
X	2	DELETED	
32	1	MWC12(19)U9	CABLE, INSULATED

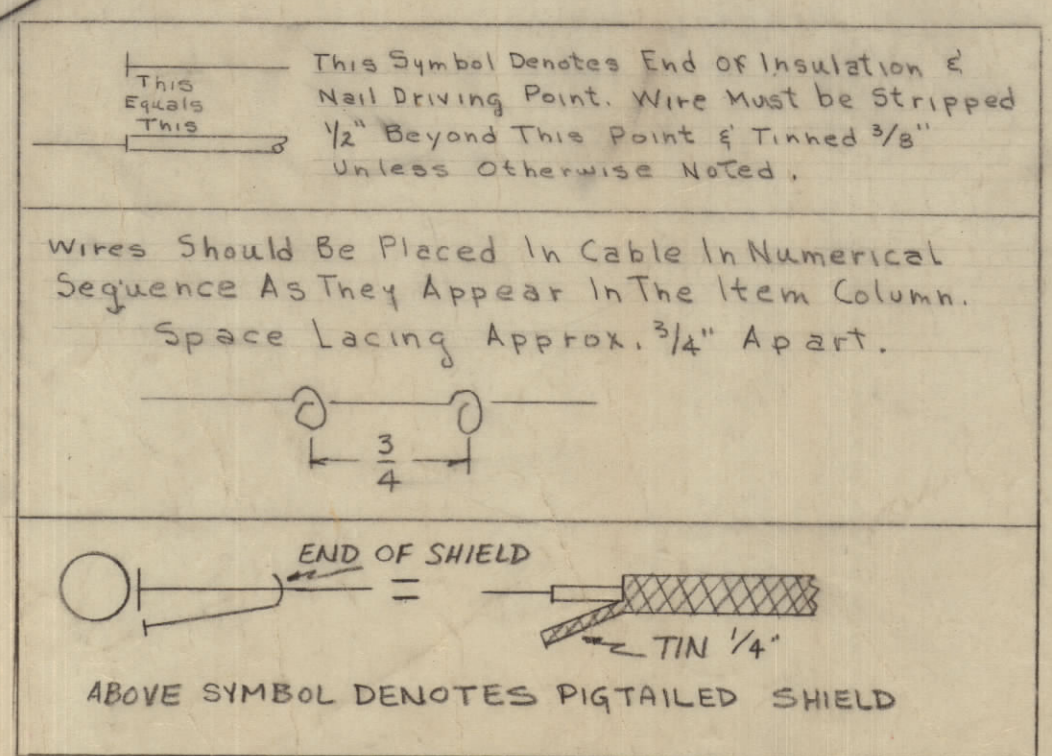

RF-1	RFB-1	11-22-60	2/4/59
REQ. PER UNIT	MODEL	PROJECT NO.	ASSY. NO.
			DATE
			USED ON

STOCK SIZE		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
MATERIAL		CABLE, MAIN, 1PA	
WEIGHT PER FC.			
TYPE & TEMPER		DRAWN: 20 ELEC. DES. APP. 20 MECH. DES. APP. 20	
HEAT TREAT. SPEC.		CHECKED: JMS FINAL APPROVAL: JMS	
FINISH & SPEC. NO.		CA-419	