FOR MARKING INSTRUCTIONS SEE SPEC. LISTED

WHEN USED ON MODEL	SEE SPEC
CHG-1	S-538

REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE		
	CHG-1		12-3-1960	CA-586	A

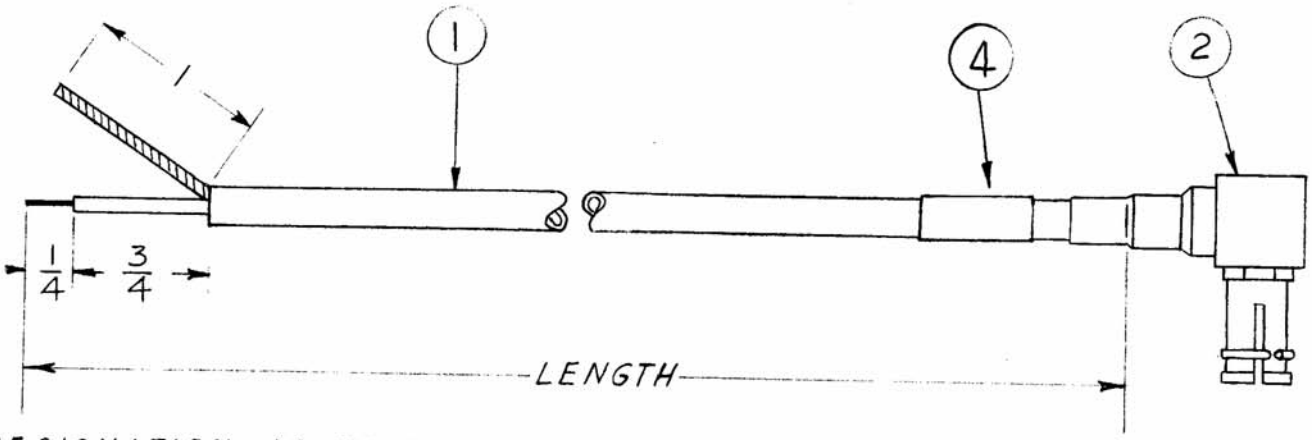

TYPE DESIGNATION AS FOLLOWS:

CA-586 - L

TMC NO. LENGTH (INCHES) (SEE EXAMPLES)

NOTE - SEE SPEC. 343 FOR CONNECTOR ASS'Y. TO CABLE

EXAMPLES -

CA-586-5.31 = CABLE ASS'Y, 5 5/16" LONG
CA-586-7.00 = " " 7" LONG

REQ.	ITEM	PART NO.	DESCRIPTION	YMBOL
1	4	LA-105-12-	LABEL (See Chart)	
X	3	BS-100	SOLDER, SOFT	
1	2	PL-155	CONNECTOR, PLUG, FEMALE, <	50Ω
X	1	RG-174 U	CABLE, COAX-MIN.	

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	1	Chart & Item 4 Added	2-1-61	4043	RU		

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE:

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

CABLE ASS'Y, MIN.

DRAWN | CHECKED | FINAL APPROVAL

ELEC. DES. APP | MECH. DES. APP

CA-586 A

FORM 108-A