



WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN, SPACE LACING APPROX. 3/4" APART.



THIS SYMBOL DENOTES END OF INSULATION & NAIL DRIVING POINT, WIRE MUST BE STRIPPED 1/2" BEYOND THIS POINT & TINNED 3/8" UNLESS OTHERWISE SPECIFIED.

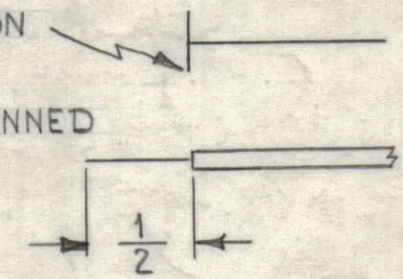

15	PX-100-1-.085	INSULATION, SLEEVING	BLACK
14	PX-100-1-.315	INSULATION, SLEEVING	BLACK
13	BS-100	SOLDER, SOFT	
12	CD-101-1-MW	CORD LACING	BLACK
11	P/O ITEM 8	CABLE, INSULATED	WH/GRN
10	P/O ITEM 8	CABLE, INSULATED	WH/BRN
9	P/O ITEM 8	CABLE, INSULATED	WH/YEL
8	RR-129-2	HEATER, ELEMENT	
7	PL-189-9-P	PLUG, HEX, MINIATURE	
6	MWC 22(7)U2	CABLE, INSULATED	RED
5	MWC 22(7)U92		WH/RED
4	MWC 20(7)U94		WH/YELL
3			BROWN
2			BLACK
1	MWC 20(7)U9	CABLE, INSULATED	WHITE

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed herein. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown herein without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:
THE TECHNICAL MATERIEL CORPORATION
MAMARONECK, NEW YORK

B	COLOR CHG IT. 11 WAS WH/YEL. IT. 9 W/ WH/GRN	8/31/72	20867	GE				
A	B2 ITEM #8 WAS RR129-1	4-15-64	11180	A.M.				
SYM	ZONE	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	
UNLESS OTHERWISE SPECIFIED:			SCALE					
DIMENSIONS ARE IN INCHES			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS & SHARP EDGES					
TOLERANCES ON FRACTIONS ± 1/64			DECIMALS ± .005			ANGLES ± 1/2°		

1	CHG-2	OVEN		4-29-61
REQ. PER UNIT	MODEL	SECTION	ASSY. NO.	DATE
USED ON				

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
CABLE, H.F.O			
DRAWN		CHECKED	FINAL APPROVAL
TYPE & TEMPER		HEAT TREAT. SPEC.	
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.
		SHEET	OF