FOR MARKING INSTRUCTIONS SEE SPEC. LISTED.

REQ. PER UNIT	USED ON MODEL	USED ON ASS'Y. NO.	USED ON DATE
	CHG-2		5-26-61

CA-622

WHEN USED ON MODEL	SEE SPEC.
CHG-2	S-581

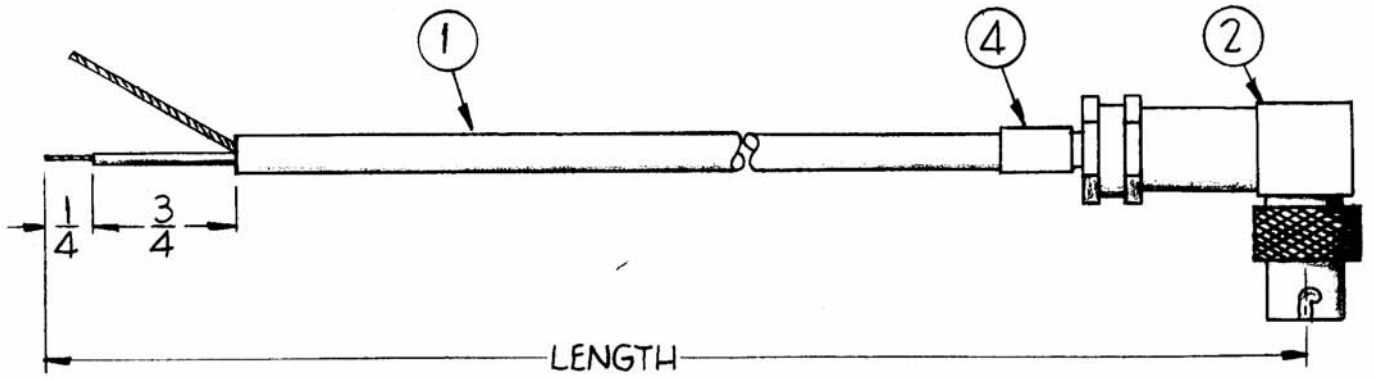

TYPE DESIGNATION AS FOLLOWS:

CA-622 - L

TMC NO. — LENGTH (Inches, See Examples)

NOTE — See Spec. S-345 For Connector Ass'y. To Cable.

EXAMPLES ~

CA-622-5.31 = Cable Ass'y., 5 5/16" Long

CA-622-7.00 = " " 7" "

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
1	4	LA-105-12	Label (See Chart)	
X	3	BS-100	Solder, Soft	
1	2	PL-205	Connector, Plug, Female, <	
X	1	RG-174/U	Cable, Coax.-Min.	

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE:

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

CABLE ASS'Y MIN.

DRAWN	CHECKED	FINAL APPROVAL
D. Dorman 6		
ELEC. DES. APP	MECH. DES. APP	CA-622

FORM 108-A