


CA-626 B

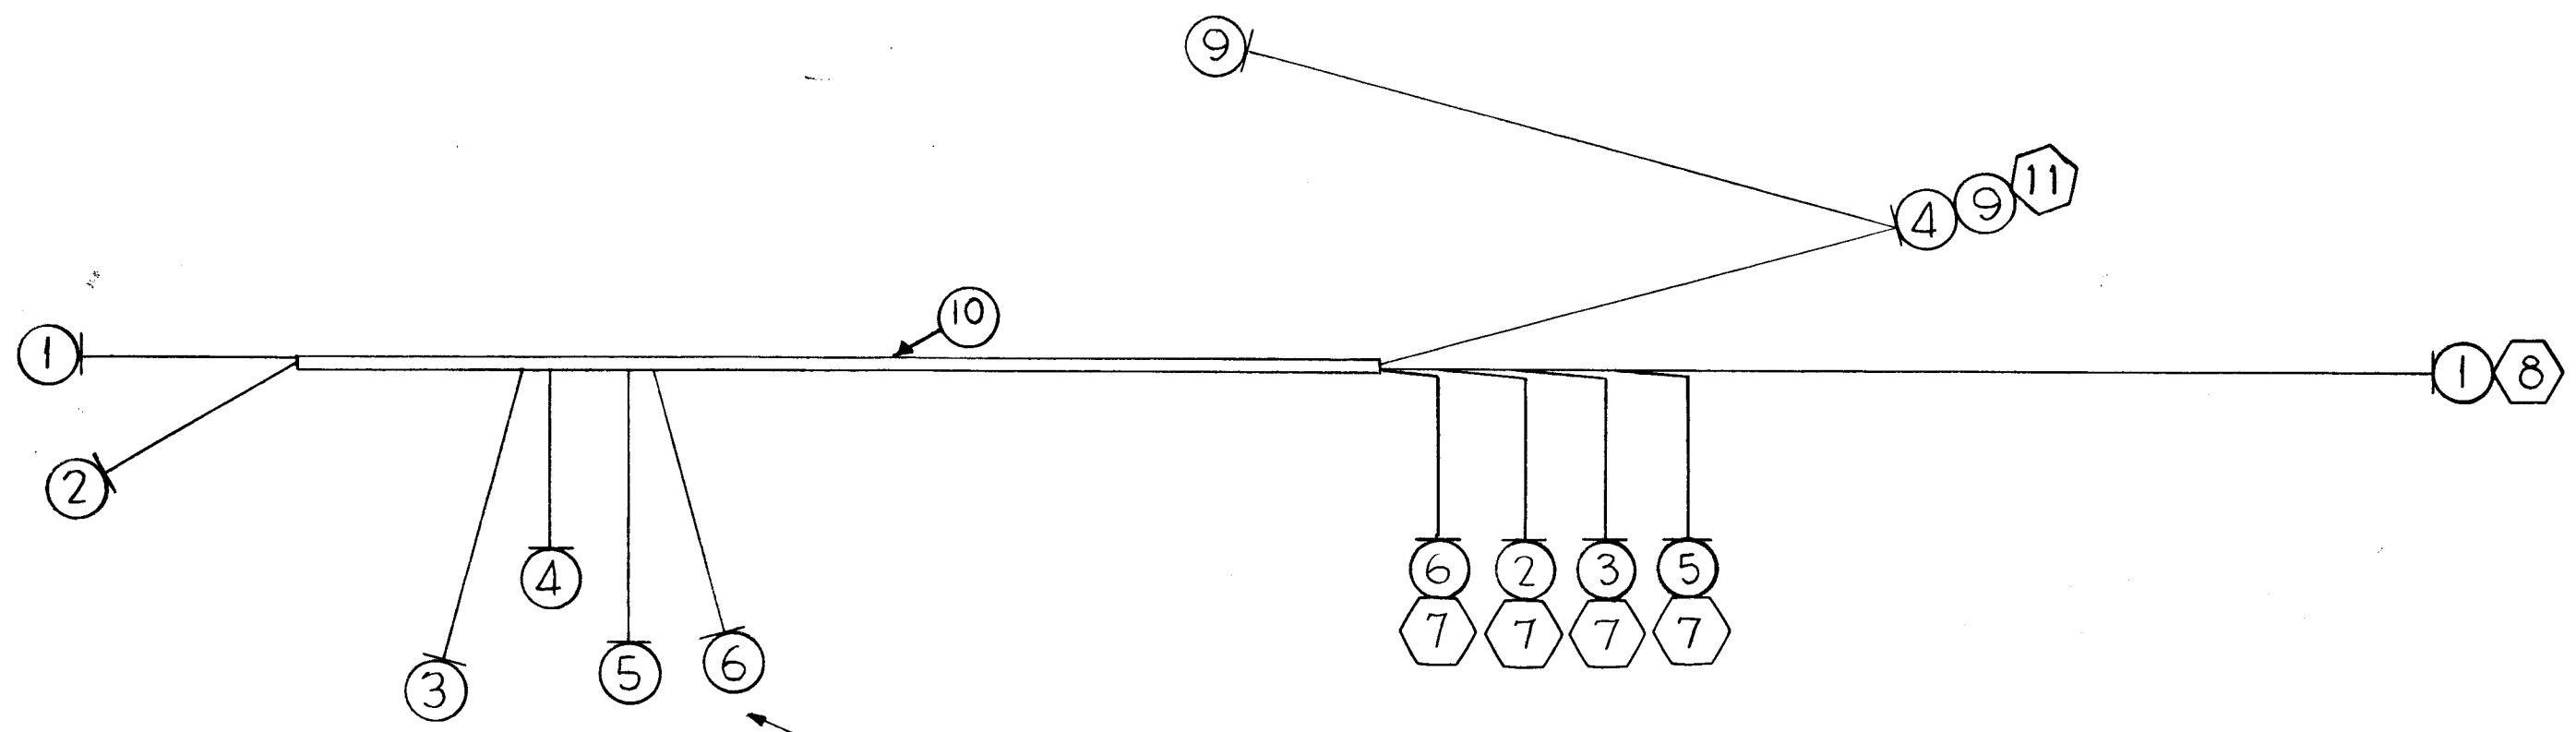

NOTES - ① TIN LEADS ON THIS END
 ② STRIP INSULATION BACK 1/2" ON ITEM 3 AND TIN.

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:
 THE TECHNICAL MATERIEL CORPORATION
 10 MANHATTAN BLVD. NEW YORK

X	12	BS100	SOLDER, SOFT	
1	11	TE159-32960	TERMINAL, LUG, INSULATED	
	10	CD-101-I-MW	CORD, LACING	BLK
3"	9	MWC22(7)U4	Cable, Insulated	Yellow
1	8	TE-156-32949	TERMINAL, LUG, INSULATED	
4	7	TE-120-2	Lug, Crimp Type	
7"	6	MWC22(7)U93	Cable, Insulated	Wh/ORN
8 1/4"	5		95	Wh/GRN
8 3/4"	4		4	Yellow
8 1/2"	3		9	White
9"	2		97	Wh/Viol
13 1/4"	1	MWC22(7)U5	Cable, Insulated	Green

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
CABLE, CONNECTING, POTENTIOMETER ASS'Y.				
TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKER
			RK	Ron Kohn
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	
				CA-626 B

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B	ADD IT 11. IT B WAS 2 REQ	12.19.66	17519	RME	RB	RK
A	ITEM ⑩ ADDED	9/5/61	5530	RB	RB	RK

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES
 TOLERANCES ON FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 1/2°

SCALE: FULL
 MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
 REMOVE ALL BURRS AND SHARP EDGES

PS-4A	PAL-1K	6-7-61
REQ. PER UNIT	MODEL	SECTION
		ASS'Y. NO.
		DATE
USED ON		