


NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:
THE TECHNICAL MATERIEL CORPORATION
MAMARONECK, NEW YORK

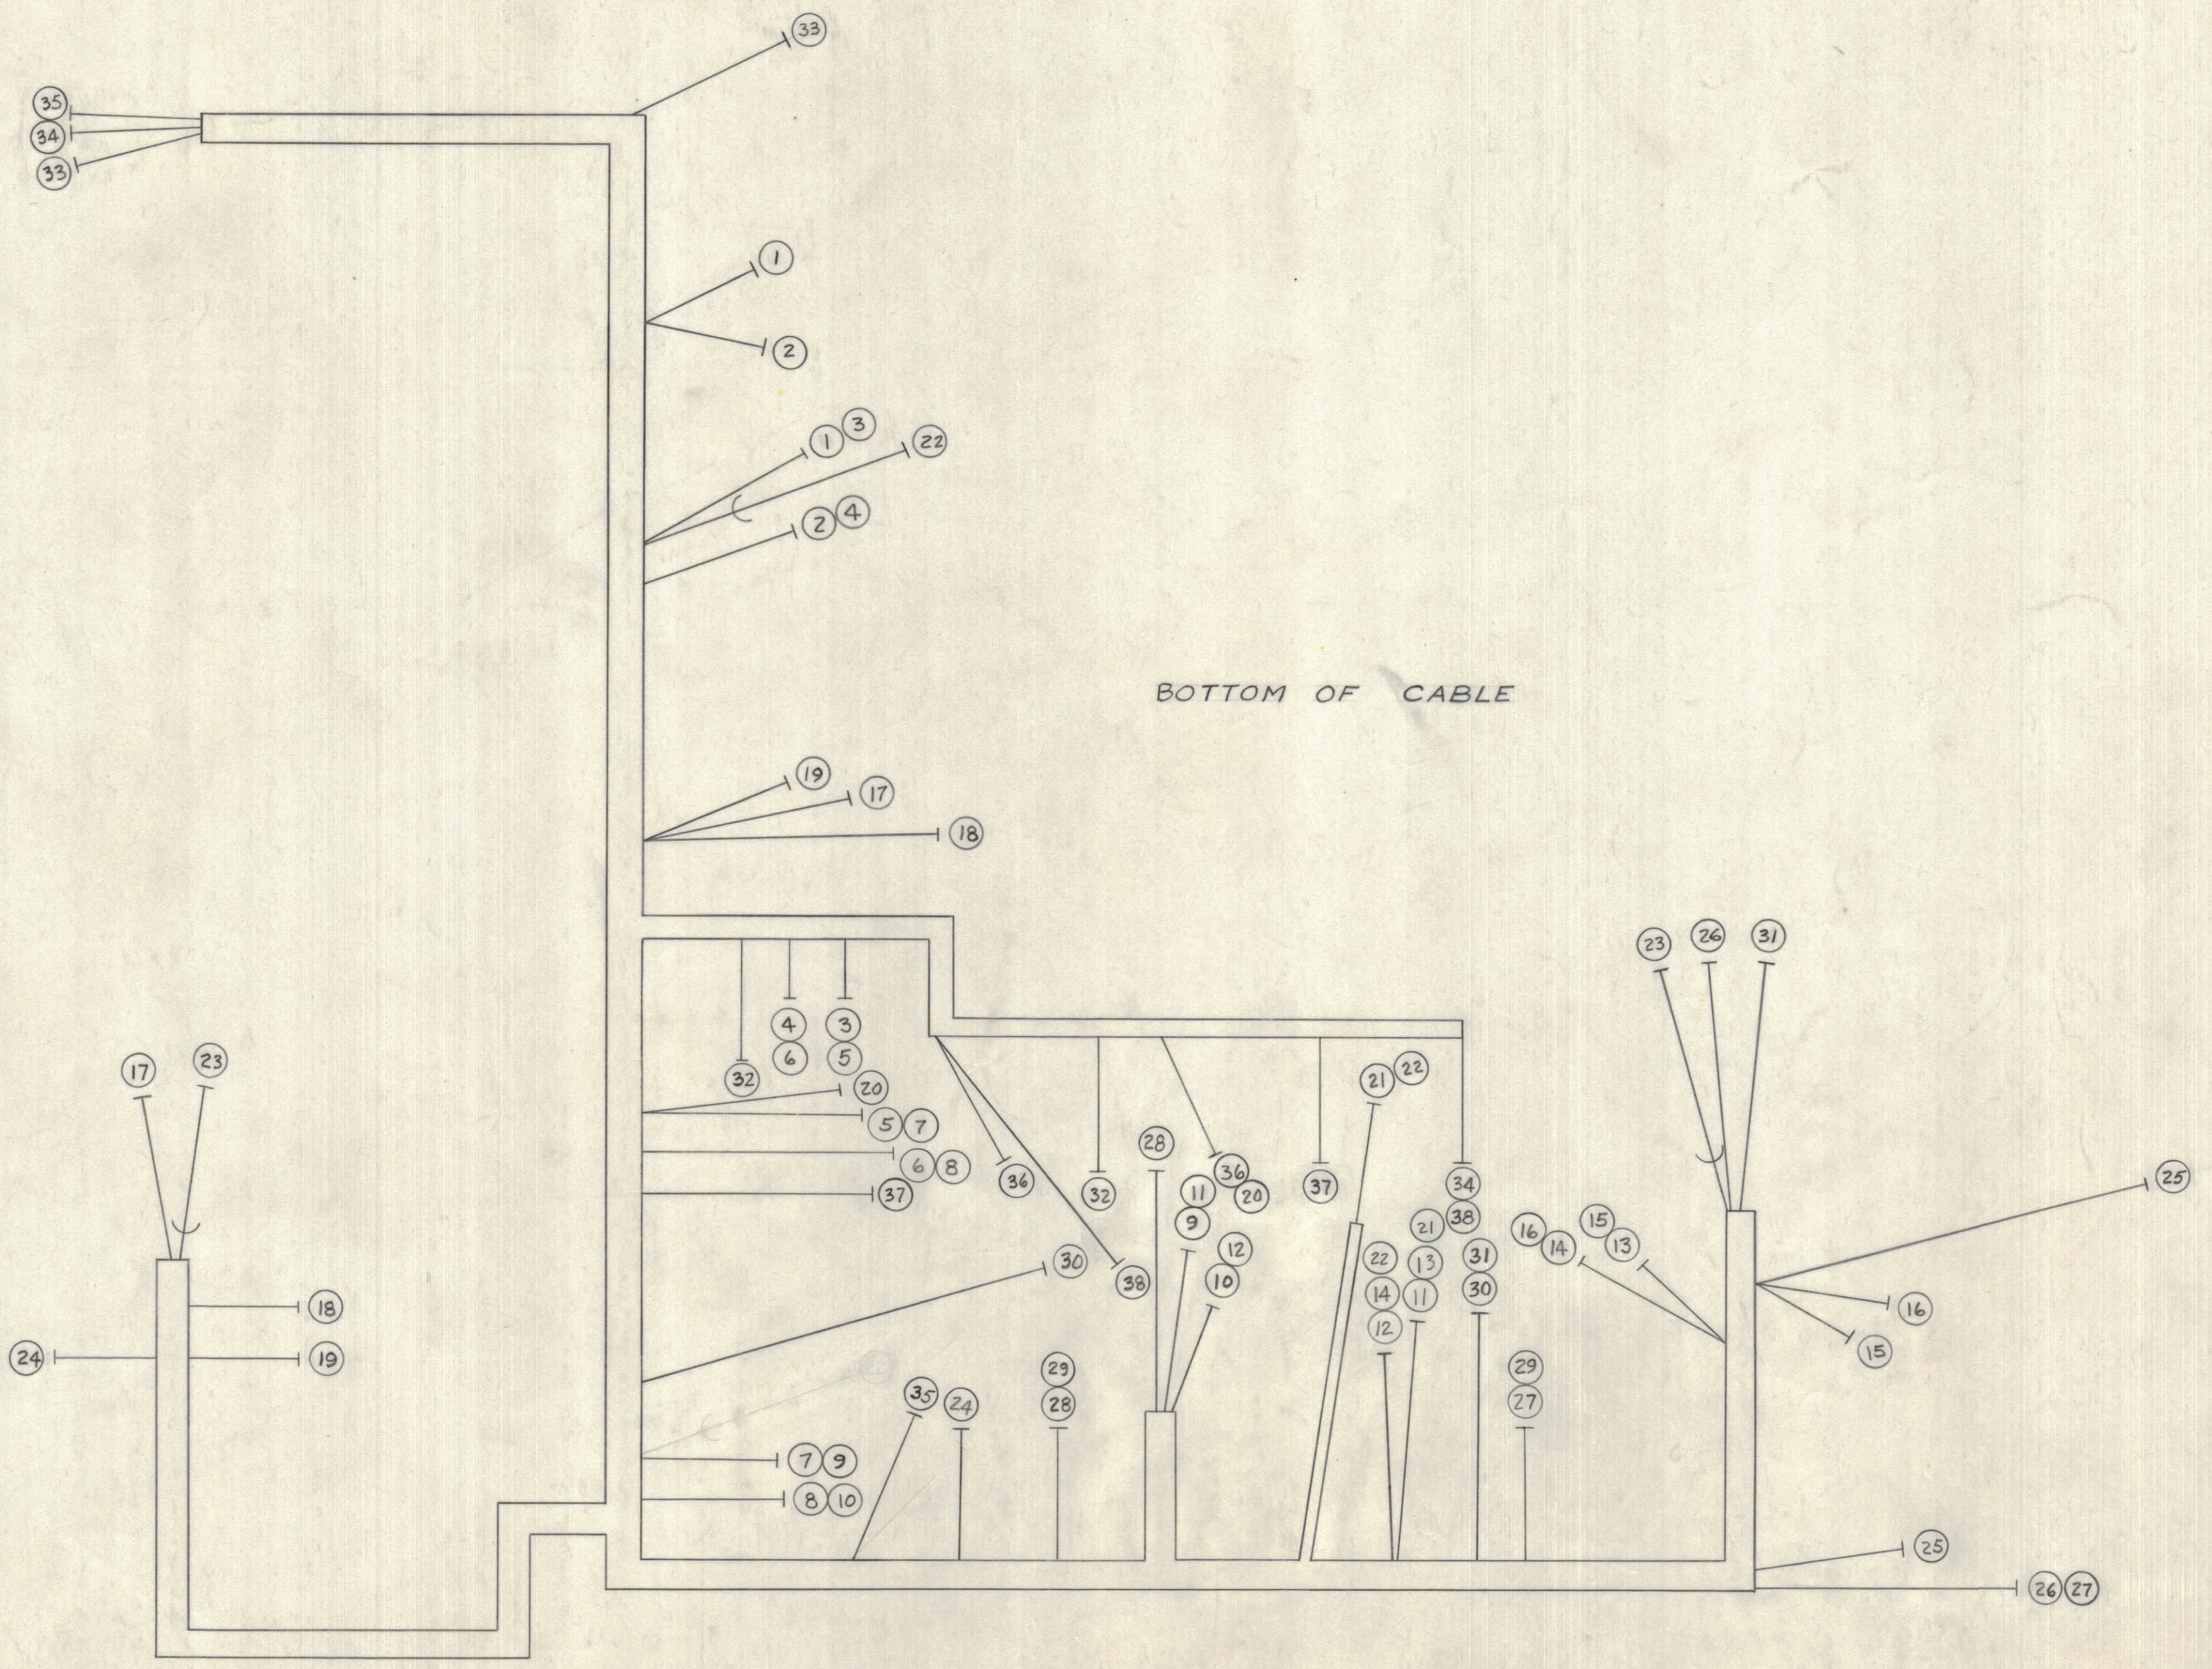

ALL WIRE LENGTHS ALLOW 1/2 EACH END FOR STRIPPING

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
X 40	BS-100	SOLDER, SOFT	
4'	39	CD-101-1-MW	CORD LACING, NYLON
8"	38	MWC-22(7)U-5	CABLE, INSULATED GREEN
12"	37	MWC-22(7)U-6	CABLE, INSULATED BLUE
4"	36	MWC-22(7)U-92	CABLE, INSULATED WH/RED
20"	35	MWC-22(7)U-94	CABLE, INSULATED WH/YEL
20"	34	MWC-22(7)U-4	CABLE, INSULATED YELLOW
6 1/2"	33	MWC-22(7)U-0	CABLE, INSULATED BLACK
6 3/4"	32	MWC-22(7)U-5	CABLE, INSULATED GREEN
10 3/8"	31	MWC-22(7)U-PINK	CABLE, INSULATED PINK
15 3/8"	30	MWC-22(7)U-PINK	CABLE, INSULATED PINK
7 1/8"	29	MWC-22(7)U-2	CABLE, INSULATED RED
6 3/8"	28	MWC-22(7)U-2	CABLE, INSULATED RED
6 3/8"	27	MWC-22(7)U-2	CABLE, INSULATED RED
8 3/8"	26	MWC-22(7)U-2	CABLE, INSULATED RED
8 1/4"	25	MWC-22(7)U-9	CABLE, INSULATED WHITE
12 1/2"	24	MWC-22(7)U-7	CABLE, INSULATED VIOLET
25"	23	MWC-22(7)U-39	CABLE, INSULATED, SHIELDED WHITE
7"	22	MWC-22(7)U-91	CABLE, INSULATED WH/BRN
7"	21	MWC-22(7)U-1	CABLE, INSULATED BROWN
10 1/4"	20	MWC-22(7)U-6	CABLE, INSULATED BLUE
15 1/4"	19	MWC-22(7)U-6	CABLE, INSULATED BLUE
16 1/8"	18	MWC-22(7)U-9	CABLE, INSULATED WHITE
17 1/4"	17	MWC-22(7)U-5	CABLE, INSULATED GREEN
4 3/8"	16	MWC-22(7)U-91	CABLE, INSULATED WH/BRN
3 1/8"	15	MWC-22(7)U-1	CABLE, INSULATED BROWN
9"	14	MWC-22(7)U-91	CABLE, INSULATED WH/BRN
8 3/8"	13	MWC-22(7)U-1	CABLE, INSULATED BROWN
6 3/8"	12	MWC-22(7)U-91	CABLE, INSULATED WH/BRN
7 1/2"	11	MWC-22(7)U-1	CABLE, INSULATED BROWN
9 3/8"	10	MWC-22(7)U-91	CABLE, INSULATED WH/BRN
10"	9	MWC-22(7)U-1	CABLE, INSULATED BROWN
7 1/2"	8	MWC-22(7)U-91	CABLE, INSULATED WH/BRN
7"	7	MWC-22(7)U-1	CABLE, INSULATED BROWN
7"	6	MWC-22(7)U-91	CABLE, INSULATED WH/BRN
6 3/4"	5	MWC-22(7)U-1	CABLE, INSULATED BROWN
7 1/4"	4	MWC-22(7)U-91	CABLE, INSULATED WH/BRN
8 1/4"	3	MWC-22(7)U-1	CABLE, INSULATED BROWN
5 3/4"	2	MWC-22(7)U-91	CABLE, INSULATED WH/BRN
5 1/2"	1	MWC-22(7)U-1	CABLE, INSULATED BROWN

SYM	ZONE	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	C2	ITEM (25) WAS WI-101-4	2-25-63	P296			

UNLESS OTHERWISE SPECIFIED: SCALE: MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS & SHARP EDGES

DIMENSIONS ARE IN INCHES
TOLERANCES ON FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 1/2°

REQ. PER UNIT	MODEL	SECTION	ASSY. NO.	DATE	TYPE & TEMPER	HEAT TREAT. SPEC.	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	SHEET	OF
1	FFR-3S			7-31-61						CA-636	A