

NOTICE TO PERSONS RECEIVING THIS DRAWING


THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be re-produced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:
THE TECHNICAL MATERIEL CORPORATION
MAMARONECK, NEW YORK

SYMBOL NOTES:


- DENOTES SYMBOL N^oS.
- △ DENOTES PIN N^oS.

THIS SYMBOL DENOTES END OF INSULATION & NAIL DRIVING POINT WIRE MUST BE STRIPED 1/2" BEYOND THIS POINT & TINNED 3/8" UNLESS OTHERWISE SPECIFIED.

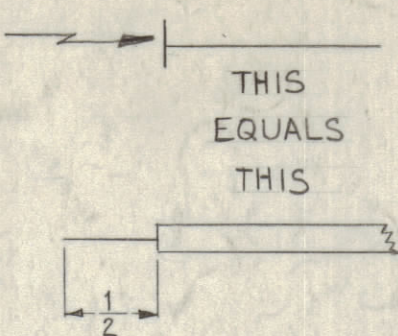


THIS EQUALS THIS

WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN, SPACE LACING APPROX. 3/4" APART.



NOTE:
ALL SOLDERING OF CONNECTORS TO BE DONE WHEN CABLE IS ASSEMBLED IN UNIT.

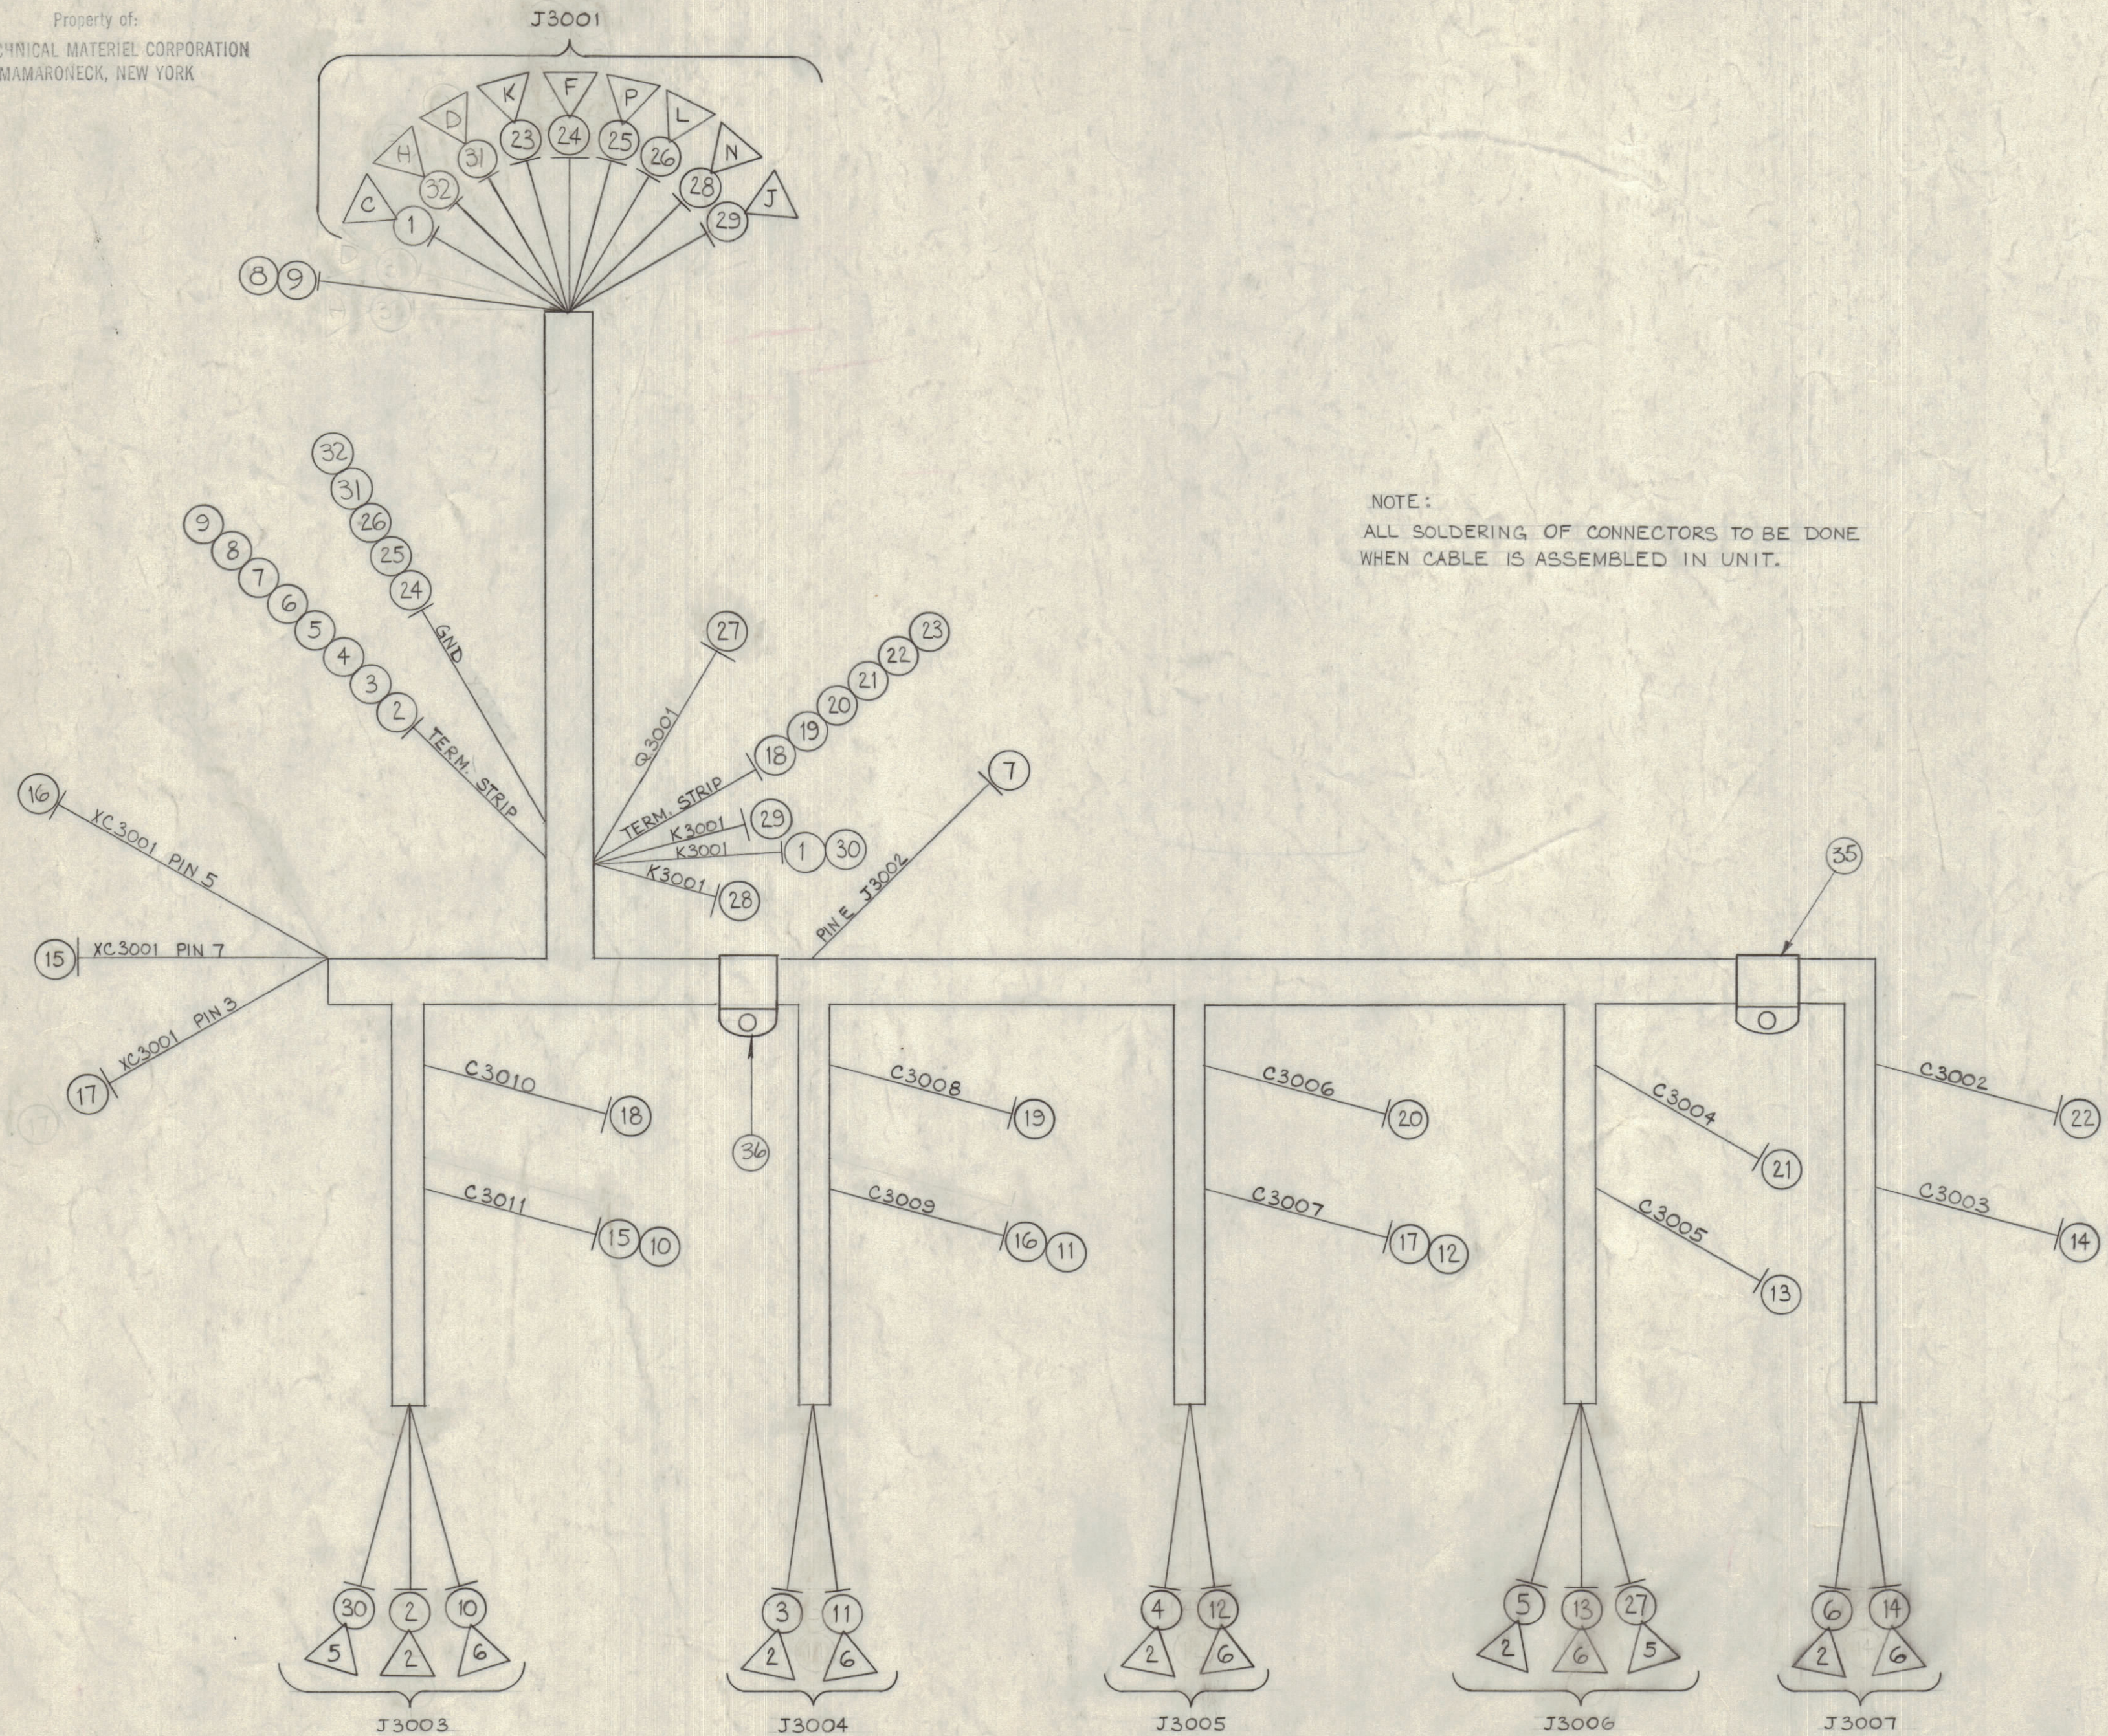

CA-652

REQ. ITEM	PART NO.	J. STRUMER	DESCRIPTION	SYMBOL
1	36	CU-102-3	CLAMP, "G" TYPE	
1	35	CU-102-1	CLAMP, "G" TYPE	
X	34	BS-100	SOLDER SOFT	
X	33	CD-101-1-MW	CORD LACING	
8 3/4"	32	MWC 18(16) U0	WIRE, ELECTRICAL	BLACK
8 3/4"	31	MWC 18(16) U0		BLACK
9 5/8"	30	MWC 22 (7) U3		ORANGE
8 1/4"	29	U9		WHITE
8 1/2"	28	U6		BLUE
17"	27	MWC 22(7) U5		GREEN
8 3/4"	26	MWC 18(16) U0		BLACK
8 3/4"	25	MWC 18(16) U0		BLACK
8 3/4"	24	MWC 18(16) U0		BLACK
8 1/2"	23	MWC 22(7) U92		WH/RED
16"	22	U92		WH/RED
13 3/4"	21	U92		WH/RED
11"	20	U92		WH/RED
7 3/4"	19	U92		WH/RED
7 1/2"	18	U92		WH/RED
13 1/4"	17	U2		RED
10 1/4"	16	U2		RED
7 1/2"	15	U2		RED
6"	14	U2		RED
6"	13	U2		RED
6"	12	U2		RED
6"	11	U2		RED
6"	10	MWC 22 (7) U2		RED
9"	9	MWC 14 (19) U1		BROWN
9"	8	MWC 14 (19) U1		BROWN
7 1/2"	7	MWC 20 (7) U1		BROWN
19"	6	U1		BROWN
16 3/4"	5	U1		BROWN
13 1/2"	4	U1		BROWN
10 1/2"	3	U1		BROWN
9 3/4"	2	MWC 20 (7) U1		BROWN
8 1/2"	1	MWC 22 (7) U3	WIRE, ELECTRICAL	ORANGE

BYM	ZONE	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B	D2	ITEM (35) & (36) ADDED	12-1-62	7849			
A	D2	ITEM (31) WAS MWC 18(16) U0; ITEM (32) WAS MWC 18(16) U0	11-13-62	7654			
	D2	ITEM (33) WAS CD-101-MW; ITEM (32) WAS MWC 18(16) U0					

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES ON FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 1/2°

SCALE
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS & SHARP EDGES

REQ. PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE	TYPE & TEMPER	HEAT TREAT. SPEC.	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	SHEET	OF
1	HFS-1	3000		8-15-62						CA-652	B