




THIS SYMBOL DENOTES END OF INSULATION & NAIL DRIVING POINT. WIRE MUST BE STRIPPED 1/2" BEYOND THIS POINT & TINNED 3/8", UNLESS OTHERWISE SPECIFIED





WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN. SPACE LACING APPROX 3/4" APART



END OF SHIELD



ABOVE SYMBOL DENOTES END OF SHIELD

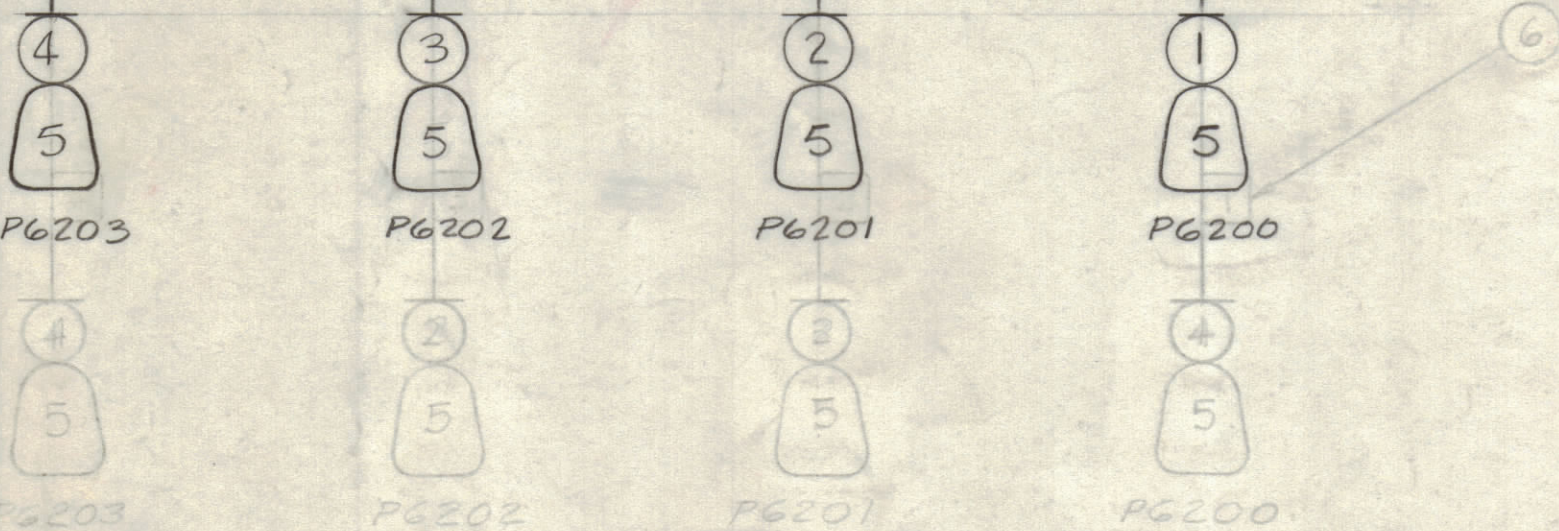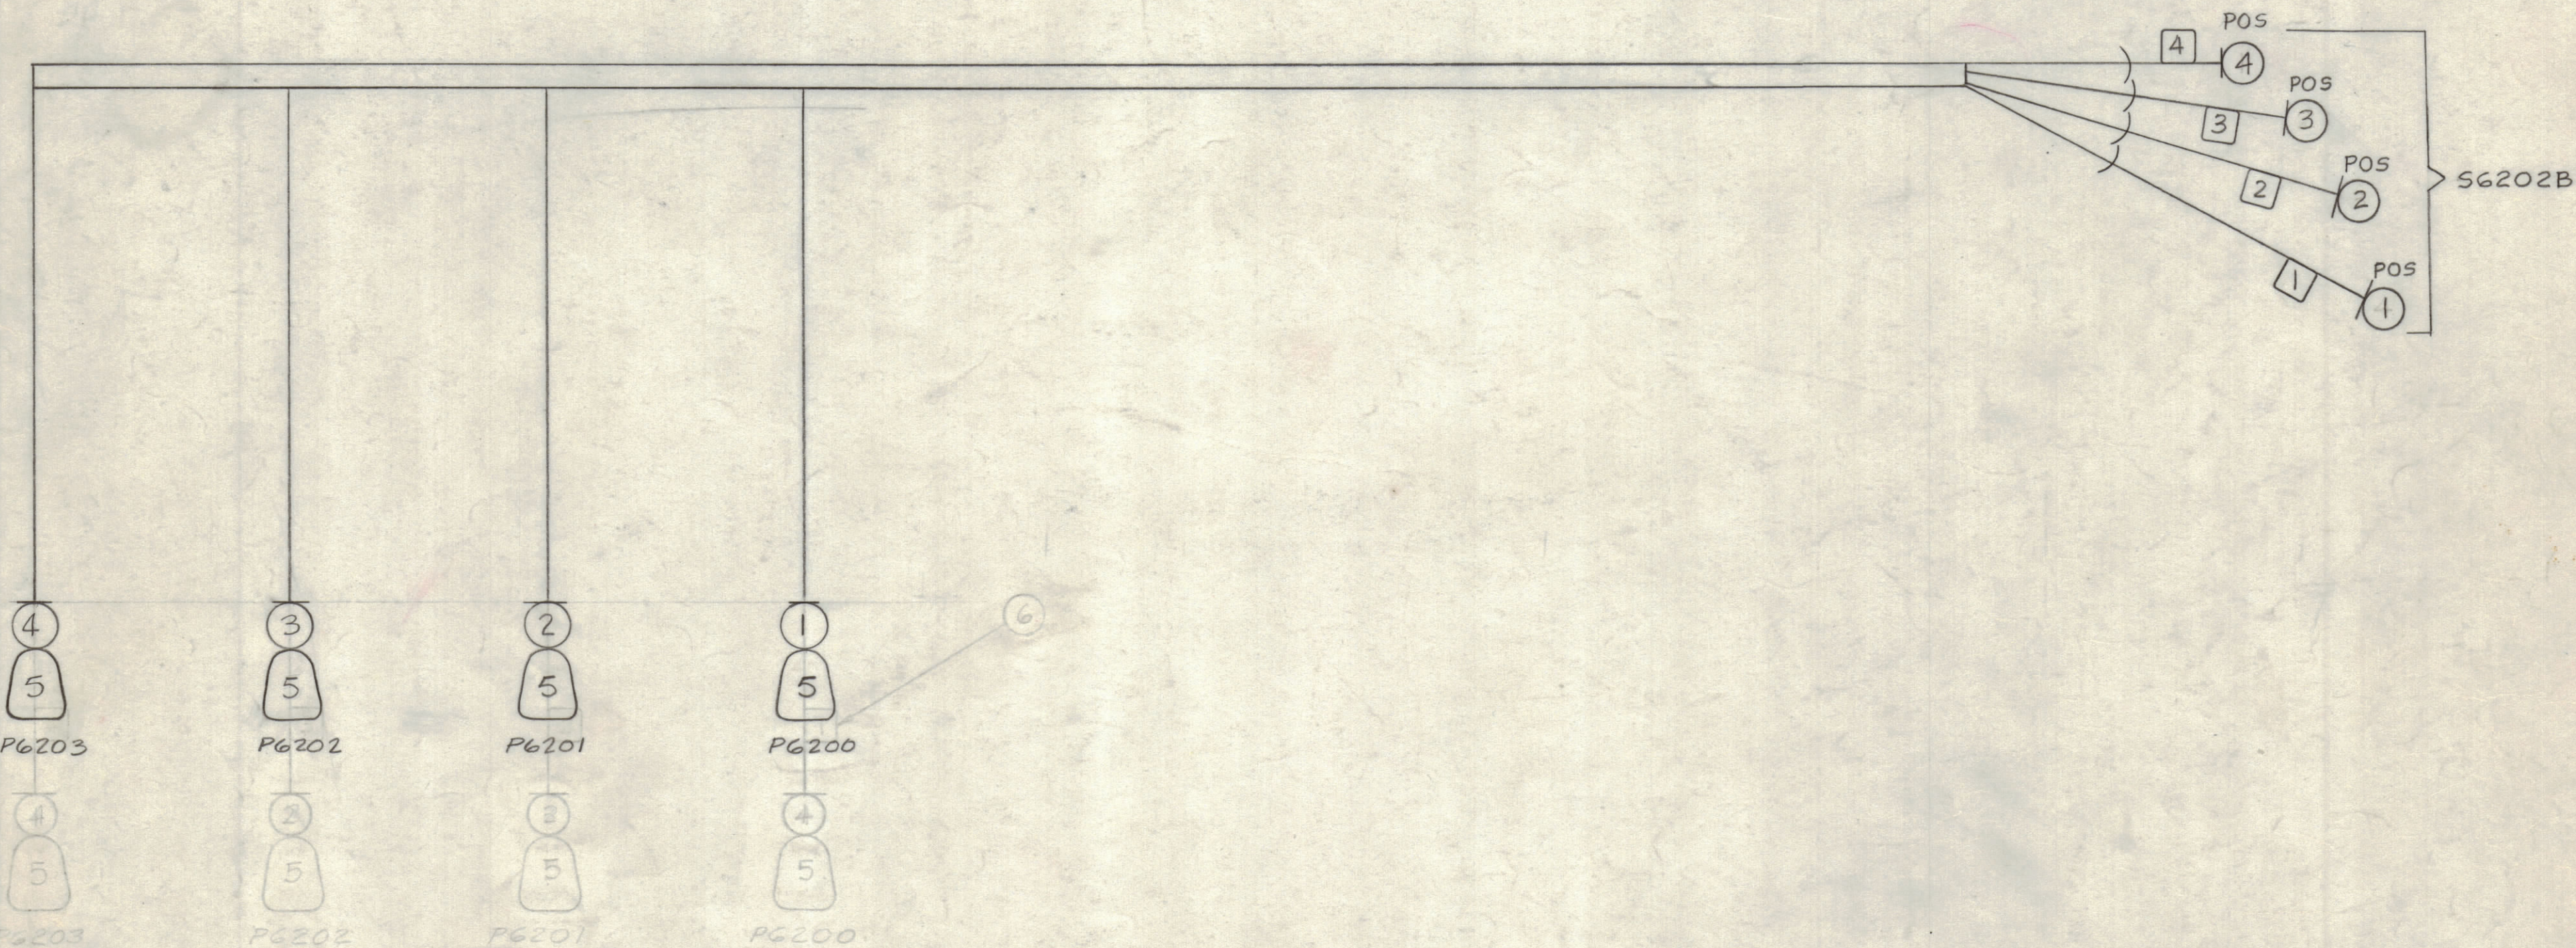

PLUG, MINIATURE - ITEM 5

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:

THE TECHNICAL MATERIEL CORPORATION
MAMARONECK, NEW YORK

1 2 3 4

X	8	CD-101-1-MW	CORD, LACING	BLACK
X	7	BS-100	SOLDER, SOFT	
	4	LA-101	MARKER, WIRE	
	4	PL-204	PLUG, MINIATURE	
	21"	4	RG-174/U	WIRE, COAX
	19 1/2"	3		
	18"	2		
	16 1/2"	1	RG-174/U	WIRE, COAX

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
CABLE ASSY, POWER, ELECTRICAL BRANCHED, IF INTERCONNECT			
MATERIAL		ab	RUZZO
TYPE & TEMPER		HEAT TREAT. SPEC.	DATE
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.
		SHEET	OF

B	B3	ITEMS (1) TO (4) LENGTHS & PICTORIAL CLARIFIED	2-15-63	8261			
A	B2	LENGTHS ADDED TO ITEM (1) THRU (4)	12-18-62	7871			
	B2	ITEM (5) WAS CD-101-MW					
SYM	ZONE	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED:			SCALE				
DIMENSIONS ARE IN INCHES			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS & SHARP EDGES				
TOLERANCES ON			A				
FRACTIONS ± 1/64			DECIMALS ± .005				
			ANGLES ± 1/2°				

1	SBS-1			11-29-61
REQ. PER UNIT	MODEL	SECTION	ASSY. NO.	DATE