



NOTE - \* DENOTES TO TERMINAL OF FADE ALARM RELAY

\* DENOTES TO TERMINAL OF FADE ALARM RELAY

THIS SYMBOL DENOTES END OF INSULATION & NAIL DRIVING POINT WIRE MUST BE STRIPPED 1/2" BEYOND THIS POINT & TINNED 3/8" UNLESS OTHERWISE SPECIFIED.



WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN. SPACE LACING APPROX. 3/4" APART.

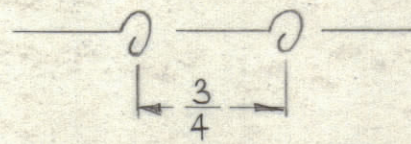

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used for manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:  
THE TECHNICAL MATERIEL CORPORATION  
MAMARONECK, NEW YORK

REQ. NO.	ITEM	PART NO.	DESCRIPTION	SYMBOL
50"	13	CD-101-1-MW	CORD LACING	BLACK
14"	12	RG-174/U	CABLE, COAXIAL	
7"	11	MWC22(7)U94	CABLE, INSULATED	WH/YEL
5 1/2"	10			BROWN
5 1/8"	9			GREEN
4 7/8"	8			BLUE
6"	7			RED
13 3/4"	6			BROWN
6"	5			ORANGE
20 1/8"	4			WH/BLU
6 3/4"	3			WH/YEL
12 1/4"	2			VIOLET
15 3/4"	1	MWC22(7)U2	CABLE, INSULATED	RED

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
CABLE ASSY, POWER ELECTRICAL, BRANCHED (MAIN)			
DRAWN		CHECKED	
TYPE & TEMPER		HEAT TREAT. SPEC.	
FINISH & SPEC. NO.		ELEC. DES. APP.	
		MECH. DES. APP.	
		SHEET OF	

SYM	ZONE	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED:							
DIMENSIONS ARE IN INCHES							
TOLERANCES ON							
FRACTIONS ± 1/64		DECIMALS ± .005		ANGLES ± 1/2°			
SCALE							
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS & SHARP EDGES							

REQ. PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE
1	AFC-3			1-11-62
USED ON				