


		REVISIONS					
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPR
	0	ORIGINAL RELEASE FOR PRODUCTION	3-26-64		A.M.		
C2	A	IT.26 WAS TE-156-32961	9.2.64	122B1	ASB	908	

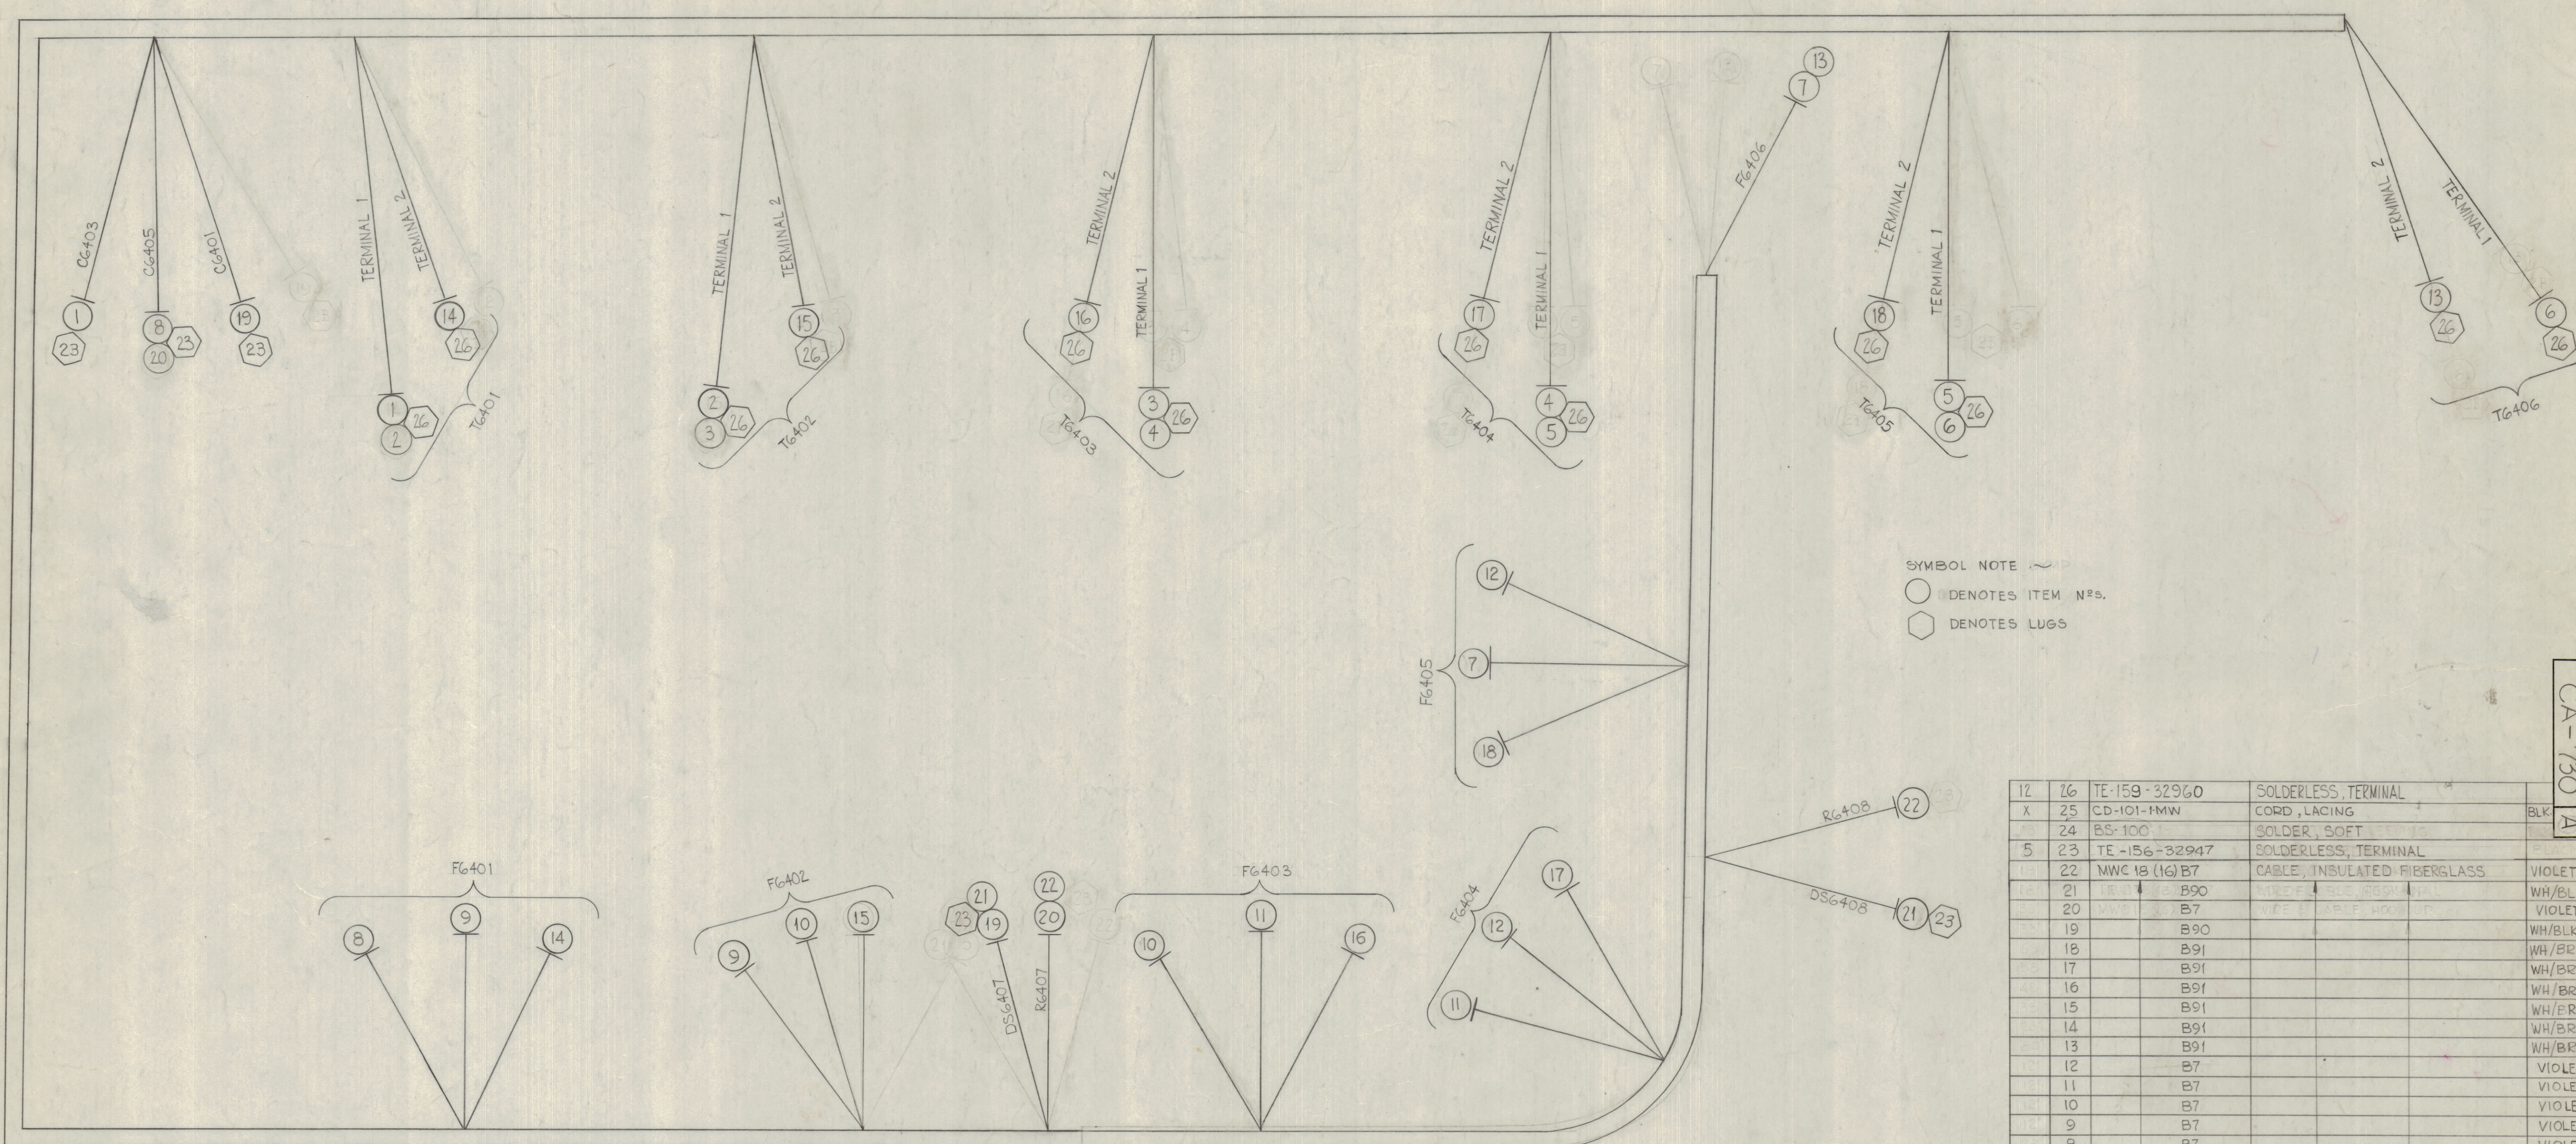

THIS SYMBOL DENOTES END OF INSULATION & NAIL DRIVING POINT WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT & TINNED 1/2" UNLESS OTHERWISE SPECIFIED

THIS EQUALS THIS

WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN. SPACE LACING APPROX. 3/4" APART

NOTES

1	GPT-200K	AD-110
QTY./UNIT	MODEL USED ON	ASSY. NO.
SCALE 1:1	CODE A	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN W.A. FRANCO DATE 9-25-63	
DECIMALS ± .05	FRACTIONS ± 1/64	CHECKED DATE 2/7/64	FINAL APPROVAL DATE
XXX ± .005	ANGLE ± 0° 30'	ELECT. DES. DATE 2/7/64	
	TOLERANCES	MECH. DES. DATE 2/7/64	

CA-730 A

THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK

TITLE WIRING HARNESS, BRANCHED (HVR)

CA-730 A