


CA-779 0

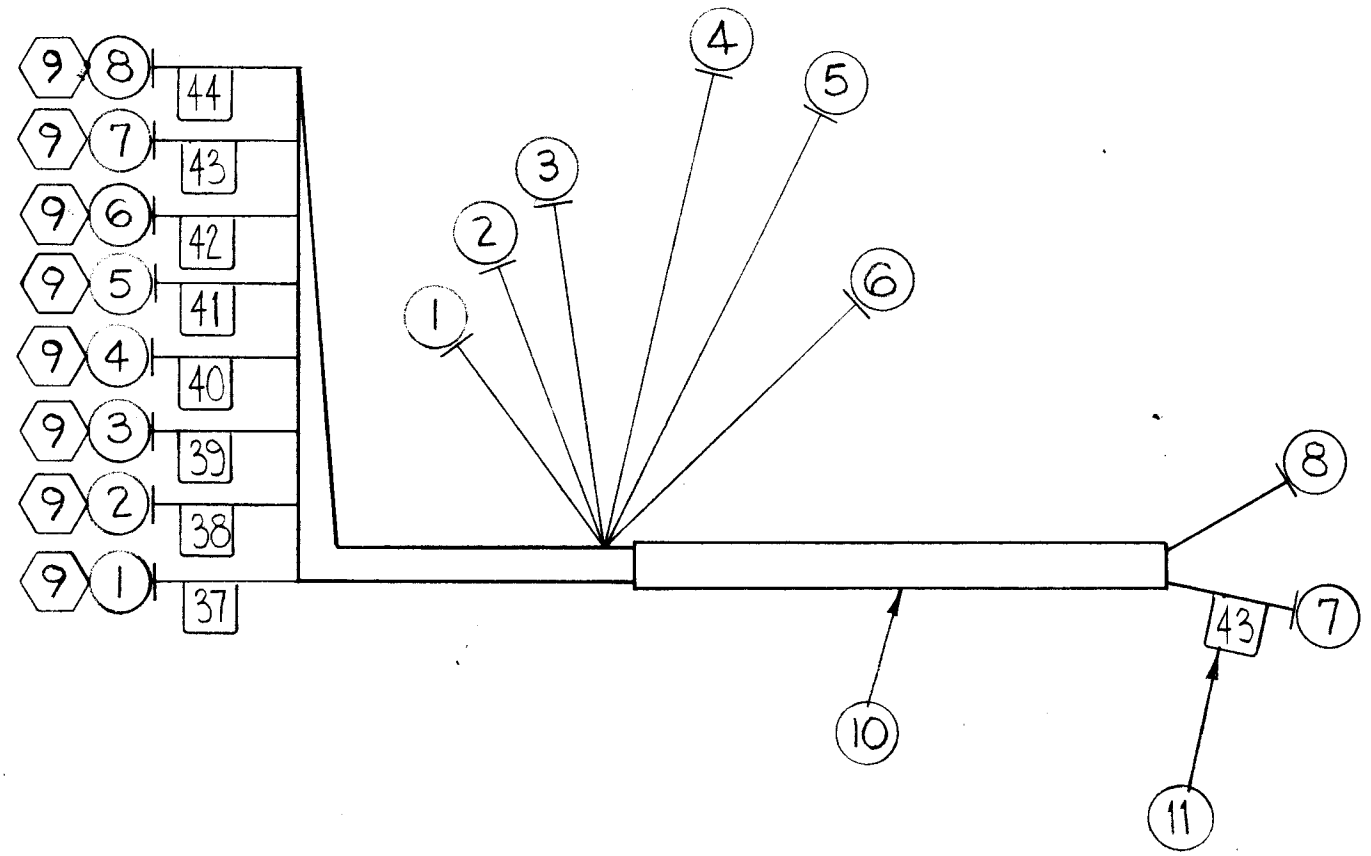

THIS SYMBOL DENOTES END OF INSULATION & NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT & TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

THIS EQUALS THIS

WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN. SPACE LACING APPROX. 3/4" APART.

NOTES

~SYMBOL NOTES~

- DENOTES ITEM NO.'S.
- ⬡ DENOTES LUGS.
- DENOTES TAGS.

1	GPT-200K	AR-147
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE	CODE	
	A	
THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.		

REVISIONS

SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
A	REDRAWN & REVISED					
0	ORIGINAL RELEASE FOR PRODUCTION	4-24-64		SRG		

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
	13	BS-100	SOLDER, SOFT	
	12	CD-101-1-MW	CORD, LACING	BLACK
	11	LA-101-37 THRU 44	WIRE MARKERS	
	10	PX-100-1-294	SLEEVING, INSULATION	BLACK
8	9	TE-120-2	LUG, SPADE	
	8	MWC20(7)B91	CABLE, INSULATED, FIBERGLASS	WH/BRN
	7	2		RED
	6	93		WH/ORN
	5	5		GREEN
	4	3		ORANGE
	3	96		WH/BLUE
	2	6		BLUE
	1	MWC20(7)B2	CABLE, INSULATED, FIBERGLASS	RED

F. BUDETTI		LIST OF MATERIAL	
MATERIAL		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
FINISH		TITLE CABLE ASS'Y., SWR RELAY JUMPER (RELAY A)	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN <i>E. Jansen</i>	DATE 4-24-63
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		CHECKED <i>W.F.</i>	DATE 2-7-64
FRACTIONS ± 1/64 ANGLES ± 0° 30'		ELECT. DES. <i>W.F.</i>	DATE 2-7-64
TOLERANCES		MECH. DES. <i>S.D.</i>	DATE 2-7-64
		FINAL APPROVAL <i>RDC</i>	
		DATE 4-24-64	
		SHEET CA-779	
		REV. LTR. 0	