




CA-785

THIS SYMBOL DENOTES END OF INSULATION & NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT & TINNED 1/2" UNLESS OTHERWISE SPECIFIED.



THIS EQUALS THIS

WIRES SHOULD BE PLACED IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN. SPACE LACING APPROX. 3/4" APART.

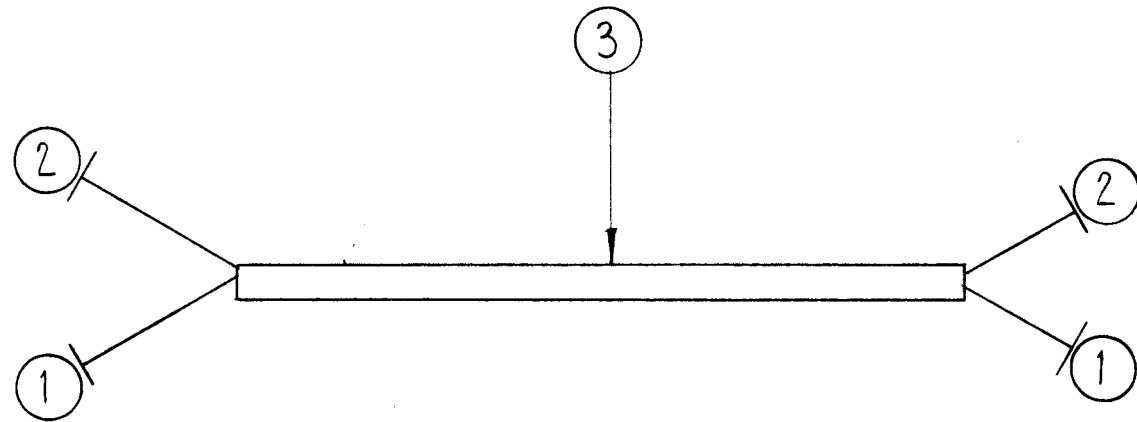

~SYMBOL NOTES~

○ DENOTES ITEM NOS.

○	ORIGINAL RELEASE FOR PROD.	4-24-64		SRG		
A	REDRAWN & REVISED					
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.

UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN INCHES  
 TOLERANCES ON FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 1/2°  
 CODE A  
 SCALE: MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

1	GPT-200K	AR-149		5-6-63
1	GPT-200K	AR-140		5-6-63
REQ. PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE

5	BS-100	SOLDER, SOFT	
4	CD-101-1-MW	CORD LACING	BLACK
3	PX-100-1-294	SLEEVING, INSULATION	BLACK
2	MWC 18(16) B4	CABLE, INSULATED, FIBERGLASS	YELLOW
1	MWC 18(16) B1	CABLE, INSULATED, FIBERGLASS	BROWN

REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
STOCK SIZE		CABLE ASS'Y., PLATE OVLD. RELAY B - JUMPER (RELAY A & B)		
MATERIAL				
TYPE & TEMPER		W.A. FRANCO	W.F.	RDC
HEAT TREAT. SPEC.		DRAWN	CHECKER	FINAL APPROVAL
FINISH & SPEC. NO.		QRB	J.D.	CA-785
		ELEC. DES. APP.	MECH. DES. APP.	0