


REVISIONS						
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD
	O	ORIGINAL RELEASE FOR PRODUCTION	3-26-64		A.M.	

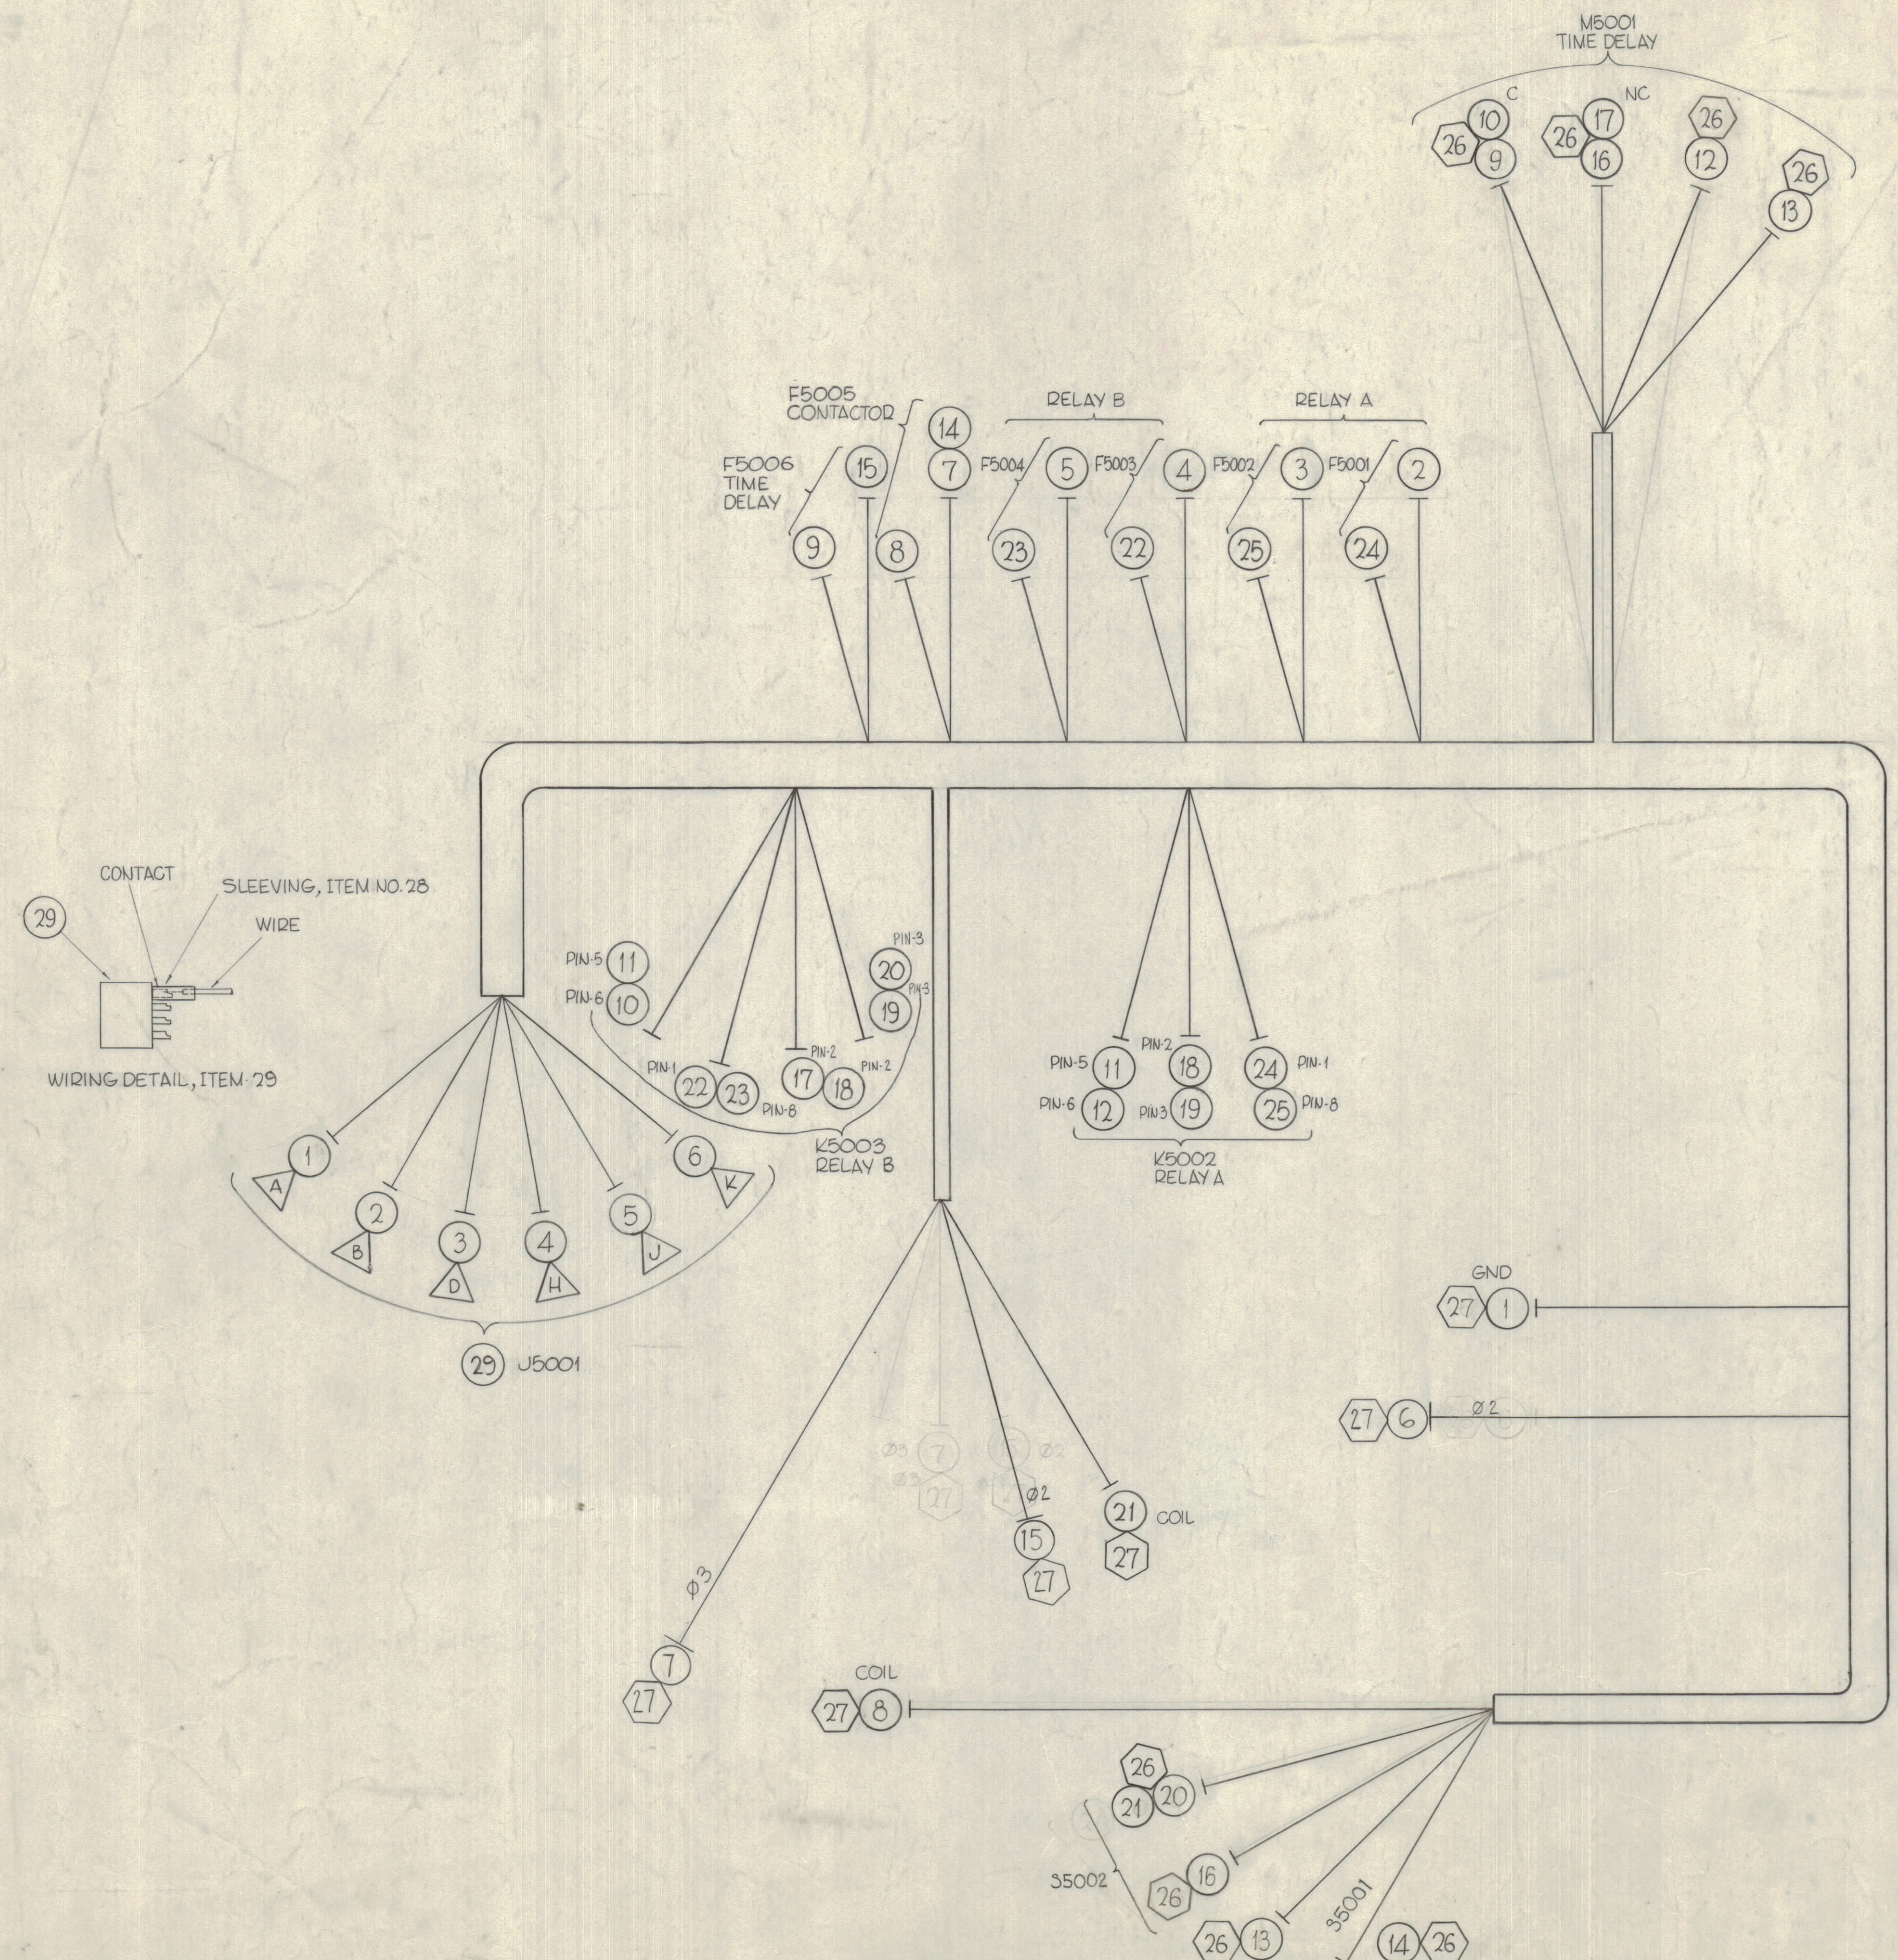

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
	31	BS-100	SOLDER, SOFT	
	30	CD-101-1-MW	CORD, LACING	BLACK
1	29	MS-3102A-20-27P	CONNECTOR, RECEPTACLE (MALE)	J5001
	28	PX-100-1-106	INSULATION, SLEEVING	BLACK
6	27	TE-159-34161	LUG, TERMINAL #10	
8	26	TE-159-34160	LUG, TERMINAL #8	
	25	MWC 20 (7) B-92	CABLE, INSULATED (FIBERGLASS)	WHITE/RED
	24			WHITE/BROWN
	23			WHITE/YELLOW
	22			WH/ORN
	21			WHITE/GREEN
	20			WHITE/GREEN
	19			WHITE/GREEN
	18			YELLOW
	17			YELLOW
	16			YELLOW
	15			WHITE/BLUE
	14			GRAY
	13			WHITE/GRAY
	12			GREEN
	11			RED
	10			BLUE
	9			BLUE
	8			WHITE/GRAY
	7			GRAY
	6			VIOLET
	5			YELLOW
	4			ORANGE
	3			RED
	2	MWC 20 (7) B-1		BROWN
1	1	MWC 18 (16) B-0	CABLE, INSULATED (FIBERGLASS)	BLACK

F. BUDETTI LIST OF MATERIAL			
MATERIAL	FINISH	TITLE	DATE
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		WIRING HARNESS BRANCHED (BLOWER DELAY)	5-15-63
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	DRAWN John C. Biele	CHECKED [Signature]	DATE 5-15-63
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	FRACTIONS ± 1/64 ANGLES ± 0° 30'	DATE 2-10-64	REV. LTR. 0

○ DENOTES ITEM NO. △ DENOTES PINS ON CONNECTOR
 ○ DENOTES LUG

WIRE SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN. SPACE LACING (ITEM 30) AS SHOWN BELOW.

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2".

THIS EQUALS THIS

NOTES

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

SCALE 1:1 MODEL USED ON A AX-393 ASBY. NO. DATE 5-15-63 FINAL APPROVAL [Signature] DATE 5-15-63 SHEET CA-787-0 REV. LTR. 0