


WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN. SPACE LACING APPROXIMATELY 3/4" APART.

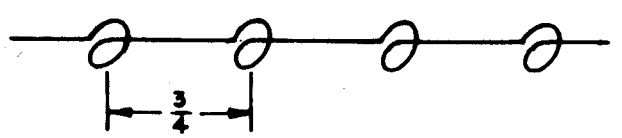

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

NOTES

~SYMBOL DENOTES~

- ITEM NOS
- LUGS
- PINS

CA-810

REVISIONS					
SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD APPD
A	REDRAWN & REVISED				
0	ORIGINAL RELEASE FOR PRODUCTION	5-18-64		SRG	

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
	11	CD-101-1-MW	CORD LACING	BLACK
	10	BS-100	SOLDER, SOFT	
5	9	TE-156-32948	SOLDERLESS, TERMINAL	
1	8	MS3102A16S-15	CONNECTOR, PLUG	J5301
	7	PX-100-1-375	SLEEVING, INSULATION	BLACK
	6	PX-100-1-106	SLEEVING, INSULATION	BLACK
	5	MWC20(7)B0	CABLE, INSULATED FIBERGLASS	BLACK
	4	97		WH/VIO
	3	4		YELLOW
	2	98		WH/GRAY
	1	MWC20(7)B7	CABLE, INSULATED FIBERGLASS	VIOLET

F. BUDETTI LIST OF MATERIAL

MATERIAL		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
FINISH		TITLE CABLE ASS'Y. TOP FAN			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN W.A. FRANCO	DATE 8-21-63	FINAL APPROVAL <i>[Signature]</i>	
		CHECKED <i>[Signature]</i>	DATE		
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		ELECT. DES. <i>[Signature]</i>	DATE 5/13/64	CA-810	
FRACTIONS ± 1/64 ANGLES ± 0° 30'		MECH. DES. <i>[Signature]</i>	DATE 2-17-64	SHEET	
				0	REV. LTR.

1	GPT-200K	AX-395
QTY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE	CODE	
THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.		