| REVISIONS | | | | | | |
|---|---|---|---|---|---|---|
| ZONE | SYM | DESCRIPTION | DATE | E.M.N. NO. | DRAFT | CHKD | APPD |
| | X | EXPERIMENTAL RELEASE | 3/23/64 | | NP | | |
| | O | PRODUCTION RELEASE | 3/26/64 | | NP | | |

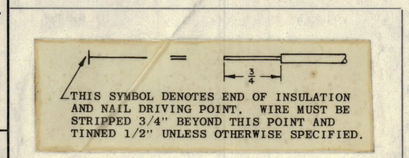

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.




THE ABOVE SYMBOL DENOTES END OF SHIELD, WHICH SHOULD BE TERMINATED AS SHOWN, LEAVING EXCESS SHIELDING AS A PIGTAIL. TIN PIGTAIL 1/4 INCH.

WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN. SPACE LACING APPROXIMATELY 3/4" APART.

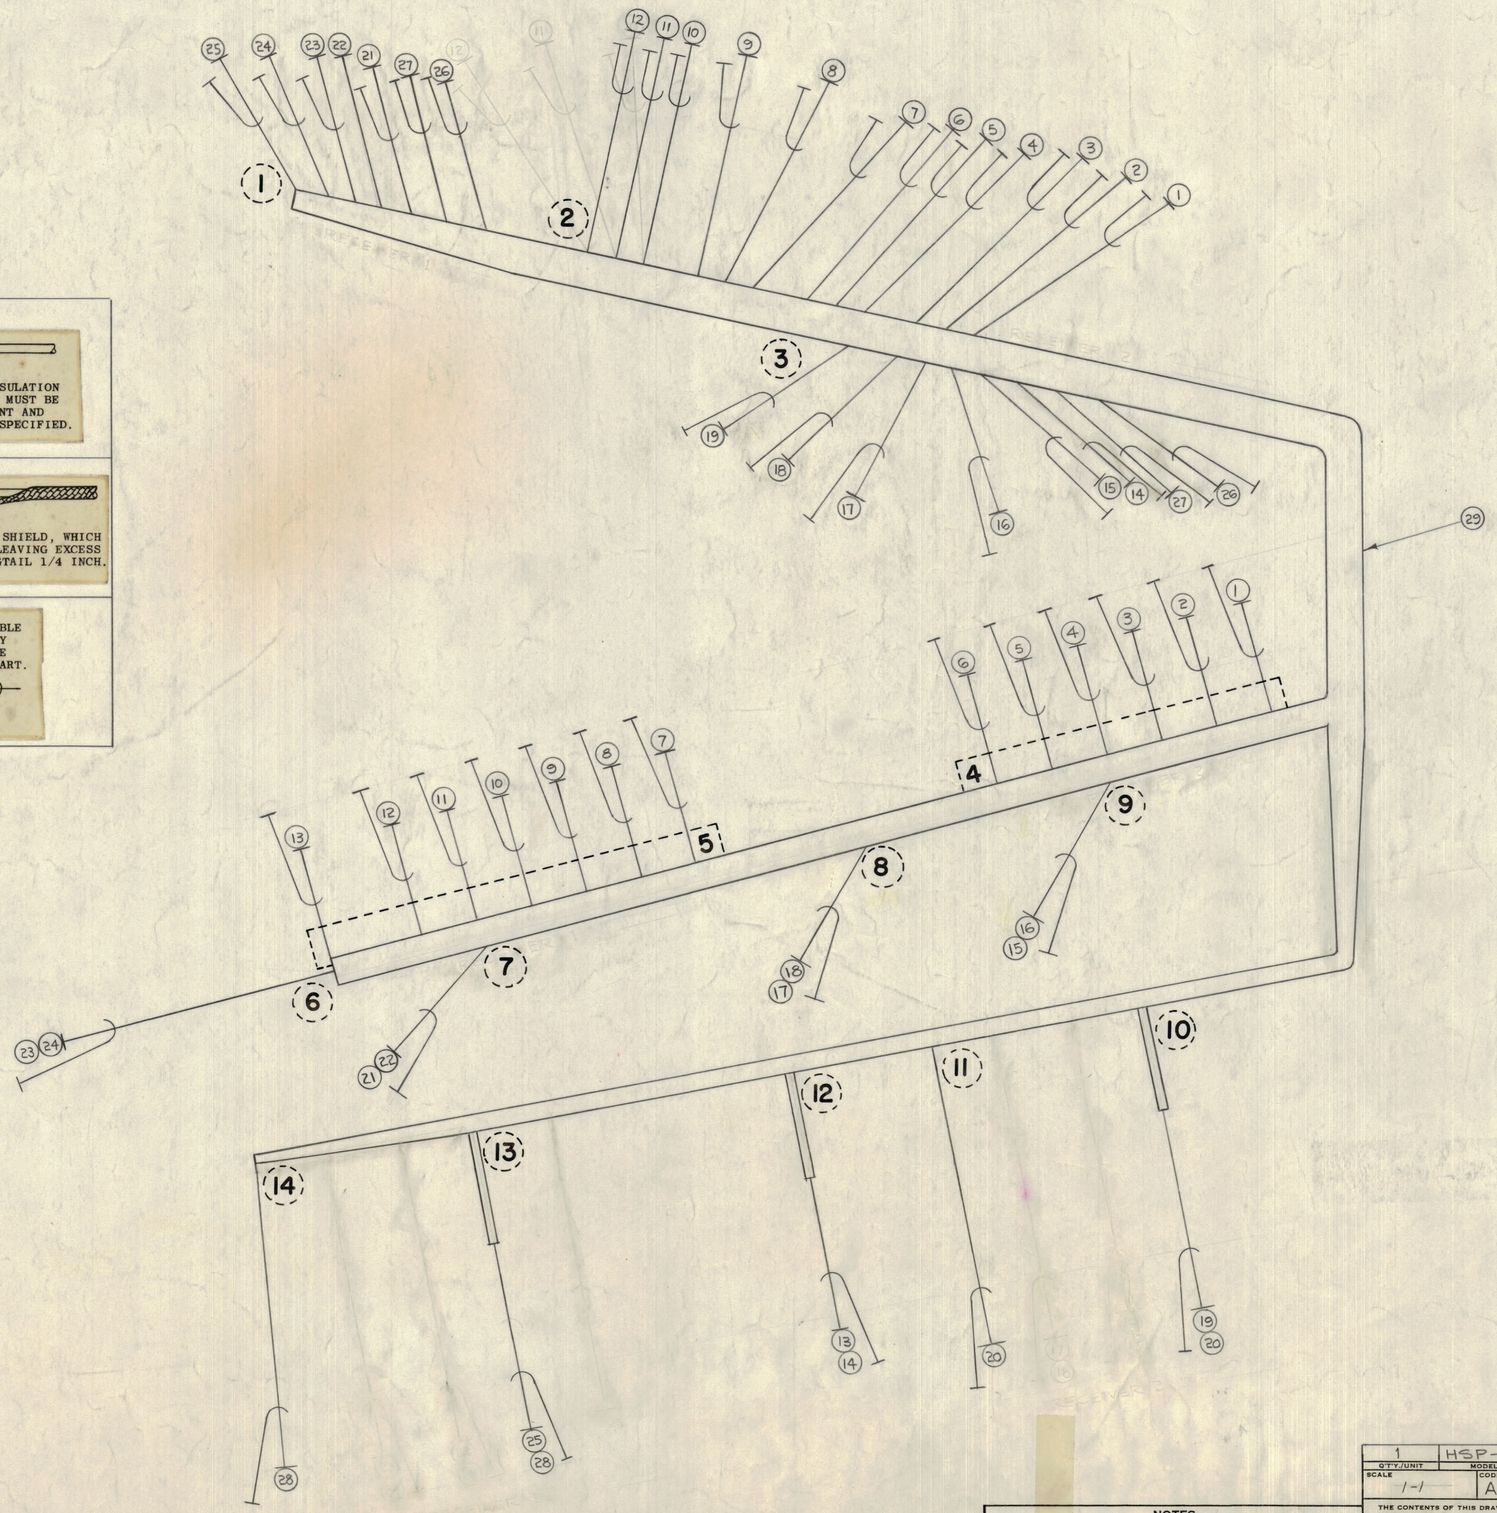


| | | | | | | | |
|---|---|---|---|---|---|---|---|
| | | X | 30 | BS-100 | SOLDER, SOFT | | |
| | | X | 29 | CD-101-1-MW | CORD, LACING, NYLON, FLAT | | BLK |
| 13 | 14 | 12½ | 28 | MWC22(7)SJ97 | S9202 | S9203 | WHT-VIO |
| 1 | 3 | 15 | 27 | SJ8 | TB9202 TERM. 9 | TB9201 TERM. 9 | GRAY |
| 1 | 3 | 15 | 26 | SJ98 | 8 | TB9201 TERM 8 | WHT-GRAY |
| 1 | 13 | 41½ | 25 | SJ2 | 16 | R9201 | RED |
| 1 | 6 | 40 | 24 | SJ6 | 14 | T9201 (INPUT) | BLU |
| 1 | 6 | 39 | 23 | SJ4 | 13 | T9201 (INPUT) | YEL |
| 1 | 7 | 35 | 22 | SJ7 | 12 | T9202 (INPUT) | VIO |
| 1 | 7 | 34 | 21 | SJ8 | TB9202 TERM. 11 | T9202 (INPUT) | ORN |
| 10 | 11 | 13 | 20 | SJ97 | R9201 | R9202 | WHT-VIO |
| 3 | 10 | 25 | 19 | SJ92 | TB9101 TERM. 16 | R9202 | WHT-RED |
| 3 | 8 | 23 | 18 | SJ96 | 14 | T9203 (INPUT) | WHT-BLU |
| 3 | 8 | 23 | 17 | SJ94 | 13 | T9203 (INPUT) | WHT-YEL |
| 3 | 9 | 18 | 16 | SJ97 | 12 | T9204 (INPUT) | WHT-VIO |
| 3 | 9 | 18 | 15 | SJ93 | 11 | T9204 (INPUT) | WHT-ORN |
| 3 | 12 | 28¾ | 14 | SJ95 | TB9101 TERM. 10 | S9201 | WHT-GRN |
| 6 | 12 | 33 | 13 | SJ5 | S9201 | L9214 | GRN |
| 2 | 5 | 34 | 12 | SJ8 | TB9203 TERM. 16 | L9215 | GRAY |
| 2 | 5 | 33 | 11 | SJ9 | 15 | L9216 | WHT |
| 2 | 5 | 32 | 10 | SJ98 | 14 | L9217 | WHT-GRAY |
| 2 | 5 | 30½ | 9 | SJ8 | 12 | L9218 | GRAY |
| 2 | 5 | 29¼ | 8 | SJ9 | 11 | L9219 | WHT |
| 2 | 5 | 28¼ | 7 | SJ98 | 10 | L9220 | WHT-GRN |
| 2 | 4 | 23 | 6 | SJ8 | 8 | L9221 | GRAY |
| 2 | 4 | 22 | 5 | SJ9 | 7 | L9222 | WHT |
| 2 | 4 | 21 | 4 | SJ98 | 6 | L9223 | WHT-GRAY |
| 2 | 4 | 19 | 3 | SJ8 | 4 | L9224 | GRAY |
| 2 | 4 | 18 | 2 | SJ9 | 3 | L9225 | WHT |
| 2 | 4 | 17 | 1 | MWC 22(7)SJ98 | TB9203 TERM. 2 | L9226 | WHT-GRAY |
| FROM | TO | REQ'D. | ITEM | PART NUMBER | FROM | TO | SYMBOL |

NOTES

1. HSP-3

| Q'TY./UNIT | MODEL USED ON | ASS'Y. NO. |
|---|---|---|
| 1 | HSP-3 | |

SCALE 1-1 CODE A

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

I. JOHNSON — LIST OF MATERIAL

MATERIAL

FINISH

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

TITLE: WIRING HARNESS, BRANCHED HSP-3

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS .X ± .05, .XX ± .01, .XXX ± .005 — TOLERANCES — FRACTIONS ± 1/64, ANGLES ± 0° 30'

| | | DATE | FINAL APPROVAL | DATE |
|---|---|---|---|---|
| DRAWN | [illegible] | 10-28-63 | [illegible] | 3/26/64 |
| CHECKED | [illegible] | 5-25-64 | | |
| ELECT. DES. | [illegible] | 5-26-64 | | |
| MECH. DES. | [illegible] | 3-26-64 | | |

CA-837 — SHEET 1 — REV. LTR. O

TMC FORM 111