




CA-862 B

REVISIONS

| SYM | DESCRIPTION   | DATE    | E.M.N. NO. | DRAFT  | CHKD | APPD |
|-----|---|---------|------------|--------|------|------|
| O   | ORIGINAL RELEASE FOR PRODUCTION   | 4-17-64 | 0          | A.M.   |      |      |
| A   | ITEMS 8,9,10,11,12 ADDED. PICT. CLARIFIED.                                  | 3-31-67 | 18071      | L.A.K. |      |      |
| B   | ON PICTORIAL, ITEM 11 WAS 12, ITEM 10 WAS 11, ITEM 9 WAS 10 & ITEM 12 WAS 9 | 5-8-67  | 18174      | G.D.U. |      |      |


NOTE:

-  INDICATES IT.5 & 6 ATTACHED TO WIRE AT NAIL POINT.
-  DENOTES ITEM NO.

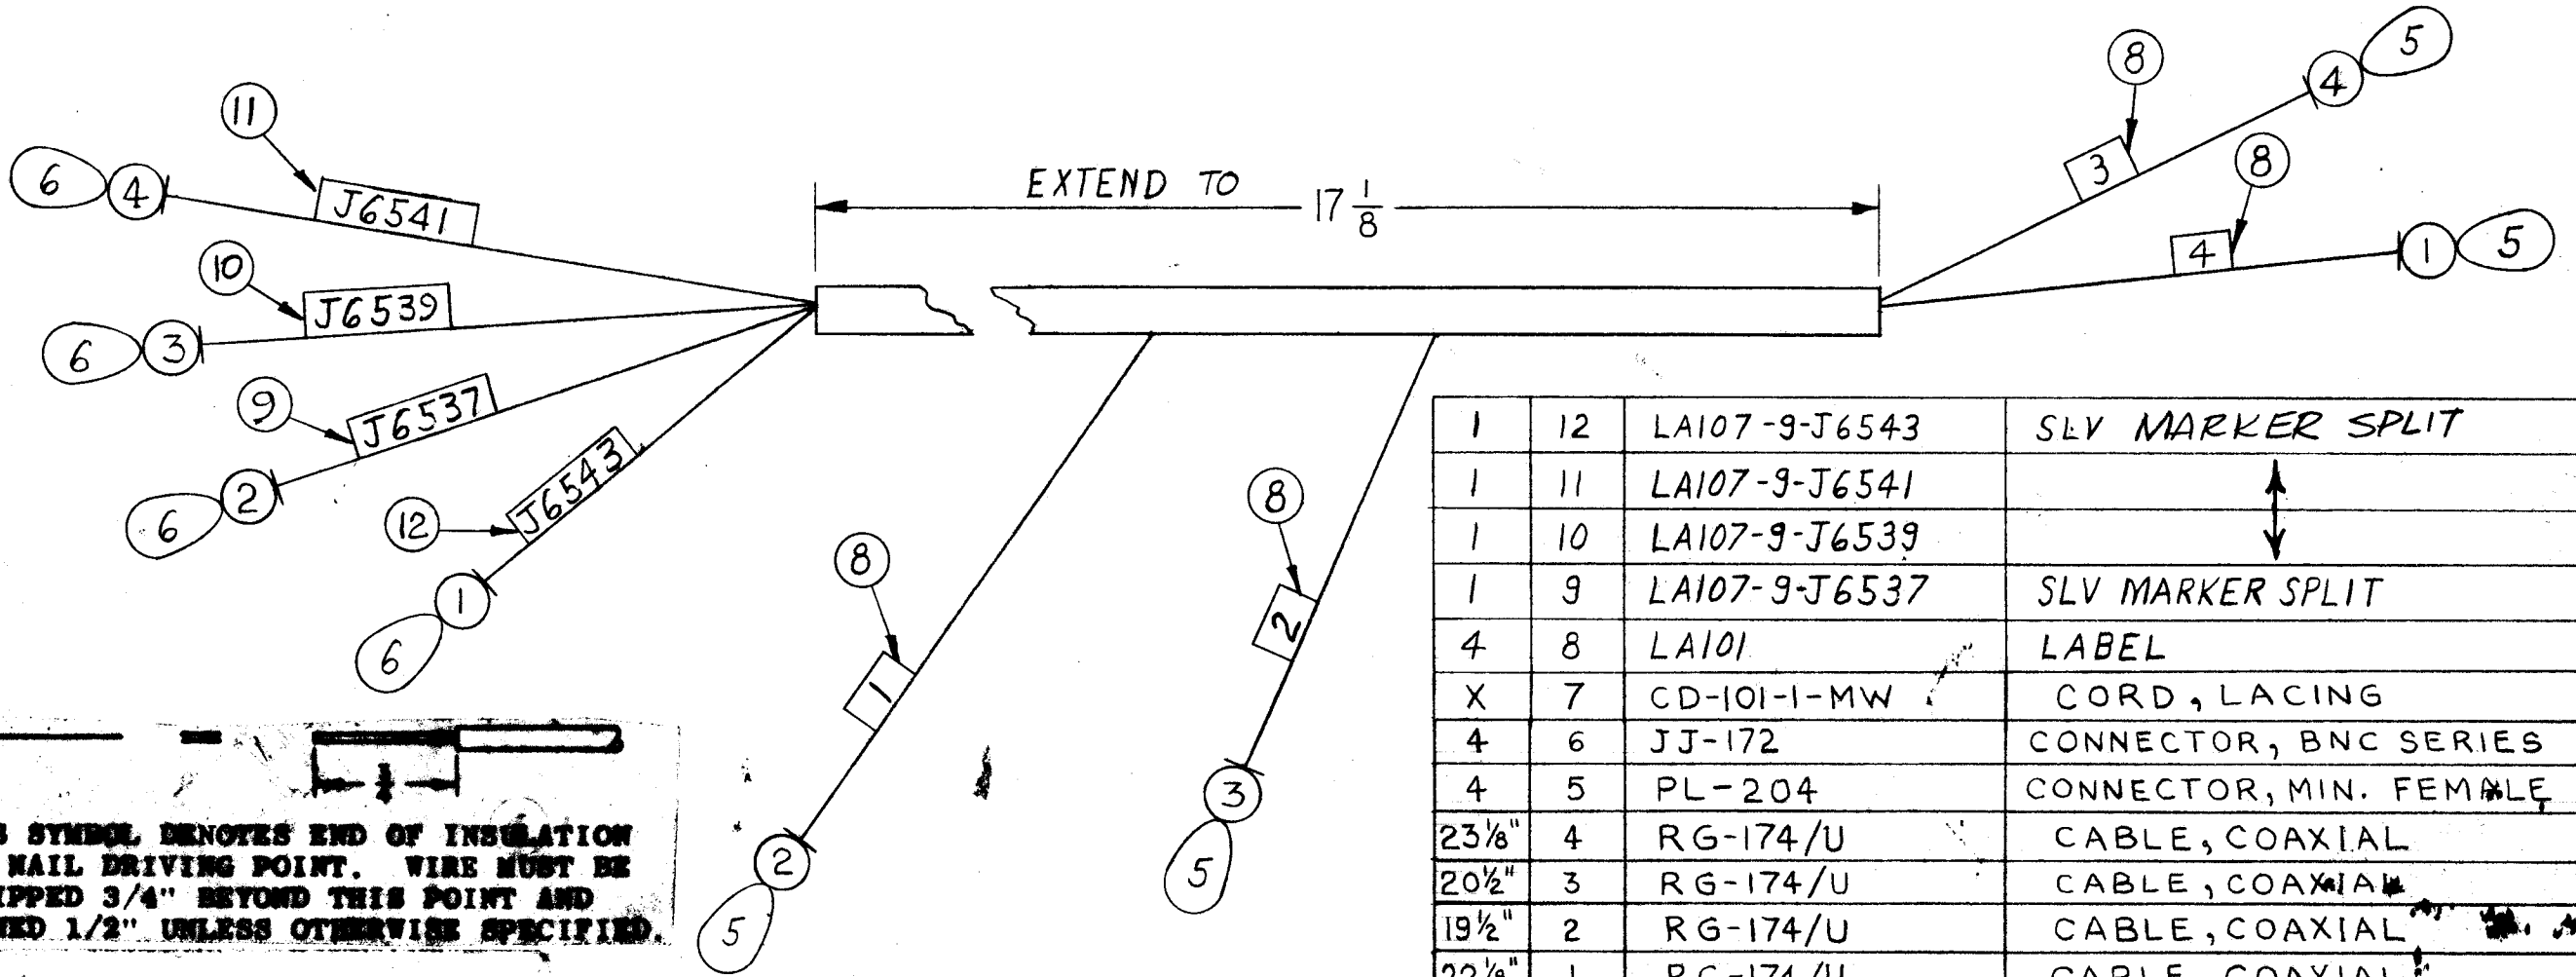

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN. SPACE LACING APPROXIMATELY 3/4" APART.



| REQ'D.  | ITEM | PART NUMBER   | DESCRIPTION            | SYMBOL |
|---------|------|---------------|------------------------|--------|
| 1       | 12   | LA107-9-J6543 | SLV MARKER SPLIT       |        |
| 1       | 11   | LA107-9-J6541 |                        |        |
| 1       | 10   | LA107-9-J6539 |                        |        |
| 1       | 9    | LA107-9-J6537 | SLV MARKER SPLIT       |        |
| 4       | 8    | LA101         | LABEL                  |        |
| X       | 7    | CD-101-1-MW   | CORD, LACING           |        |
| 4       | 6    | JJ-172        | CONNECTOR, BNC SERIES  |        |
| 4       | 5    | PL-204        | CONNECTOR, MIN. FEMALE |        |
| 23 1/8" | 4    | RG-174/U      | CABLE, COAXIAL         |        |
| 20 1/2" | 3    | RG-174/U      | CABLE, COAXIAL         |        |
| 19 1/2" | 2    | RG-174/U      | CABLE, COAXIAL         |        |
| 22 1/8" | 1    | RG-174/U      | CABLE, COAXIAL         |        |

AALTONEN LIST OF MATERIAL

|   |   |                        |                               |
|---|---|------------------------|-------------------------------|
| MATERIAL  | THE TECHNICAL MATERIEL CORP.<br>AALTONEN MAMARONECK, NEW YORK |                        |                               |
| FINISH  | TITLE<br>WIRING, HARNESS<br>DEMUX CABLE                       |                        |                               |
| UNLESS OTHERWISE SPECIFIED<br>DIMENSIONS ARE IN INCHES AND INCLUDE<br>CHEMICALLY APPLIED OR PLATED FINISHES | DRAWN<br>NTB.   | DATE<br>2-28-64        | FINAL APPROVAL<br>[Signature] |
| DECIMALS<br>.X ± .05<br>.XX ± .01<br>.XXX ± .005  | TOLERANCES<br>± 1/64<br>ANGLES<br>± 0° 30'                    | CHECKED<br>[Signature] | DATE<br>4-13-64               |
| ELECT. DES.<br>[Signature]  |   | DATE<br>4-13-64        | REV. LTR<br>CA-862 B          |
| MECH. DES.<br>[Signature]   |   | DATE<br>4-13-64        | SHEET                         |

|   |               |            |
|---|---------------|------------|
| 1   | MSA-1         | A-3398     |
| Q'TY./UNIT  | MODEL USED ON | ASS'Y. NO. |
| SCALE<br>1:1  | CODE<br>A     |            |
| THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN. |               |            |

NOTES