RE PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	CA 864	A
	RAK-35		3/13/64		

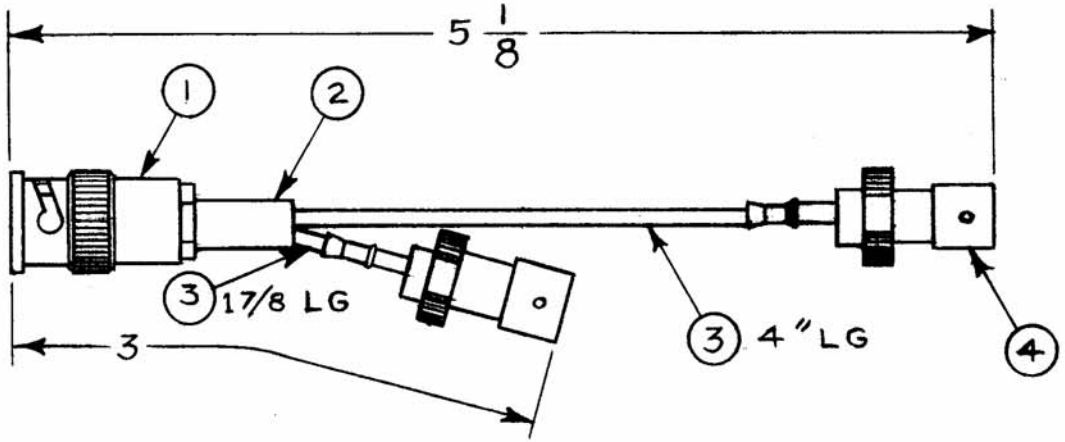

SUPERSEDED

DIRECTLY REPLACED BY

UG 274 */U

NOTES:

1. CRIMP ITEM (4) TO ITEM (3) WITH CRIMPING TOOL.
2. STRIP BOTH ENDS OF ITEM (3) 1/4" LONG.

REQ.	ITEM	PART NO.	I. JOHNSON DESCRIPTION	SYMBOL
2	4	PL 243-1	CONNECTOR, BNC PLUG, CRIMP	
X	3	RG 174/U	CABLE, COAXIAL	
5/8	2	PX 830-10-1	INSULATION SLEEVING, ELECT	
1	1	UG 260/U	CONNECTOR, BNC PLUG, CRIMP	

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	ADDED SUPERSEDED NOTE	8.16.66	16770	RME	QCB	MK
Ø	ORIGINAL RELEASE FOR PRODUCTION	12.1.64	Ø	G.F.		
X	EXPERIMENT RELEASE	3/13/64		NP		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES: DECIMALS .X ±.05, .XX ± .01, .XXX ±.005; FRACTIONS ± 1/64; ANGLES ± 0° 30'

SCALE 1:1

CODE S401-71

STOCK SIZE —

MATERIAL —

TYPE & TEMPER — | HEAT TREAT. SPEC. —

FINISH & SPEC. NO. —

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

CABLE ASSY.

R.F., BRANCHED

DRAWN	CHECKED	FINAL APPROVAL
N. Peters	@	RPC

ELEC. DES. APP. | MECH. DES. APP.

CA 864 | A

TMC FORM-108-A

STOCK NO. 1015