


REVISIONS					
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	APPD
	Ø	ORIGINAL RELEASE FOR PRODUCTION	8-18-64	0	SRG

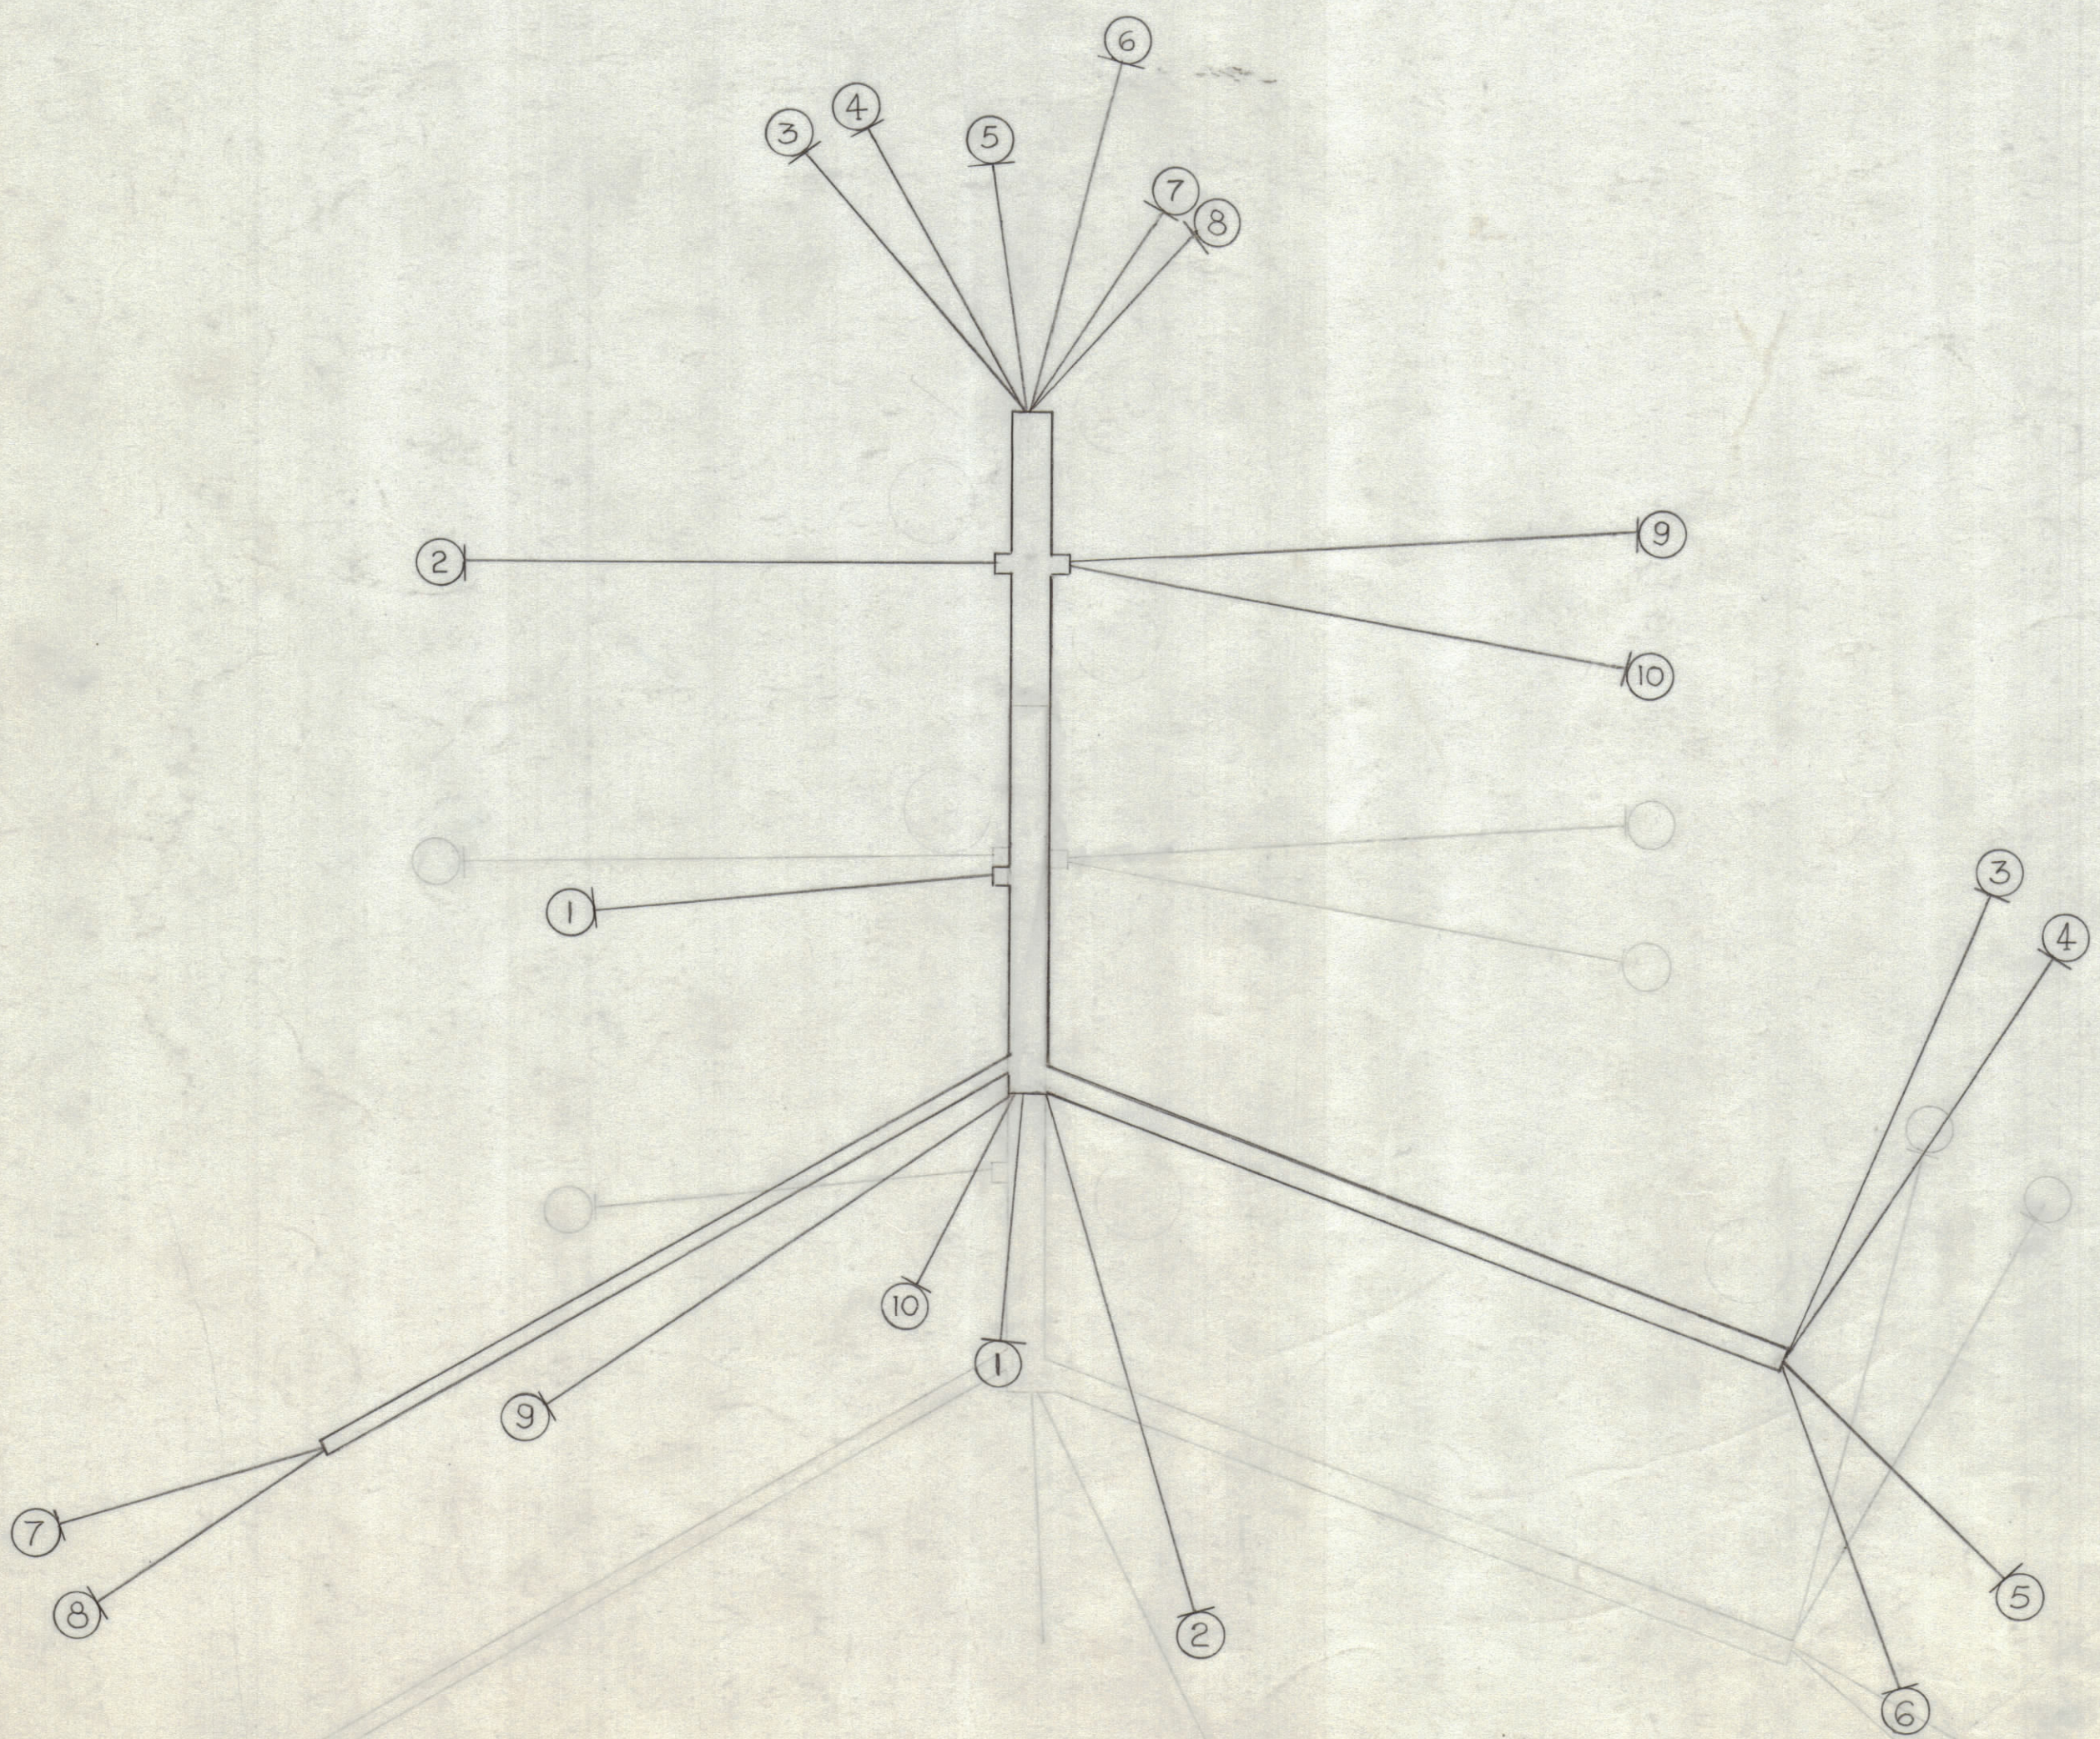

WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN. SPACE LACING APPROXIMATELY 3/4" APART.

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

NOTES

I			MFP-1		
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.	Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE	CODE		SCALE	CODE	
	A			A	

REQ'D.	ITEM	PART NUMBER	FROM	TO	SYMBOL
X	12	BS100	SOLDER, TIN ALLOY		
X	11	CD-101-1-MW	CORD, LACING		
10	10	MWC22 (7) U 6	K7001-B	C7001	BLUE
12	9	MWC22 (7) U 96	R7015	DS7001	WHT/BLU
13	8	MWC16 (19) U 8	F7002	TERM. STRIP	GREY
13	7	MWC16 (19) U 98	F7002		WHT/GREY
15	6	MWC22 (7) U 2	F7001		RED
14	5	U 92	F7001		WHT/RED
15	4	U 7	F7003		VIOLET
16	3	U 97	F7003	TERM. STRIP	WHT/VIO
11	2	U 5	R7016	T7003-14	GREEN
7	1	MWC 22 (7) U 95	DS7002	T7003-15	WHT/GRN

AALTONEN		LIST OF MATERIAL			
MATERIAL		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
FINISH		TITLE WIRING, HARNESS, BRANCHED			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	DRAWN WB.	DATE 2.27.64	FINAL APPROVAL [Signature]	DATE	
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	CHECKED [Signature]	DATE 8-19-64	DATE 8-19-64	CA-868	Ø
FRACTIONS ± 1/64 ANGLES ± 0° 30'	ELECT. DES. [Signature]	DATE	DATE		
TOLERANCES	MECH. DES.	DATE	DATE		
		SHEET			REV. LTR.

CA-868