



**SYMBOLS**

- DENOTES ITEM NUMBERS
- △ DENOTES PIN NUMBERS



CA957 A

**REVISIONS**


SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X	EXPERIMENTAL RELEASE	11.13.64	X	NB		
Ø	ORIGINAL RELEASE FOR PRODUCTION	11.19.64	Ø	P.L.		
A	ON U/O BLOCK, LFSB-1/AX520 WAS LFSB-1	12.18.64	13073	HLA		

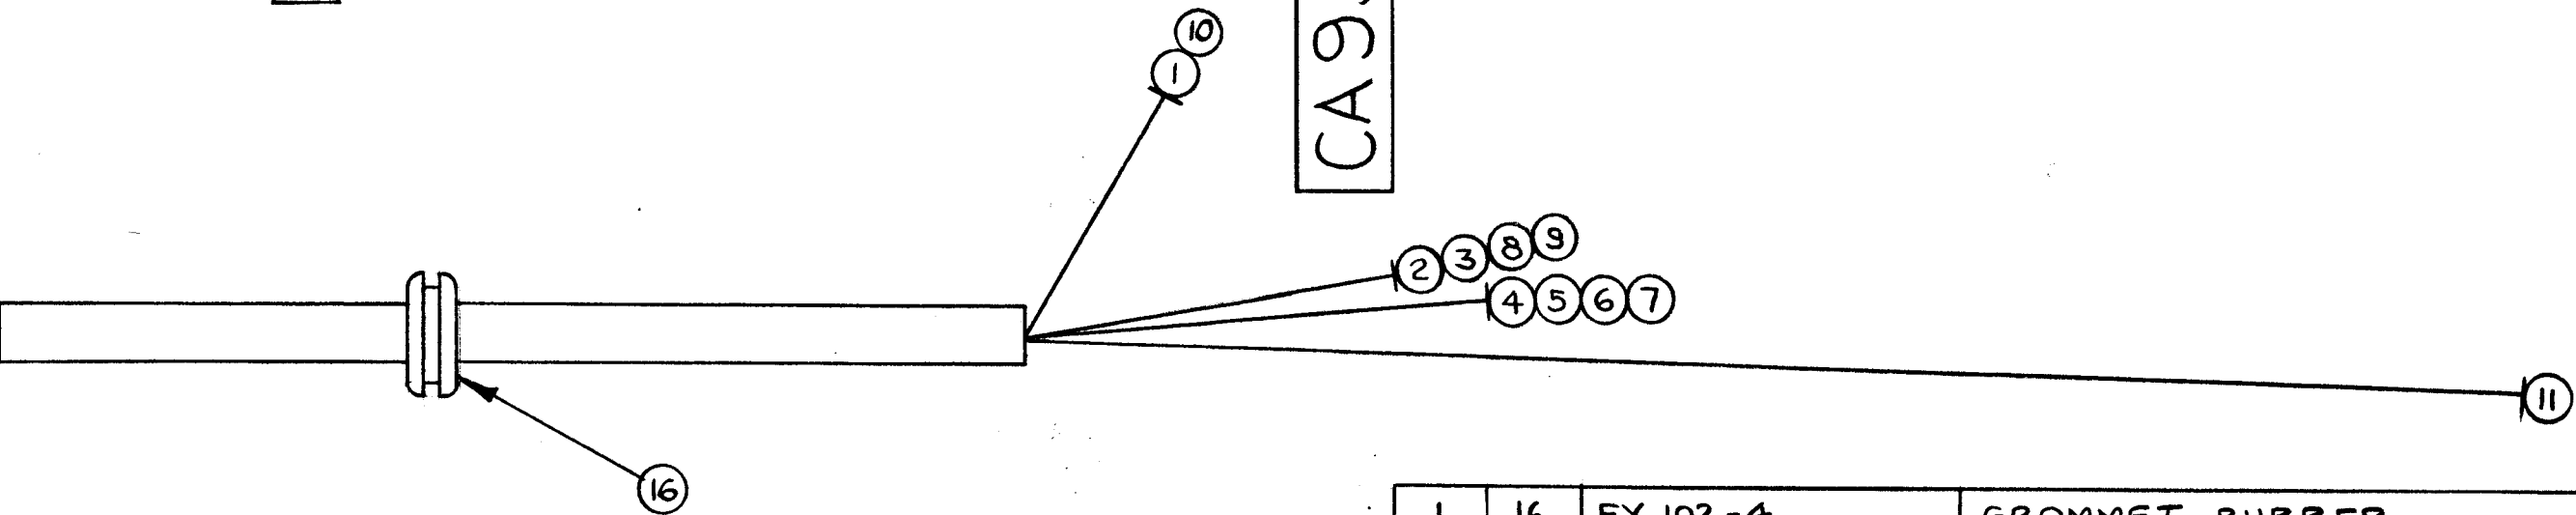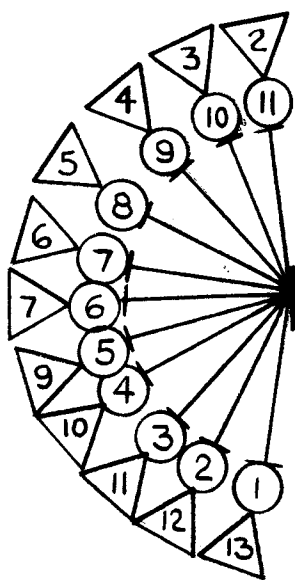

**TS-157 DETAIL**

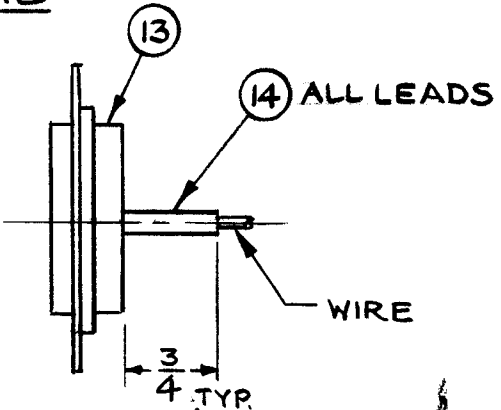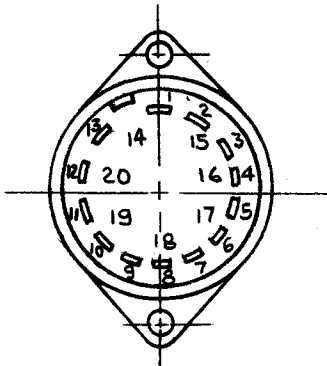


REQ'D.	ITEM	PART NUMBER	FROM	DESCRIPTION	TO	SYMBOL
	1	16	EY 102-4	GROMMET, RUBBER		
X	15	BS 100	SOLDER, TIN ALLOY			
9	14	PX 100-1-.085	SLEEVING, INSULATION			
1	13	TS 157	SOCKET, TUBE, DIGITAL READOUT	XDS351		
X	12	CD 101-1-MW	CORD, LACING			
	11	MWC24 (7) U92	XDS351 PIN 2	A-3307 TERMINAL * 7		
	10	U0	3	S351-A TERMINAL 0		
	9	U9	4		9	
	8	U8	5		8	
	7	U7	6		7	
	6	U6	7		6	
	5	U5	9		5	
	4	U4	10		4	
	3	U3	11		3	
	2	U2	12		2	
	1	MWC24 (7) U1	XDS351 PIN 13	S351-A TERMINAL		



THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN. SPACE LACING APPROXIMATELY 3/4" APART.

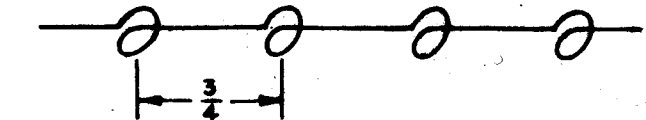

**NOTES**

5	LFSB-1/AX520	A3844
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE 1:1	CODE A	

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

**O. POSE LIST OF MATERIAL**

**THE TECHNICAL MATERIEL CORP.**  
MAMARONECK, NEW YORK

**TITLE: WIRING HARNESS (SPECTRUM FILTER)**

DRAWN: <i>NB</i>	DATE: 11.13.64	FINISH APPROVAL: <i>RL</i>	DATE:
CHECKED: <i>@</i>	DATE: 11-16-64		
ELFST. DES.:	DATE:	SHEET: CA957	
MECH. DES.:	DATE:	REV. LTR. A	