STANDARD DRAWING

QTY PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	CB-132

CODE NO	CAT. NO.	CAP. μμf MAX.	CAP. μμf MIN.	NO. PLATES	"A" DIM.
25	APC-25	25	3.0	7	21/64
50	-50	50	3.9	14	1/2
75	-75	75	4.6	20	11/16
100	-100	100	5.5	27	59/64
140	-140	140	6.7	37	1 9/32

SHAFT TYPE		
A		HEX COLLAR - SLOTTED SHAFT - WRENCH OR SCREWDRIVER ADJ.
B		1/2" LONG ROUND SHAFT. 1/4"
C		LOCKING TYPE

AIR GAP - 0.015" NOMINAL.
TESTED AT - 600V RMS, 60~

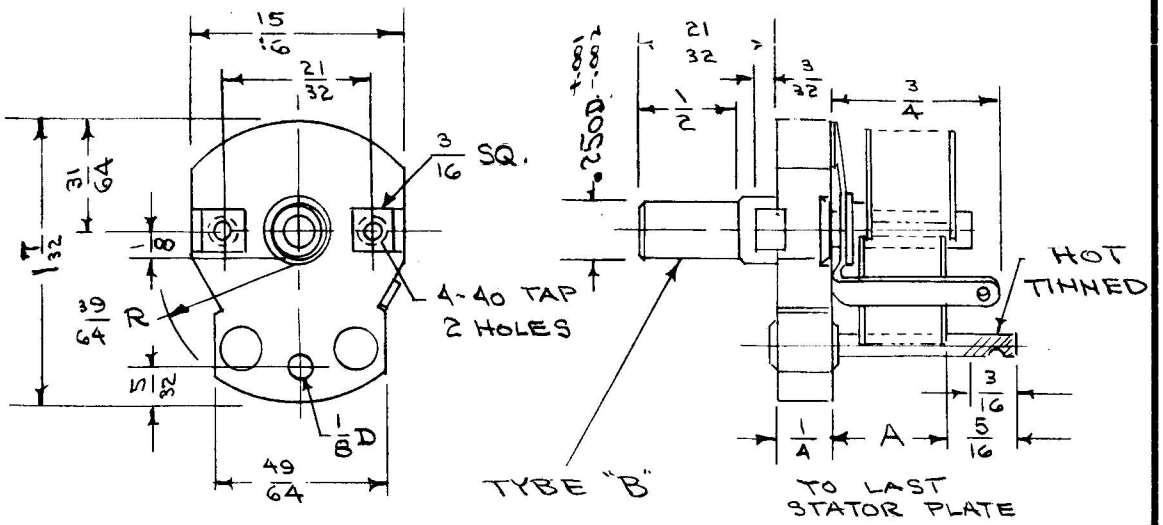

TYPE DESIGNATION TO BE IN FOLLOWING FORM

CB-132 - 100 - A

TMC NO. — MAX. CAP. μμf — SHAFT TYPE

REF: HAMMARLUND MFG. CO "APC"

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

CAPACITOR, VARIABLE
AIR TUNING

TOLERANCES	SCALE:	STOCK SIZE	MATERIAL	DRAWN	CHECKED	FINAL APPROVAL
DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±	MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES		TYPE & TEMPER / HEAT TREAT. SPEC.	CDD. 5/16/56	A. J. J.	CB-132
			FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	

FORM - 108 - A