


B.  
CB170

REVISIONS

SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X	EXPERIMENTAL RELEASE	6-29-64		G.D.L.		
Ø	ORIGINAL RELEASE FOR PRODUCTION	6/30/64	Ø	A.M.		
A	TMC CODE 7.5 DELETED, VOLTAGE PEAK WAS 7.5KV	2-15-65	-	J.S.	J.P.S.	
B	TOL. ADDED ON 4-3/16 & 8-1/4	1-19-66	15544	M.B.	J.P.S.	aa

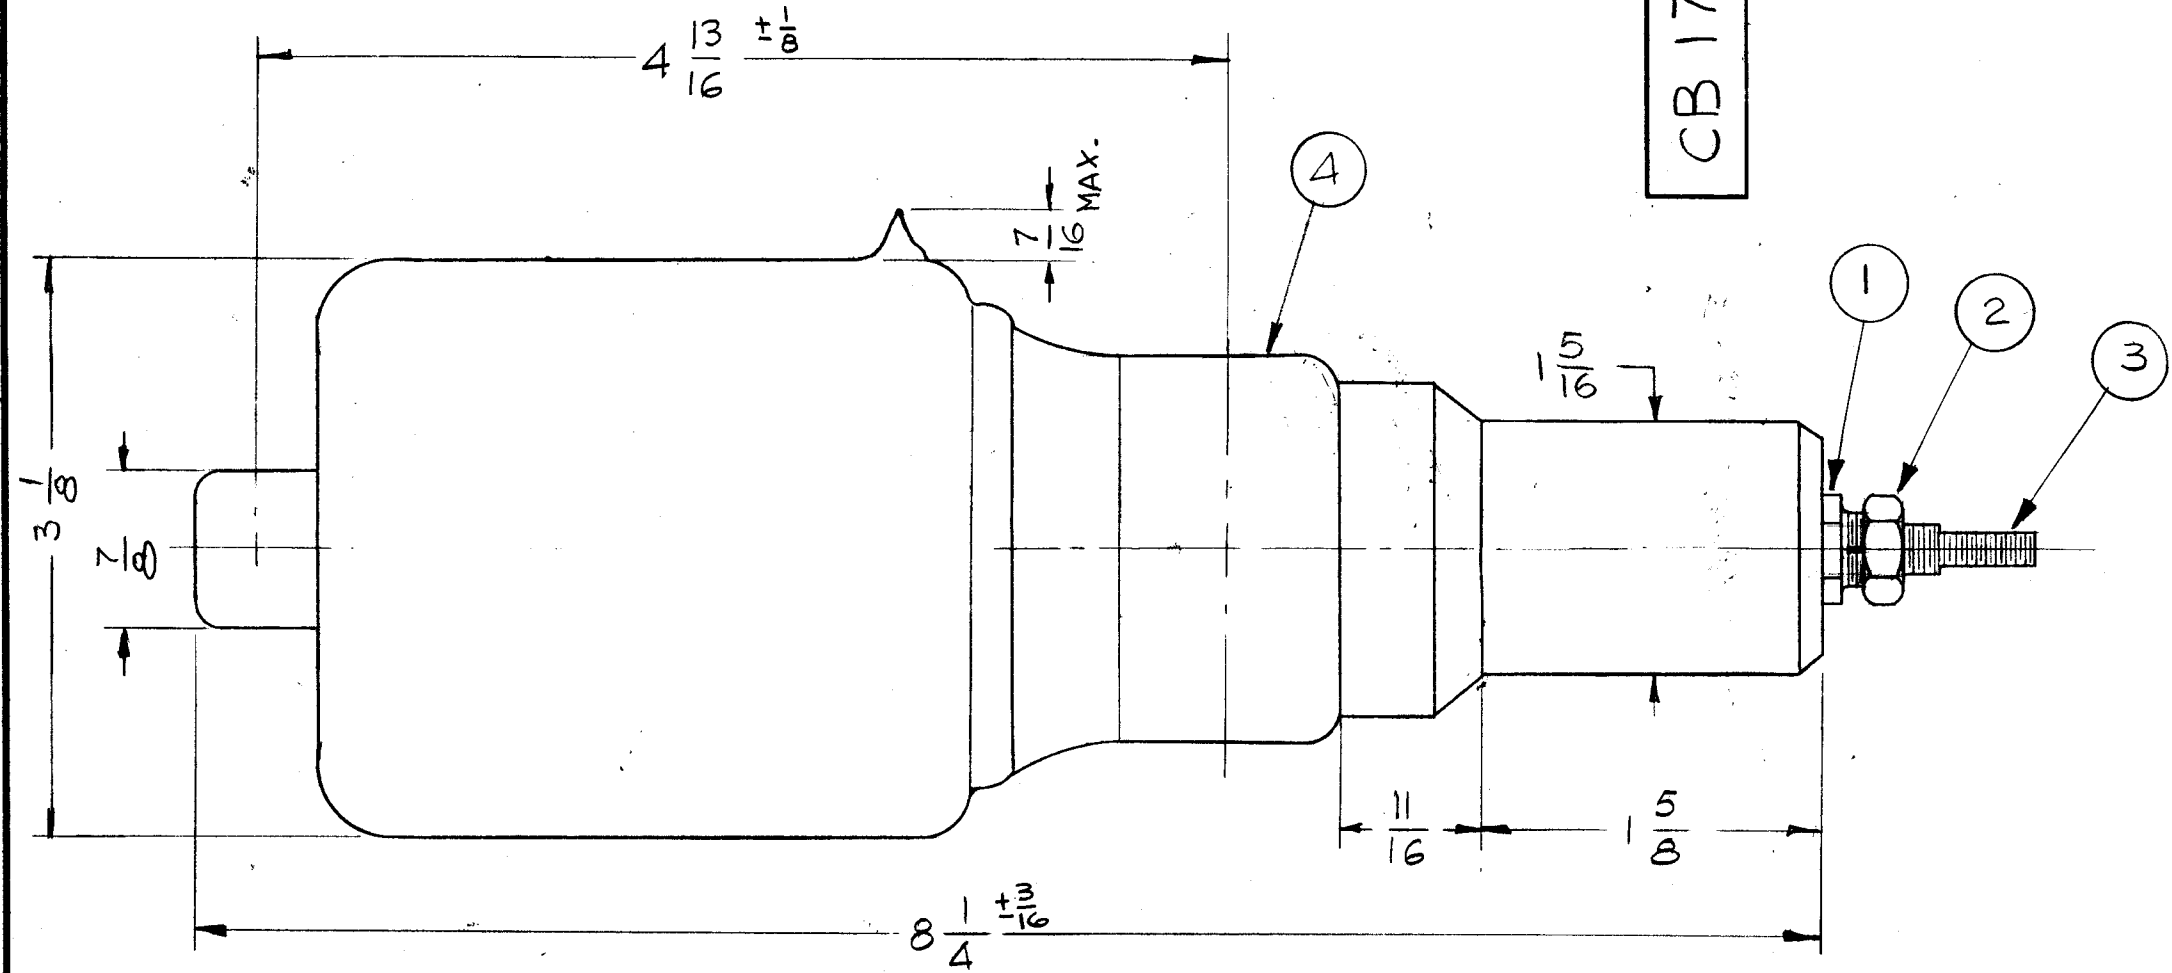

— ELECTRICAL SPECIFICATIONS —  
 SET FOR MAX. STOP C = 270  $\mu$ fd  $\pm$  5%  
 MIN STOP SET FOR 35  $\mu$ fd  $\pm$  5%.  
 VOLTAGE AVAILABLE:  
 VOLTAGE PEAK 7.5KV  
 CURRENT RATING- 42 AMPS  
 RMS (AT 75°F AT 22MC AT RATED  
 VOTAGE.)

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
1	4	CB136-400-7.5-A	CAPACITOR, VARIABLE, VACUUM	
1	3	PM1013	SHAFT, CAPACITOR ADJUST	
1	2	NT148	NUT, SHAFT LOKING	
1	1	PM1011	BUSHING, SHAFT	

F. BUDETTI		LIST OF MATERIAL	
MATERIAL	///	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
FINISH	///	TITLE CAPACITOR, VARIABLE VACUUM	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN G.D.L.	DATE 6-29-64
		CHECKED @	DATE 6-30-64
		ELECT. DES. J.B.	DATE 6-30-64
		MECH. DES. B.C.	DATE 6-30-64
		FINAL APPROVAL R.L. CB170	
		DATE	
		REV. LTR. B	

Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
1	GPT-200K	
SCALE	CODE	
1-1	A	

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

NOTES