


REQ. PER UNIT		USED ON		CI138	
MFG. P/N		ASSY. NO.		DATE	
52-6118-16		VLRB-1		10-21-64	

TMC P/N	MFG. P/N	CORE MATERIAL	FREQ. RANGE	APPROX TEST FREQ*	PERM TOL.	TEST COIL*
CI138-1	52-6118-16	CARBONYL H.P.	100KC-1500KC	141 KC	±2%	6D

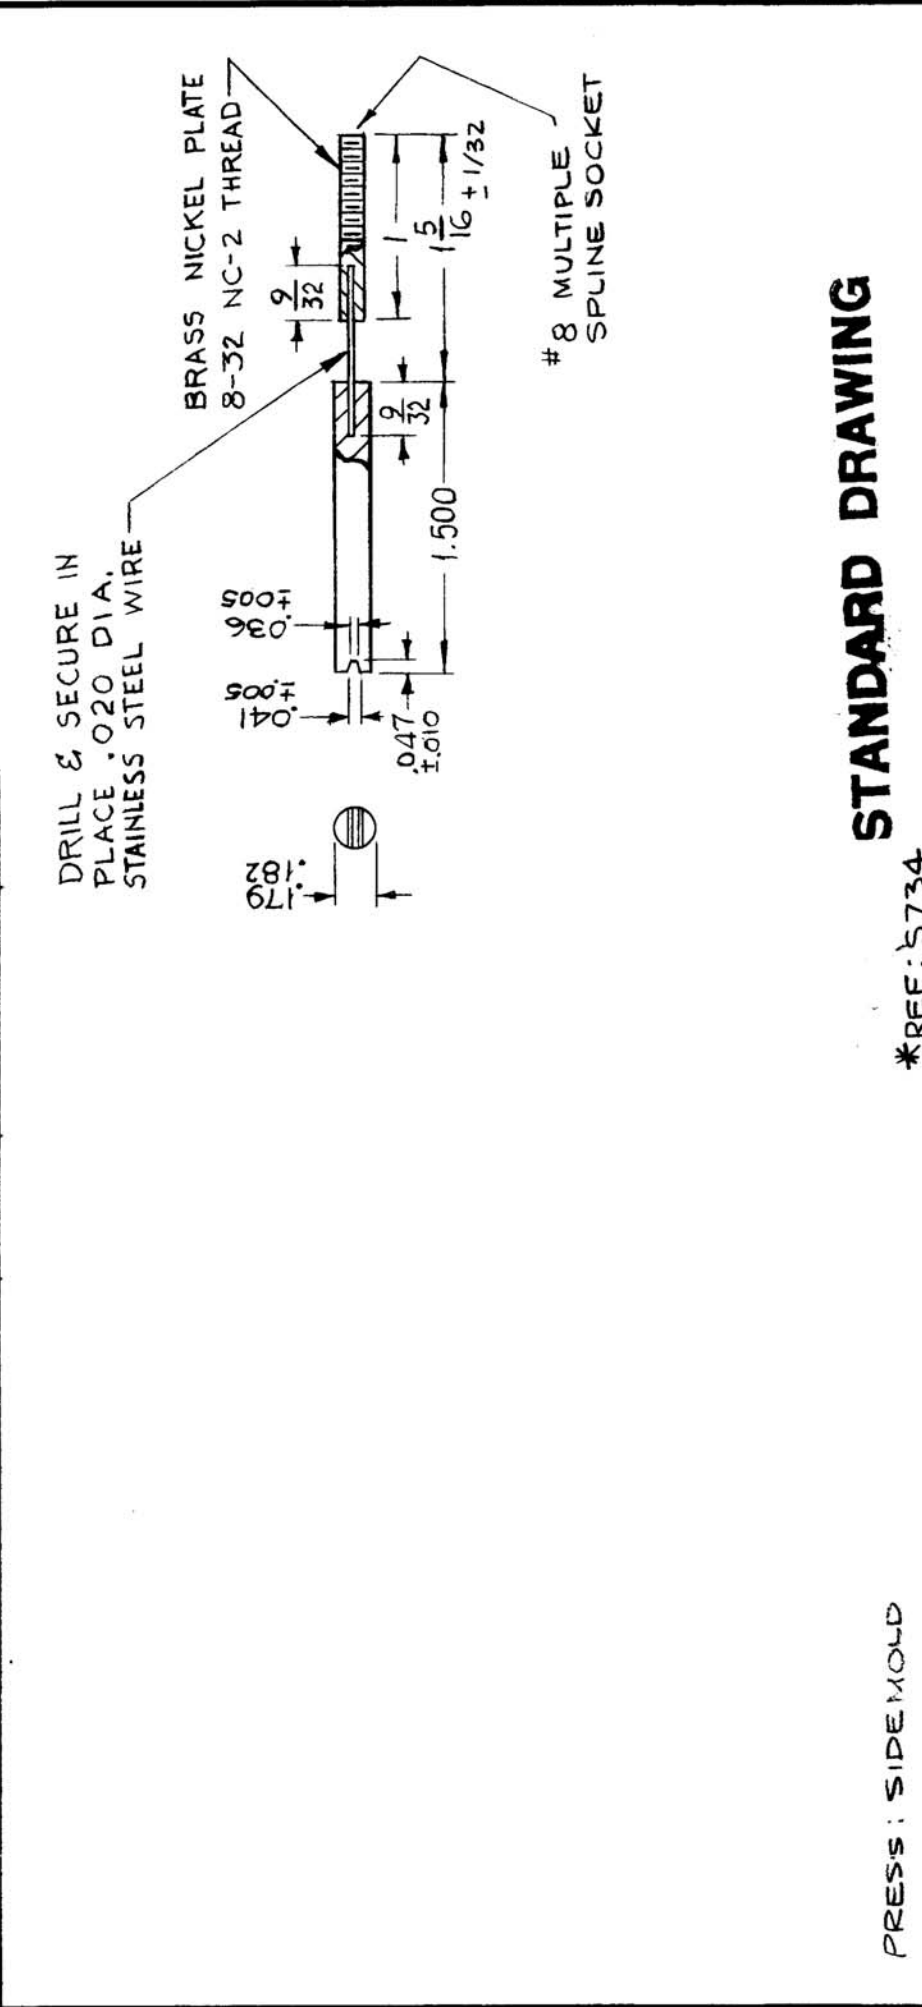

STANDARD DRAWING

*REF: 5734

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		0 POSE	
STOCK SIZE		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
MATERIAL		CORE, FLEXIBLE INSERT	
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED
FINISH & SPEC. NO.		FINAL APPROVAL	
		SRG	CI138
SCALE		1:1	
DATE		10-21-64	
CH. NO.		DRAFTS	
CHECKER		ENG. APP.	
CODE		S401-330 (52-6118-16)	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			
TOLERANCES			
FRACTIONS ± 1/64 ANGLES ± 0° 30'			
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005			

PRESS: SIDE MOLD