


REVISIONS						
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD
		ORIGINAL RELEASE FOR PRODUCTION	1-23-66		SC	EME
		A MODEL WAS PTE-4				

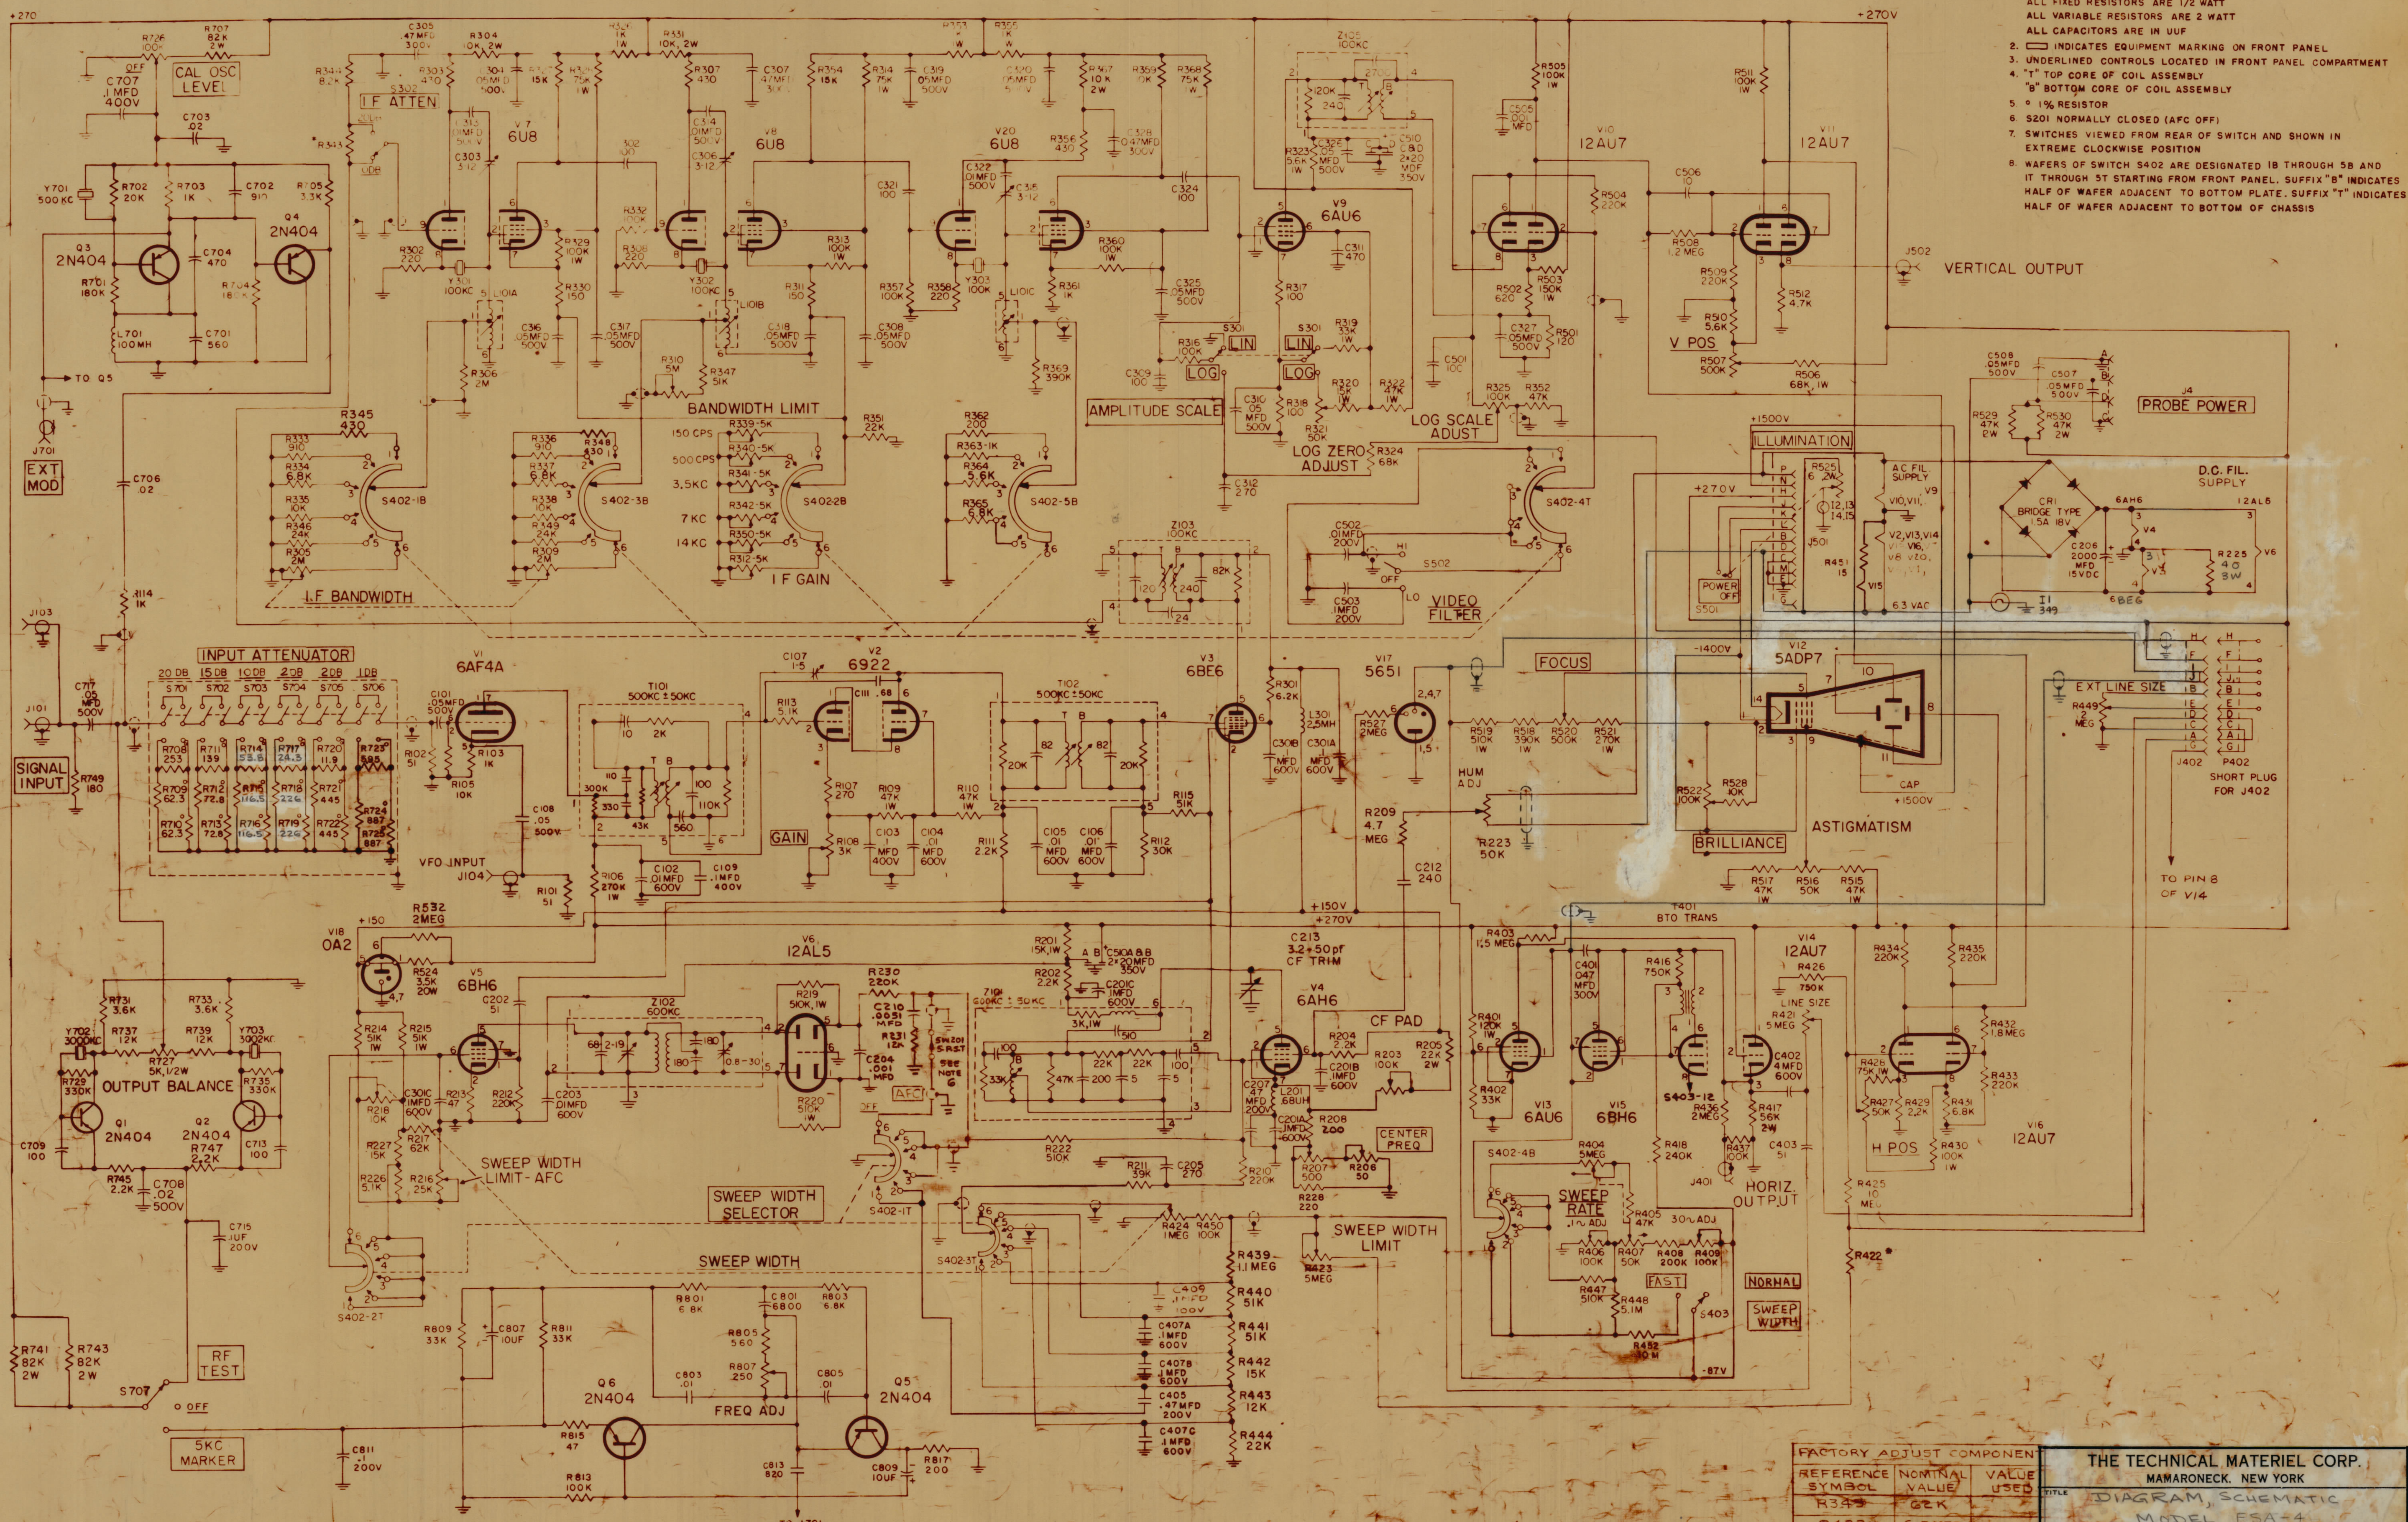

- UNLESS OTHERWISE SPECIFIED:
ALL FIXED RESISTORS ARE 1/2 WATT
ALL VARIABLE RESISTORS ARE 2 WATT
ALL CAPACITORS ARE IN UUF
- INDICATES EQUIPMENT MARKING ON FRONT PANEL
- UNDERLINED CONTROLS LOCATED IN FRONT PANEL COMPARTMENT
- "T" TOP CORE OF COIL ASSEMBLY
"B" BOTTOM CORE OF COIL ASSEMBLY
- ° 1% RESISTOR
- S201 NORMALLY CLOSED (AFC OFF)
- SWITCHES VIEWED FROM REAR OF SWITCH AND SHOWN IN EXTREME CLOCKWISE POSITION
- WAFERS OF SWITCH S402 ARE DESIGNATED 1B THROUGH 5B AND IT THROUGH 5T STARTING FROM FRONT PANEL. SUFFIX "B" INDICATES HALF OF WAFER ADJACENT TO BOTTOM PLATE. SUFFIX "T" INDICATES HALF OF WAFER ADJACENT TO BOTTOM OF CHASSIS

REFERENCE SYMBOL	NOMINAL VALUE	VALUE USED
R345	62K	
R422	6.8 MEG	

THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
TITLE: DIAGRAM, SCHEMATIC MODEL FSA-4			
DRAWN	DATE	FINAL APPROVAL	DATE
CK1095	2-15-66		
CHECKED	DATE		
	2-16-66		
MECH. DES.	DATE		
SHEET	REV. LTR.		
CK1095	A		