


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
Ø		REL TO PROD	DEC 18/68		4P		

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
------	------	----------	-------------	--------

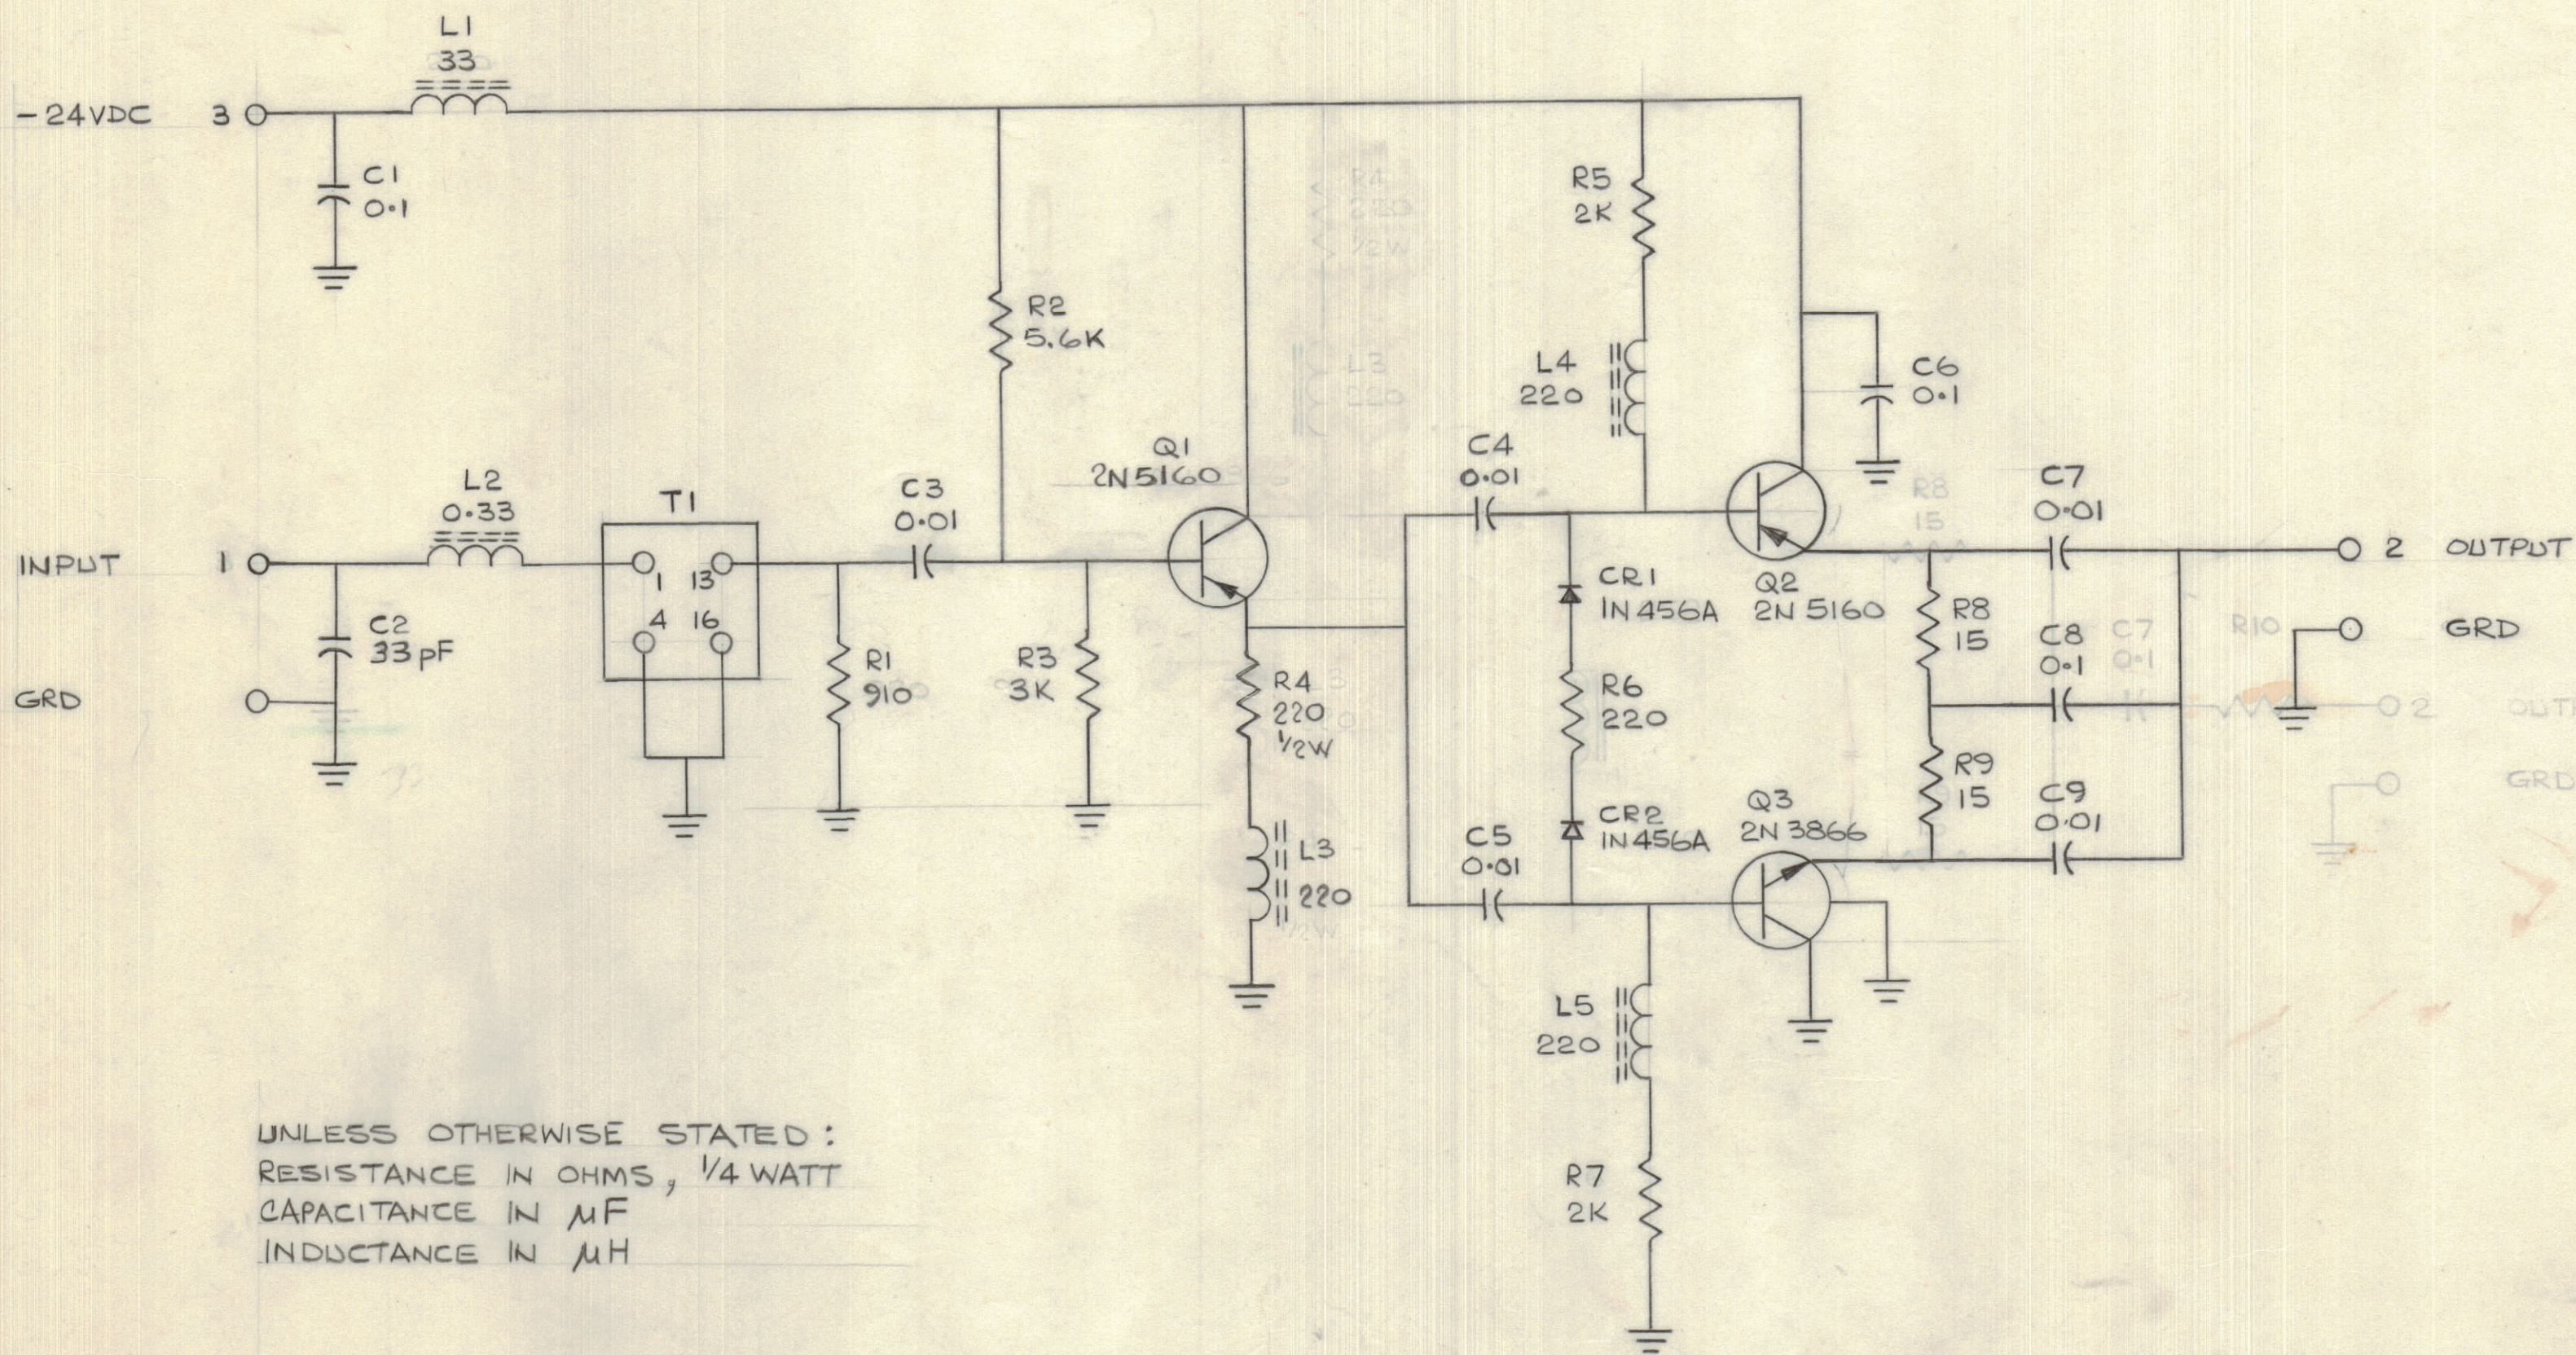

CK 10690 Ø

UNLESS OTHERWISE STATED:  
 RESISTANCE IN OHMS, 1/4 WATT  
 CAPACITANCE IN MF  
 INDUCTANCE IN MH

TOLERANCES		SCALE:	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.
ALL OTHERS	DEC. DIM. ± .05 FRAC. DIM. ± 1/34 ANGULAR DIM. ± 0° 30'		

MODEL	PROJECT NO.	ASS'Y. NO.	DATE
AMC 32	74/68		30 Nov 68
USED ON			

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		SCHEMATIC	
WEIGHT PER PC.		PREAMPLIFIER (70Ω I/P)	
TYPE & TEMPER	DRAWN	KA 14	MECH. DES. APP.
HEAT TREAT. SPEC.	CHECKED	SIMPSON	ELEC. DES. APP.
FINISH & SPEC. NO.		FINAL APPROVAL	
		CK 10690 Ø	