


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
A		REDRAWN WITH CHANGE AS PER CEMN	6 APR 69	472			

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
------	------	----------	-------------	--------

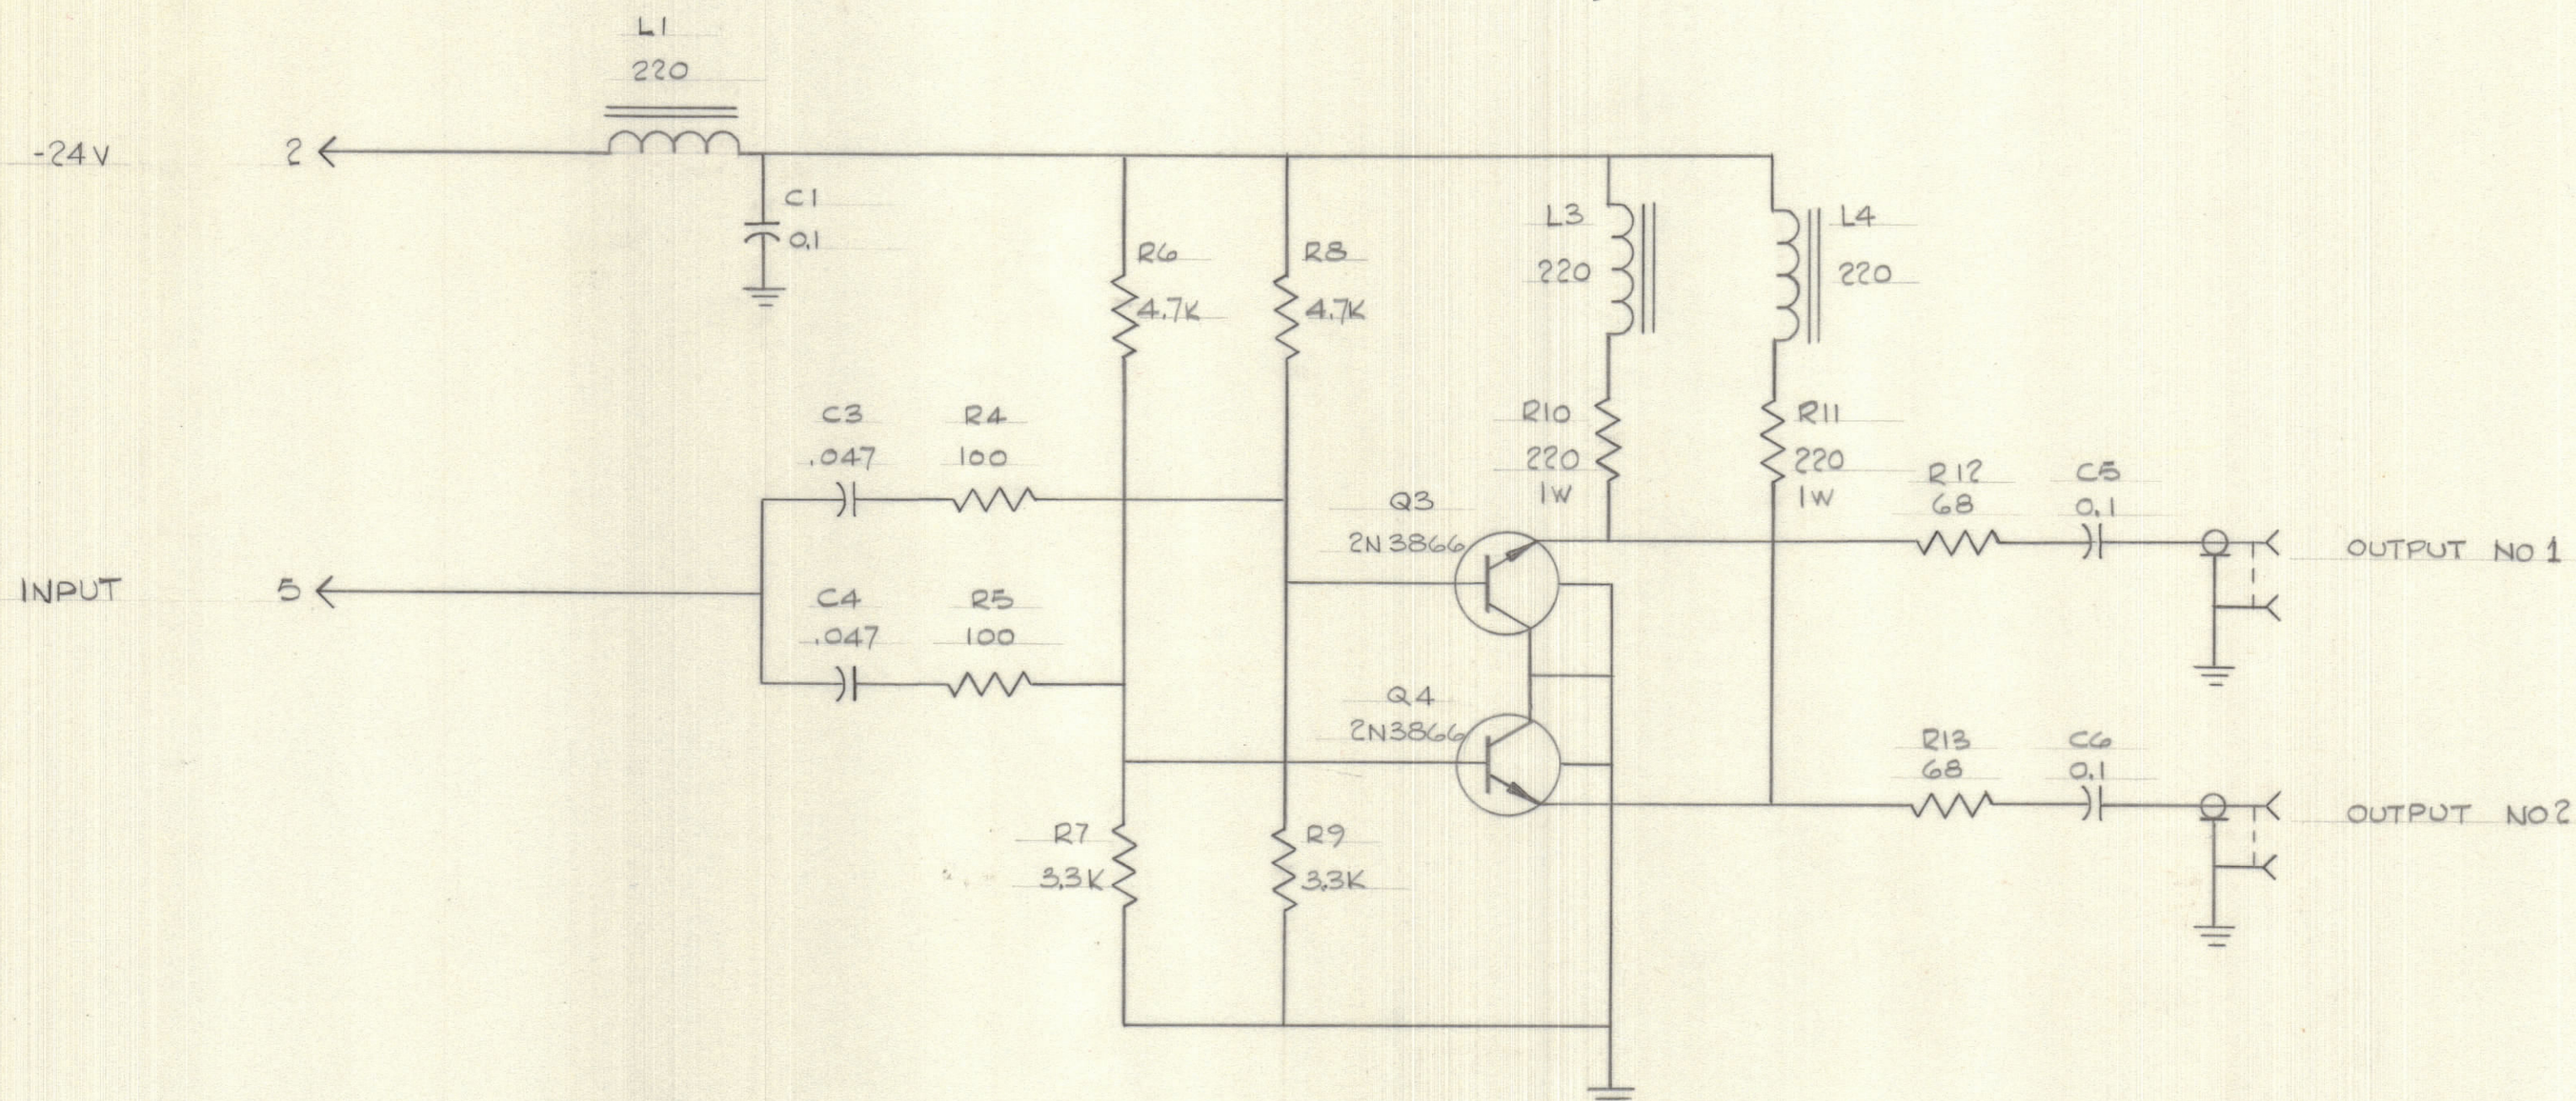

CK10698 A

1. UNLESS SPECIFIED OTHERWISE,  
 RESISTANCE IN OHMS, .25 WATT  
 CAPACITANCE IN  $\mu$ F  
 INDUCTANCE IN  $\mu$ H  
 NOTES:-

TOLERANCES		SCALE:
ALL OTHERS	DEC. DIM. $\pm \frac{1}{64}$ FRAC. DIM. $\pm \frac{1}{64}$ ANGULAR DIM. $\pm 0^{\circ}30'$	.X=.05 .XX=.01 .XXX=.005
DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.		

AX 10056	070/68	25 FEB 69
MODEL	PROJECT NO.	DATE
USED ON		

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		SCHEMATIC	
WEIGHT PER PC.		OUTPUT MODULE 702	
TYPE & TEMPER	AP	K.H.	
DRAWN			
HEAT TREAT. SPEC.	CHECKED	FINAL APPROVAL	
FINISH & SPEC. NO.		CK10698 A	