

IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.


DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.

REQ	ITEM	PART NO.	DESCRIPTION	SYMBOL
-----	------	----------	-------------	--------

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
0	A	REL TO PROD CHANGE PER CEMN	27 AUG 69	534	RR		
	B	REV PER CEMN	9 MAR 1972	1167	CC	UAT	

CK10714 B

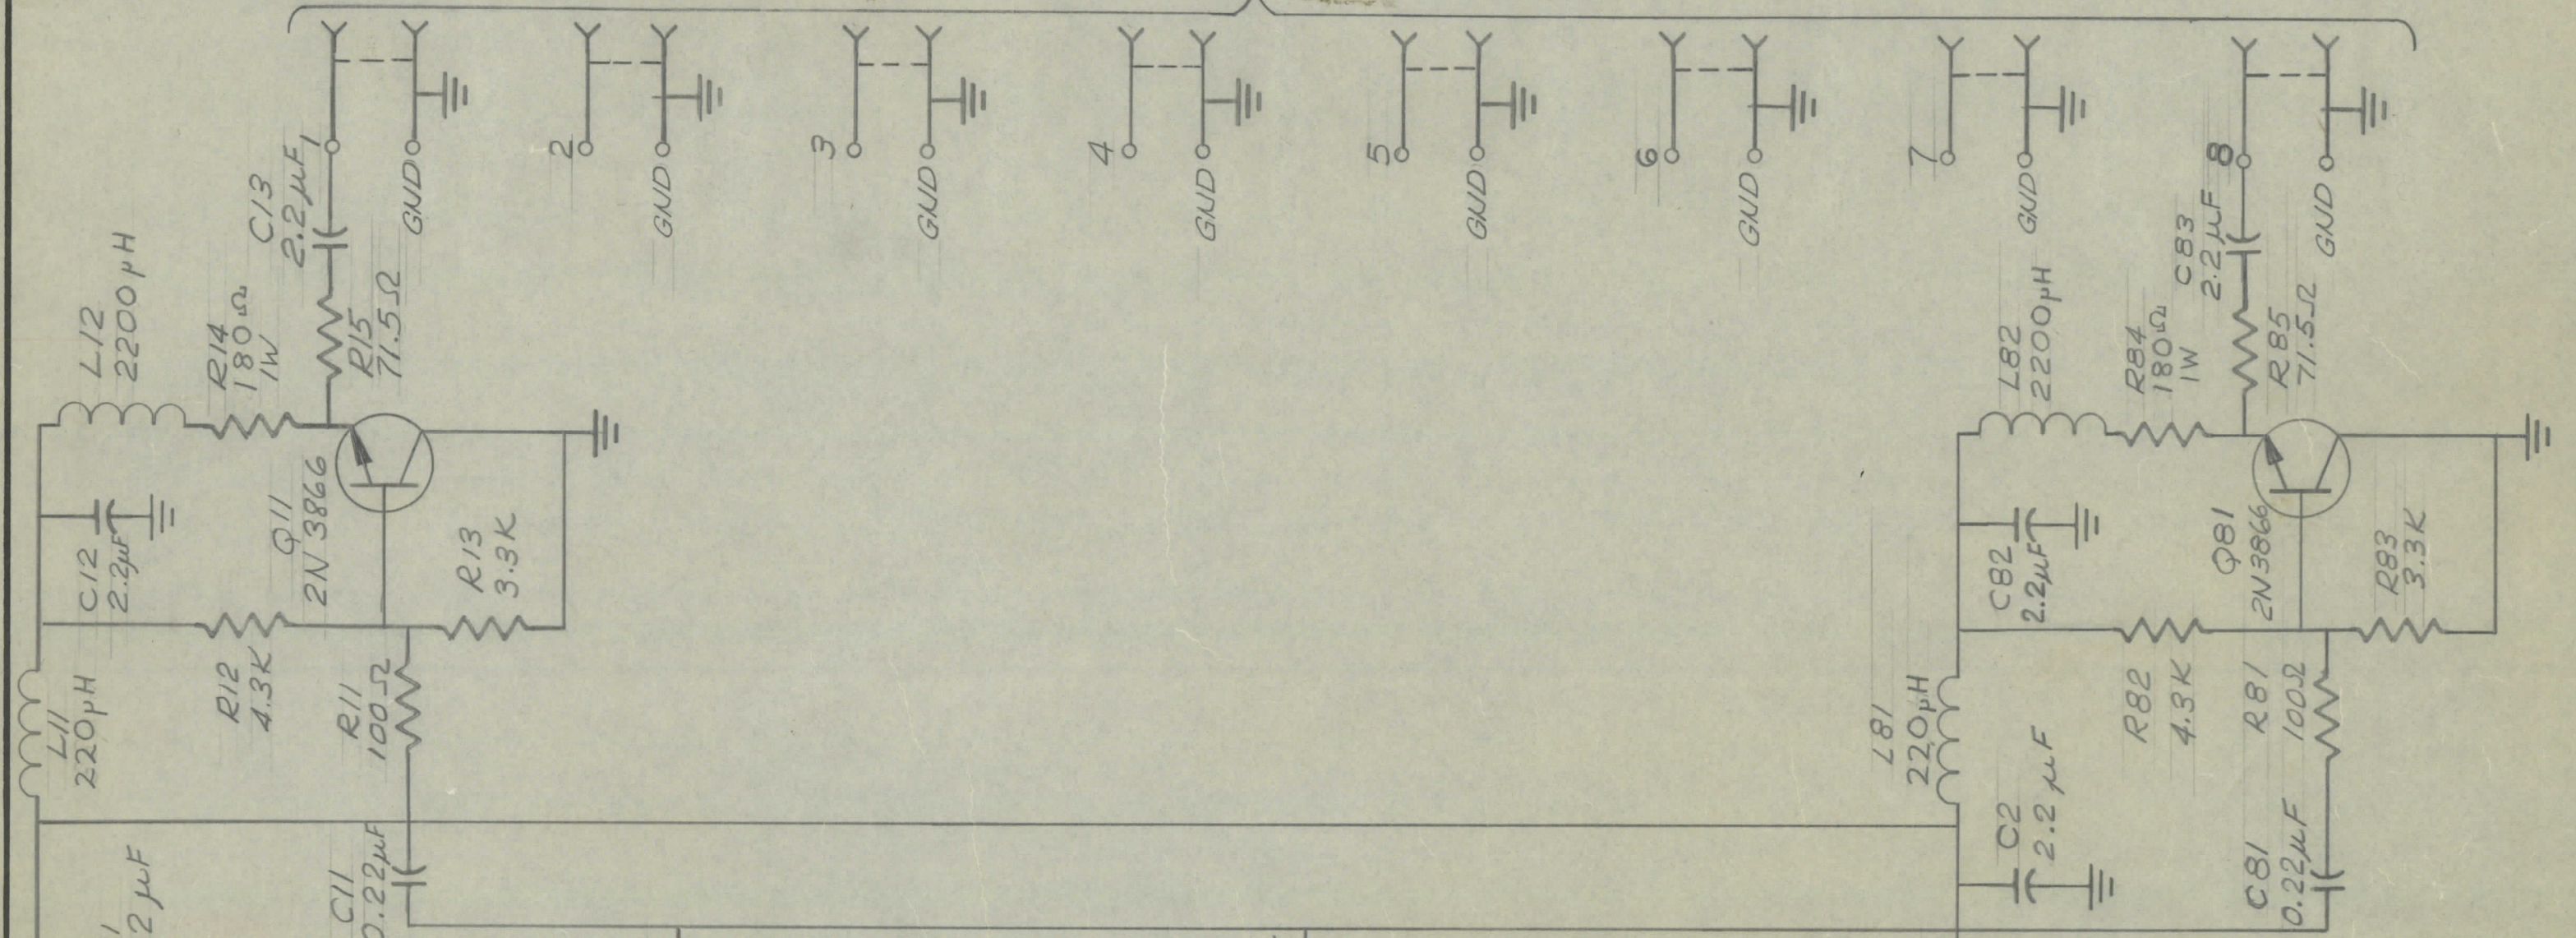

OUTPUT

INPUT 10 INPUT 11

2. R15 & R85 TO BE 52.3 Ω FOR A10791-6
 INDUCTANCE IN MICROHENRIES
 CAPACITANCE IN MICROFARADS
 RESISTANCE IN OHMS

1. UNLESS OTHERWISE STATED:

NOTES

12 -27 VDC

TOLERANCES UNLESS OTHERWISE SPECIFIED	SCALE:
ALL OTHERS	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.
DEC. DIM. ± 1/64	
ANGULAR DIM. ± 0°30'	
.X = .05	
.XX = .01	
.XXX = .005	

MODEL	PROJECT NO.	ASSY. NO.	DATE
LMC 8232 75 Ω		A 10791-5	
LMC 8232 50 Ω		A 10791-6	JULY 15/69

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		SCHEM. DIAG 8-OUTPUT LOW FREQUENCY MULTICOUPLER	
WEIGHT PER PC.		AD	
TYPE & TEMPER		DRAWN: J. Wall ELEC. DES. APP. MECH. DES. APP.	
HEAT TREAT SPEC.		CHECKED: J. Wall FINAL APPROVAL	
FINISH & SPEC. NO.		CK10714 B	

USED ON