


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
Ø		PROD RELEASE	6 APR 1970				
A		REV AS PER CEMN	25 JUN 70	808			

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
------	------	----------	-------------	--------

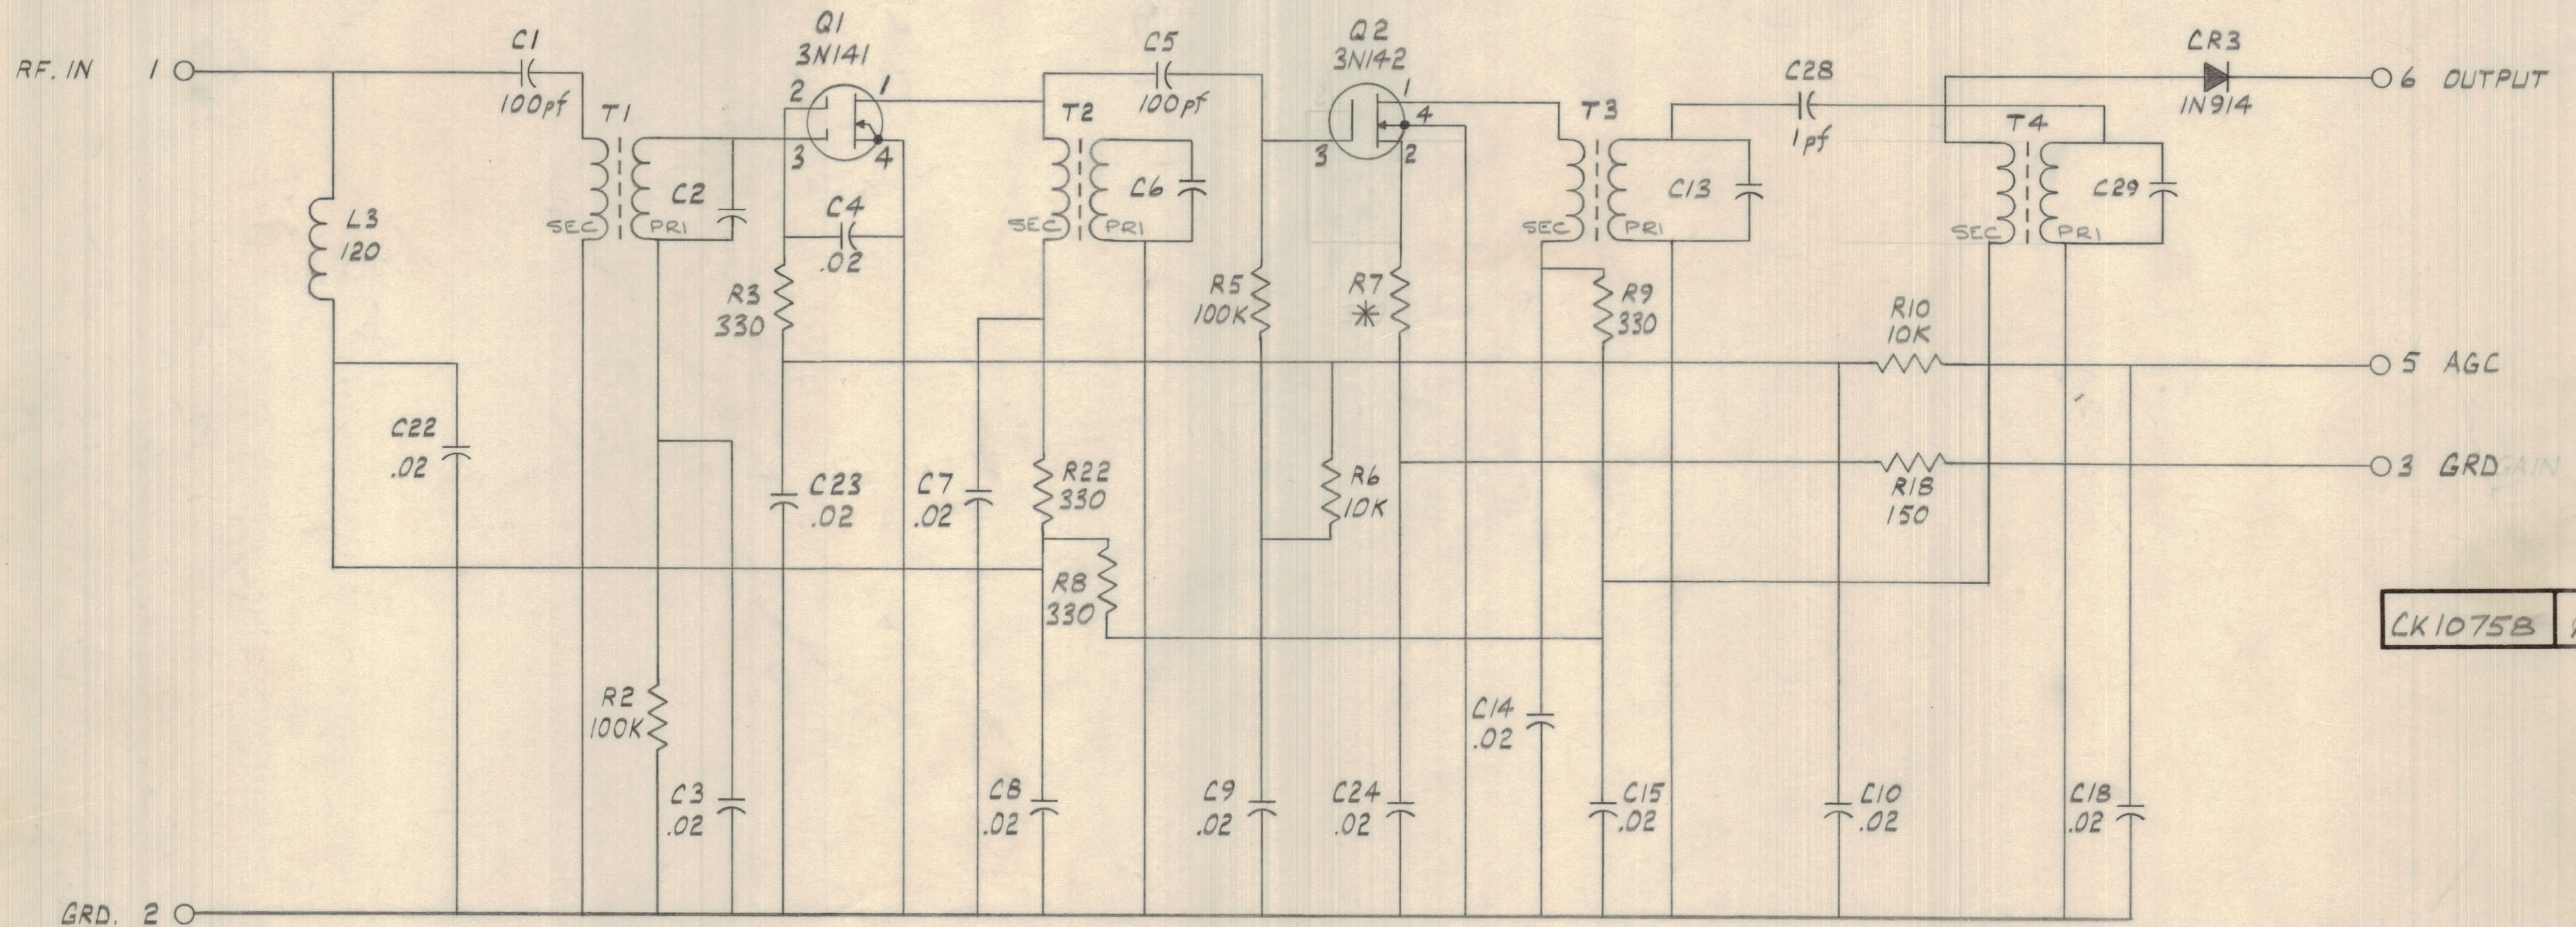

CK1075B A

* SEE NOTE 3.

LAST COMPONENT NUMBER USED.		
R22	C29	L3
T4	CR3	Q2

NOTES. 1. UNLESS OTHERWISE STATED -
 ALL RESISTANCE VALUES IN OHMS.
 ALL CAPACITANCE VALUES IN MICRO FARADS.
 ALL INDUCTANCE VALUES IN MICRO HENRIES.
 2. VALUES OF C2, C6, C13 & C29 ARE DEPENDENT ON FREQUENCY BAND.
 3. VALUE OF R7 SELECTED ON TEST.

REF. A10790-14
 A10790-15

ALL COMPONENTS ARE 100 SERIES

TOLERANCES		SCALE:
ALL OTHERS	DEC. DIM. ± .015 FRAC. DIM. ± 1/64 ANGULAR DIM. ± 0° 30'	.X = .05 .XX = .01 .XXX = .005
		DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

MTR	087/70	SEE ABOVE	16 JAN 70
MODEL	PROJECT NO.	ASS'Y. NO.	DATE

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		SCHEMATIC DIAGRAM	
WEIGHT PER PC.		REC. RF AMPLIFIER	
TYPE & TEMPER		FEARNLEY	1/4
DRAWN		PROCTOR	
HEAT TREAT. SPEC.		CHECKED	FINAL APPROVAL
FINISH & SPEC. NO.		CK1075B A	