


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
X		ENG RELEASE	16 Dec 71			NAT.	[Signature]

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
------	------	----------	-------------	--------

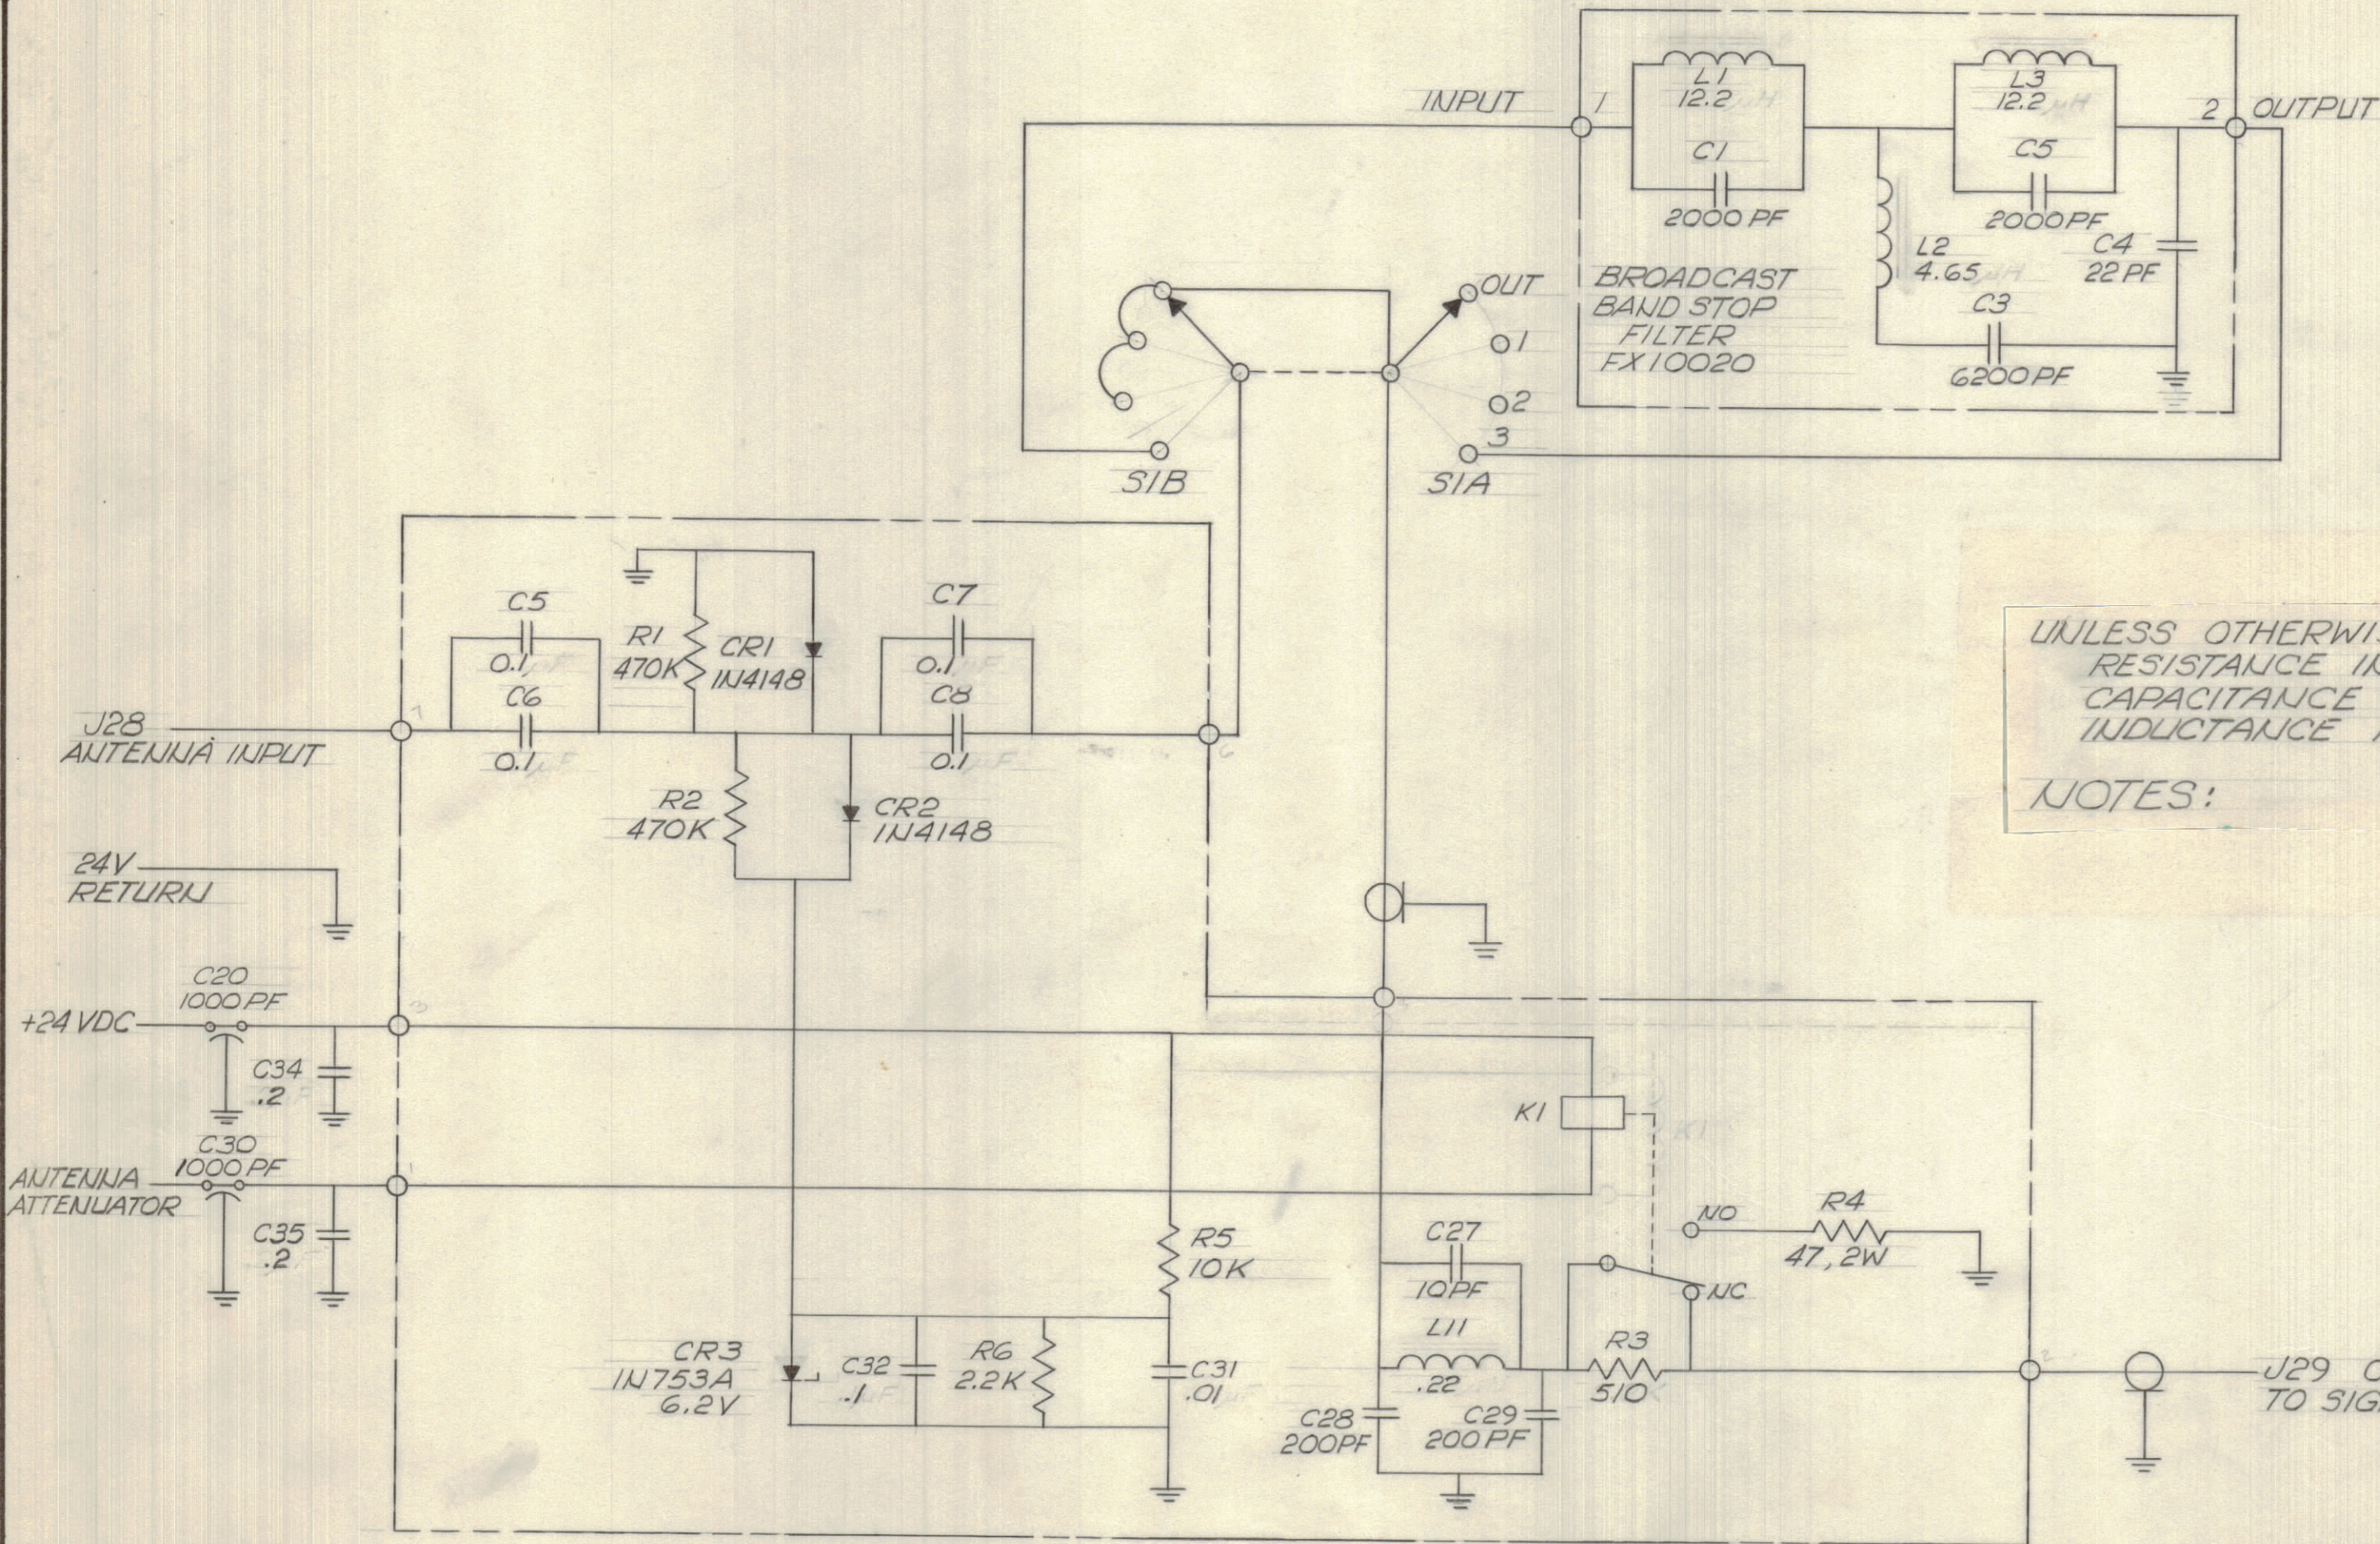

UNLESS OTHERWISE STATED:  
 RESISTANCE IN OHMS, 1/4 WATT  
 CAPACITANCE IN MICROFARADS  
 INDUCTANCE IN MICROHENRIES

NOTES:

CK10837 X

MOD. TO ITT MACKAY MODEL 3020

TOLERANCES		SCALE:	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.
ALL OTHERS	DEC. DIM. ± .05 FRAC. DIM. ± 1/64 ANGULAR DIM. ± 0° 30'	.XX*.01 .XXX*.008	

MODEL	PROJECT NO.	ASSY. NO.	DATE
GPR-110/SRM-5	133/71		26 NOV 71

TMC (Canada) LIMITED OTTAWA ONTARIO			
SCHEMATIC DIAGRAM			
PRESELECTOR ASSEMBLY			
TYPE & TEMPER		U. THOMAS [Signature]	
DRAWN		ELEC. DES. APP. MECH. DES. APP.	
A. PROCTOR [Signature]			
HEAT TREAT. SPEC.		CHECKED FINAL APPROVAL	
FINISH & SPEC. NO.		CK10837 X	