


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.				DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED			
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
0		REL TO PROD	FEB 73			SDW	SDW

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
------	------	----------	-------------	--------

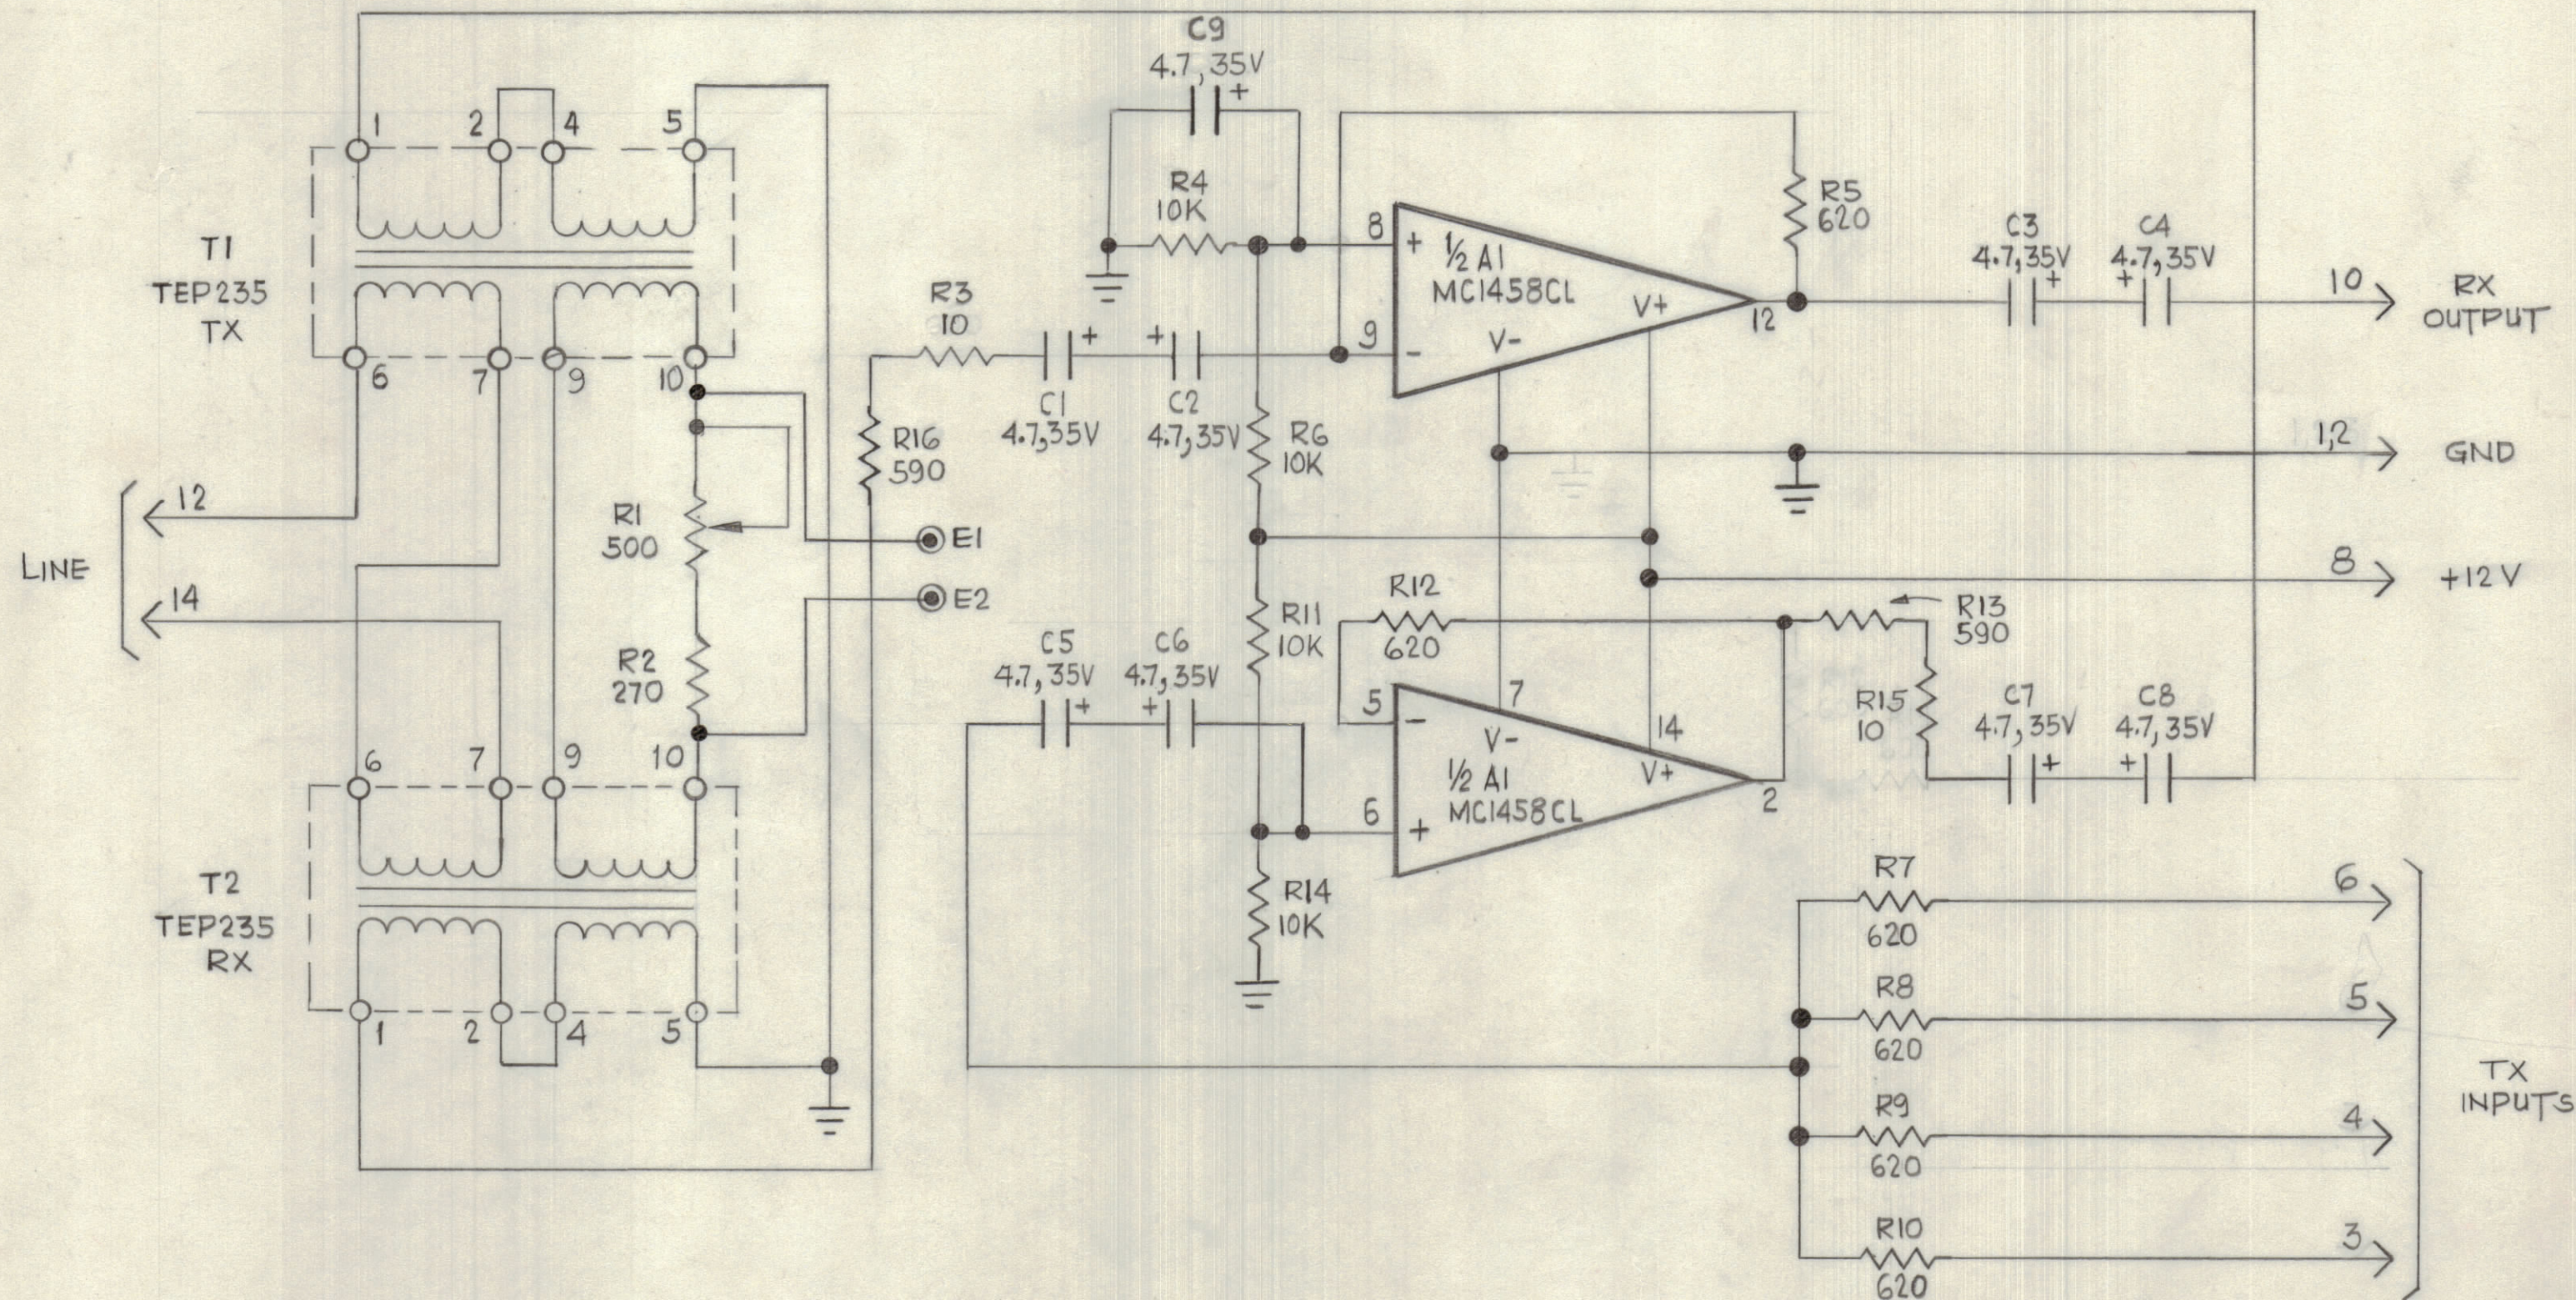

CK10884 0

1. UNLESS OTHERWISE SPECIFIED: -  
RESISTANCE IN OHMS, 1/4 WATT  
CAPACITANCE IN MICROFARADS

NOTES:

TOLERANCES			SCALE:
ALL OTHERS	DEC. DIM. ±	.X = .05	DRILL, PUNCH, COMMERCIAL STOCK
	FRAC. DIM. ± 1/64	.XX = .01	SIZES AND MANUFACTURERS
	ANGULAR DIM. ± 0° 30'	.XXX = .005	TOLERANCES ARE NOT INCLUDED.

RCSR-IT&IR	141/72	A11086-5	16 JAN 72
MODEL	PROJECT NO.	ASSY. NO.	DATE

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		SCHEMATIC DIAGRAM HYBRID CIRCUIT	
WEIGHT PER PC.		drawn	S. WITTEN
TYPE & TEMPER.		DRAWN	ELEC. DES. APP. MECH. DES. APP.
HEAT TREAT. SPEC.		CHECKED	S. WITTEN FINAL APPROVAL
FINISH & SPEC. NO.		CK10884 0	