


REVISIONS							
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
	Ø	ORIGINAL RELEASE FOR PRODUCTION	7/26/66				

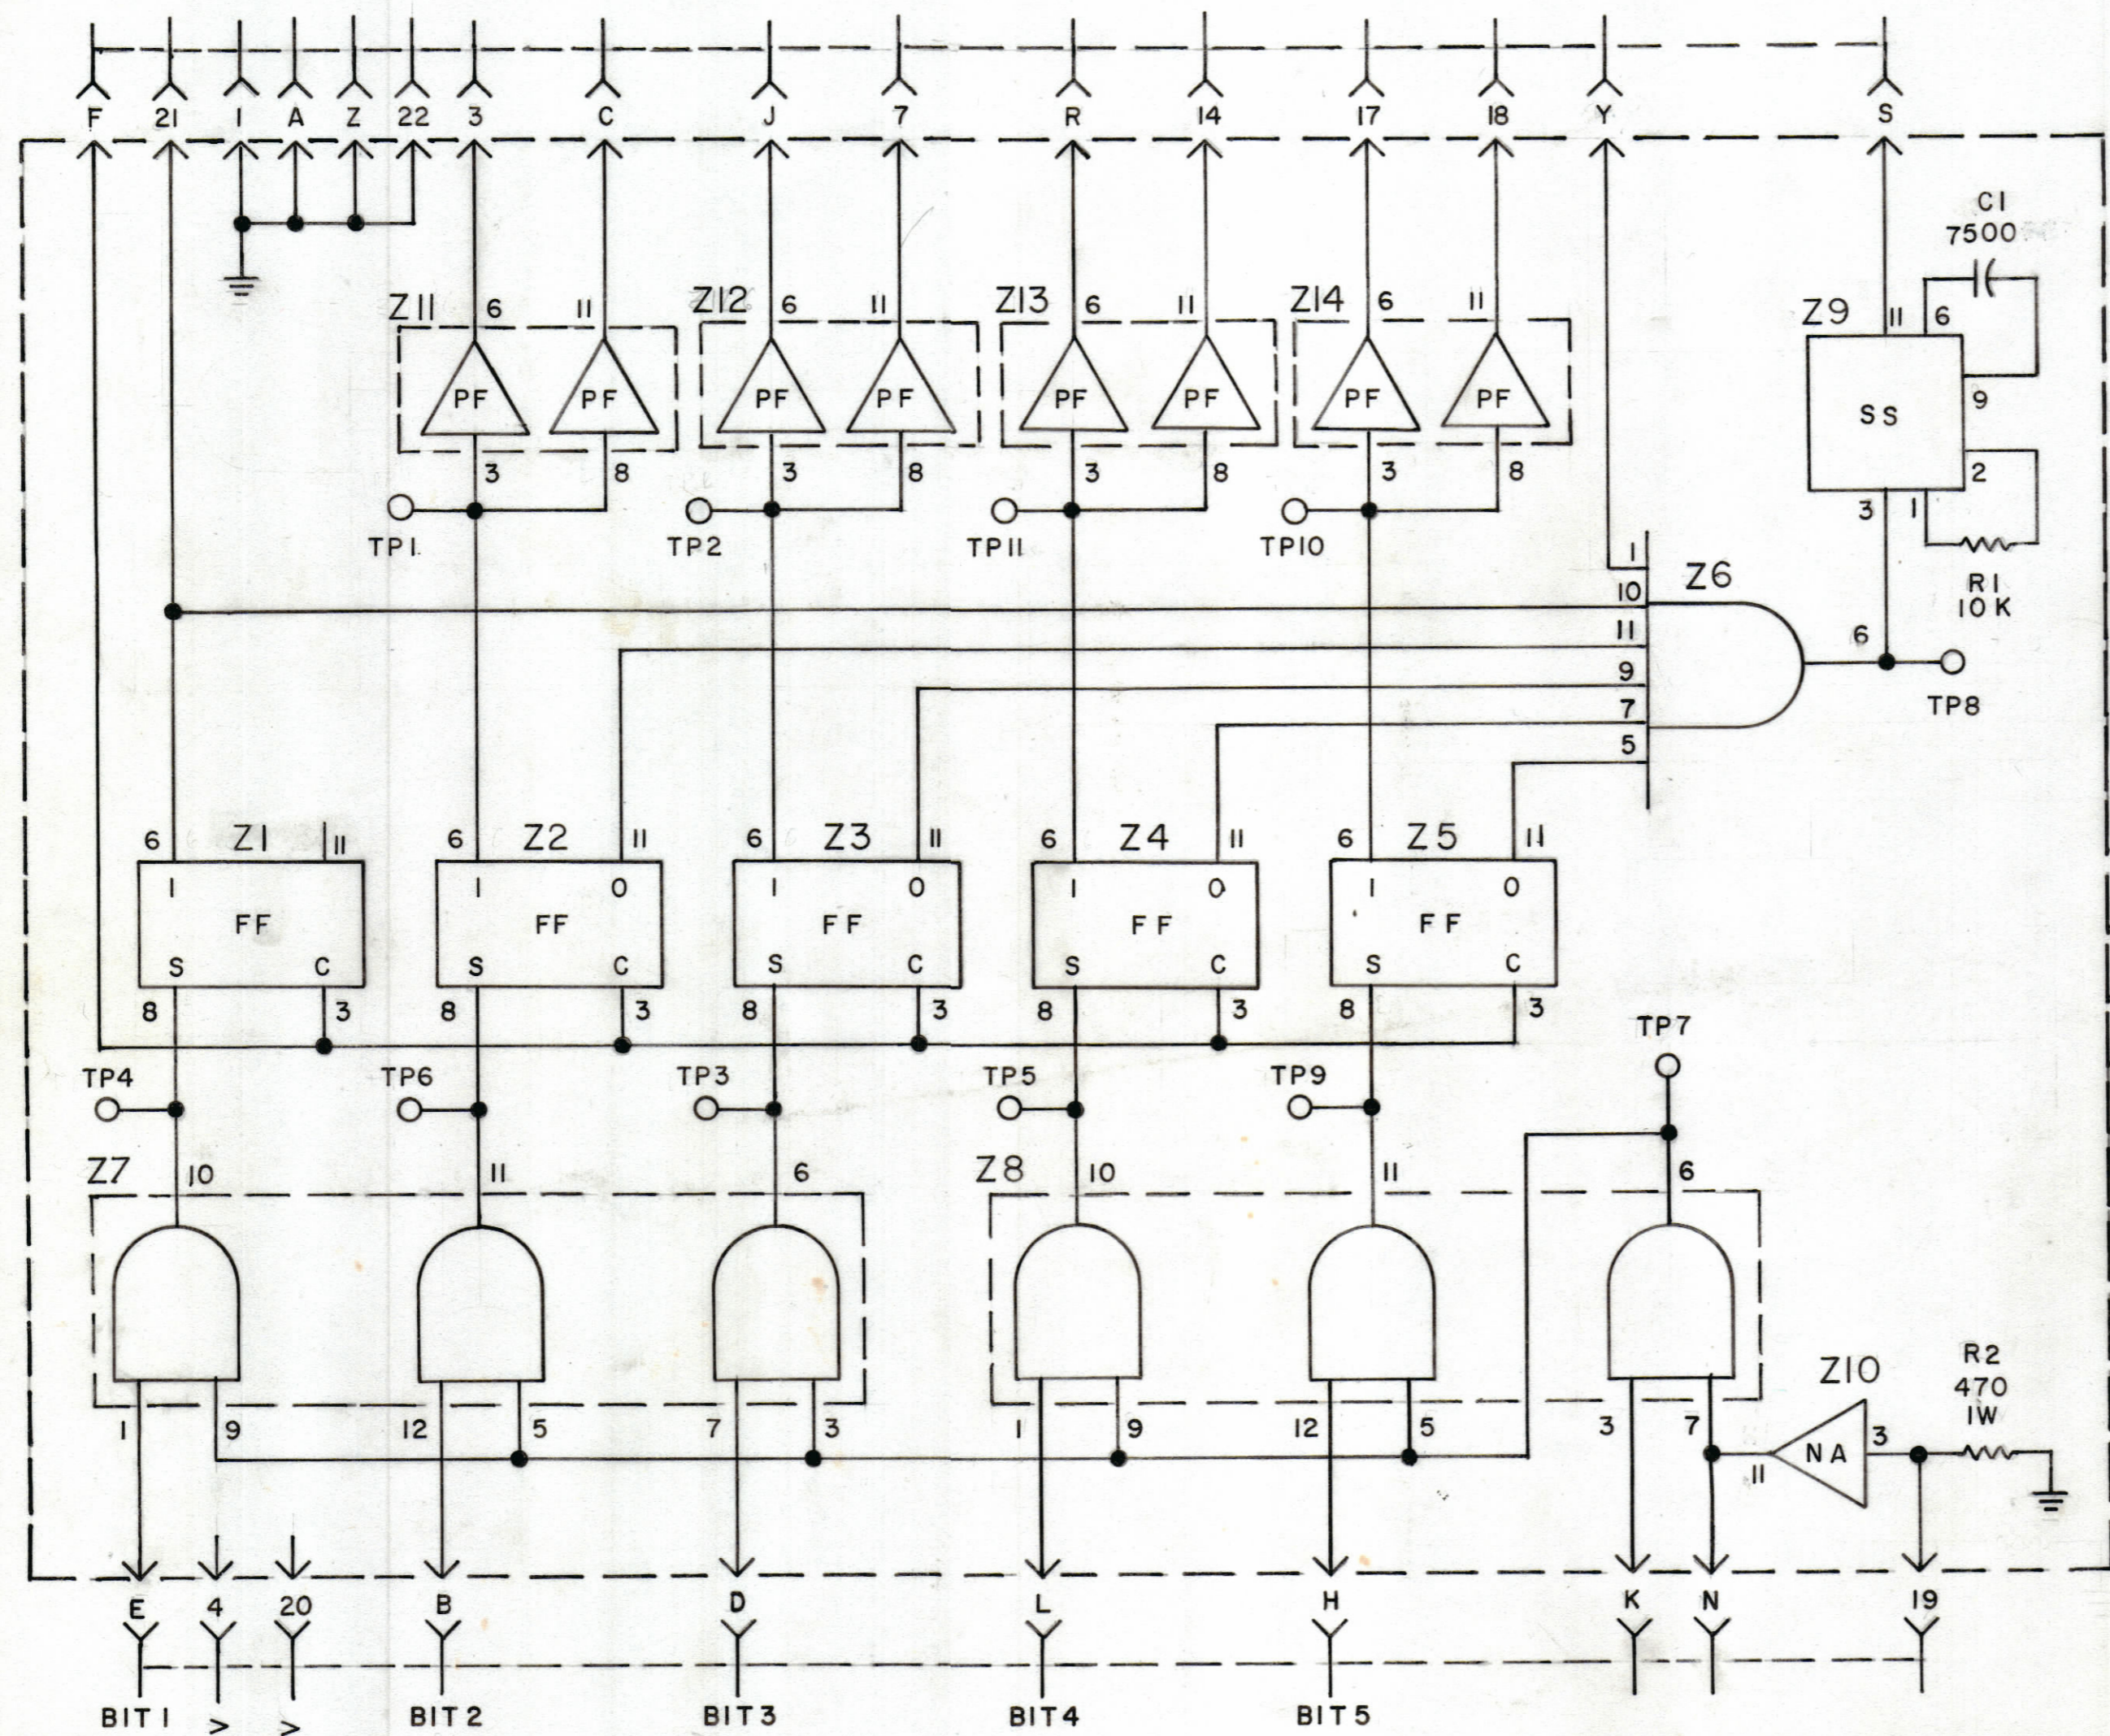

MODULE VOLTAGE & GRD CHART

SYMBOL	PIN CONNECTIONS		
	+12V	-12V	GRD
Z1 THRU Z5, Z9, 10	10	2	5
Z6, 7 & Z8		2	
Z11 THRU Z14		2	5

SEE CHART

UNLESS OTHERWISE SPECIFIED
 1-ALL RESISTOR VALUES ARE IN OHMS 1/2 WATT
 2-ALL CAPACITOR VALUES ARE IN PF.
 3-ON ALL FLIP FLOPS (FF) PIN 6 IS THE "1" OUTPUT & PIN 11 IS THE "0" OUTPUT.

NOTES

RTIH-1		A4398
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE	CODE	
THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.		

REF: PC 264

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
EATON LIST OF MATERIAL				
MATERIAL		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
FINISH		TITLE: DIAGRAM, SCHEMATIC GATING CIRCUIT		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN: J. L.	DATE: 7-1-66	FINAL APPROVAL: [Signature]
DECIMALS: .X ± .05, .XX ± .01, .XXX ± .005		CHECKED: J.L. G.D.L.	DATE: 7/13/66	DATE: 7/25/66
FRACTIONS: ± 1/64, ANGLES: ± 0° 30'		ELECT. DES. [Signature]	DATE: 7/22/66	DATE: 7/25/66
TOLERANCES		MECH. DES. [Signature]	DATE: 7/25/66	DATE: 7/25/66
SHEET			CK1153	REV. LTR.

CK1153