


REVISIONS						
ZONE	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD APPD
X		EXPERIMENTAL RELEASE	2/23-68			
XI		UPDATED \$REV	9/30/68			
Ø		ORIG. RELEASE FOR PROD	10/2/68			
Δ		R16 WAS (1K), CR14 WAS (IN752A)	8/13/69	19517	GE	

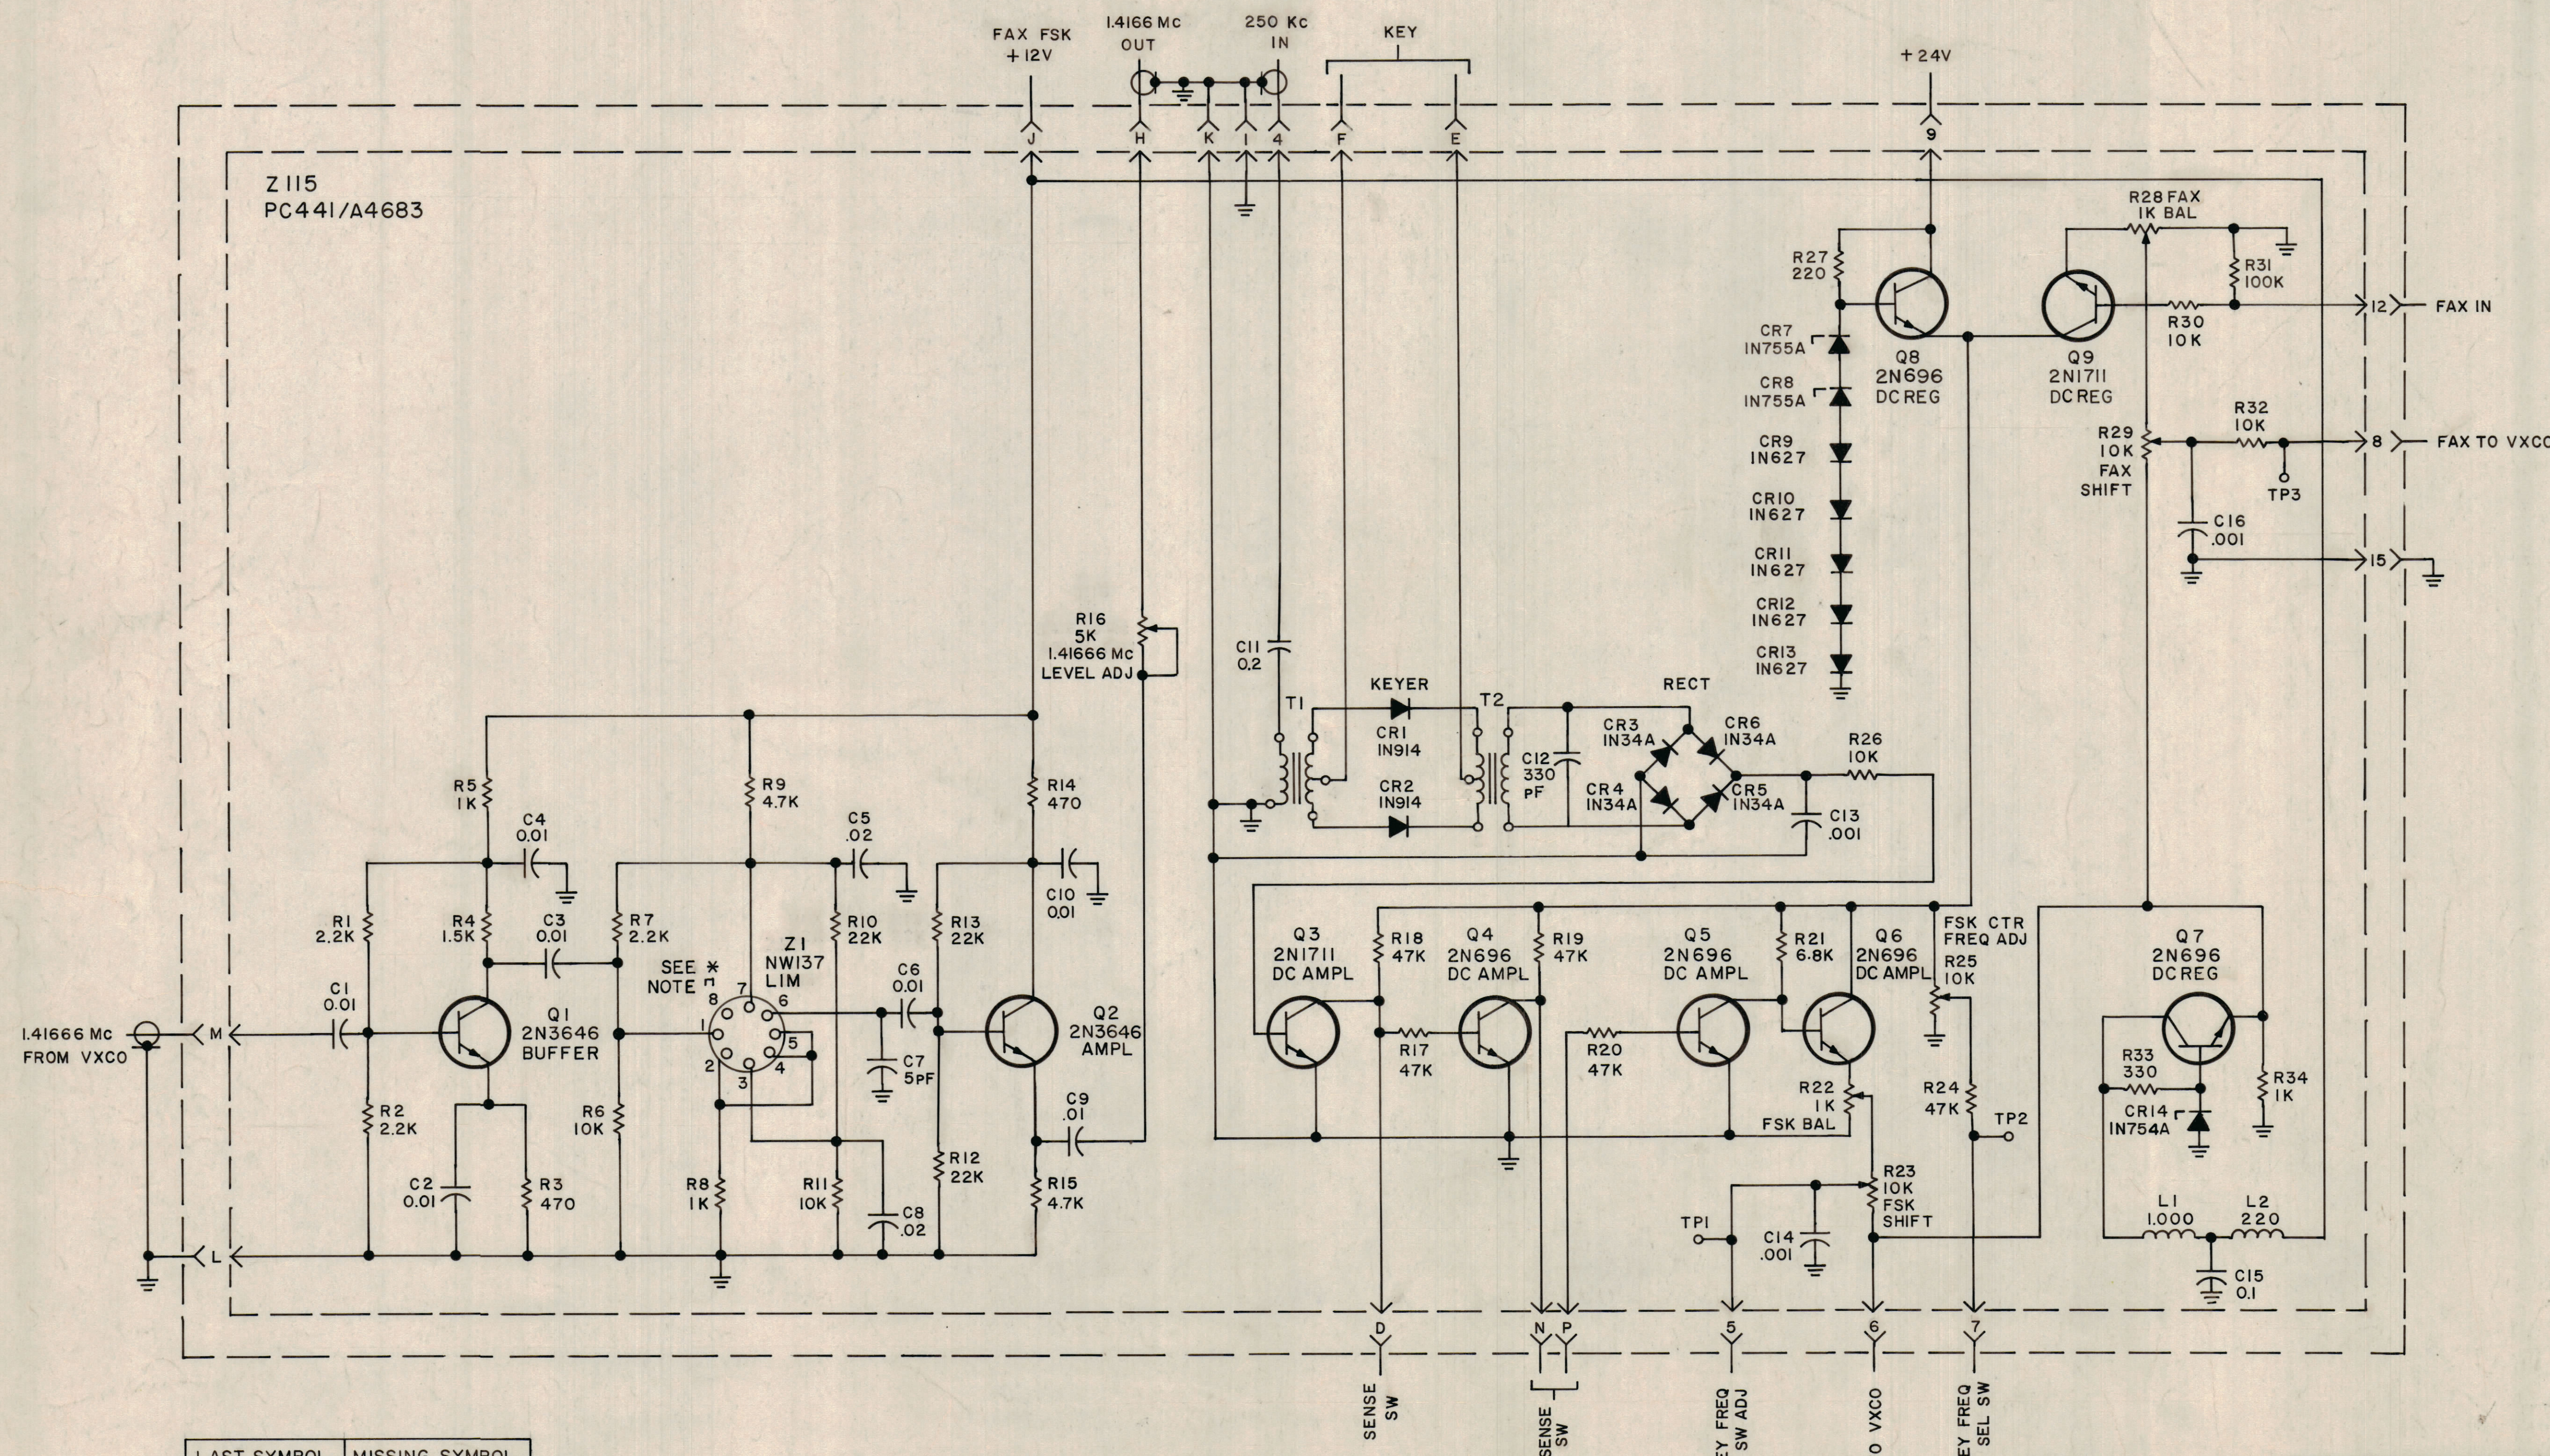

LAST SYMBOL	MISSING SYMBOL
C16	
CR14	
L2	
Q9	
R34	
T2	
TP3	
Z1	

UNLESS OTHERWISE SPECIFIED

1- ALL RESISTANCE VALUES ARE IN OHMS, 1/4W

2- ALL CAPACITANCE VALUES ARE IN MICROFARADS

3- ALL INDUCTANCE VALUES ARE IN MICROHENRIES

*"n" SYMBOL DENOTES FLAT SIGNIFYING PIN 8 ON NETWORK

SYMBOL SERIES 1600

I	SME-6	A4683
QTY / UNIT	MODEL USED ON	ASS'Y NO.
APPLICATION		
CODE		
MATERIAL		
FINISH		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	
TOLERANCES ON	
DECIMALS	FRACTIONS
.X ± .05	± 1/64
.XX ± .01	ANGLES
.XXX ± .005	± 0° - 30'

QTY. REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
LIST OF MATERIAL				
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
DIAGRAM, SCHEMATIC FREQ. SHIFT GEN.				
SIZE	CODE IDENT. NO.	DWG NO.	ISSUE	
D	82679	CK1484	Δ	
SCALE	SHEET			OF

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed herein. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.