


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.
 MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION.
 REMOVE ALL BURRS AND SHARP EDGES

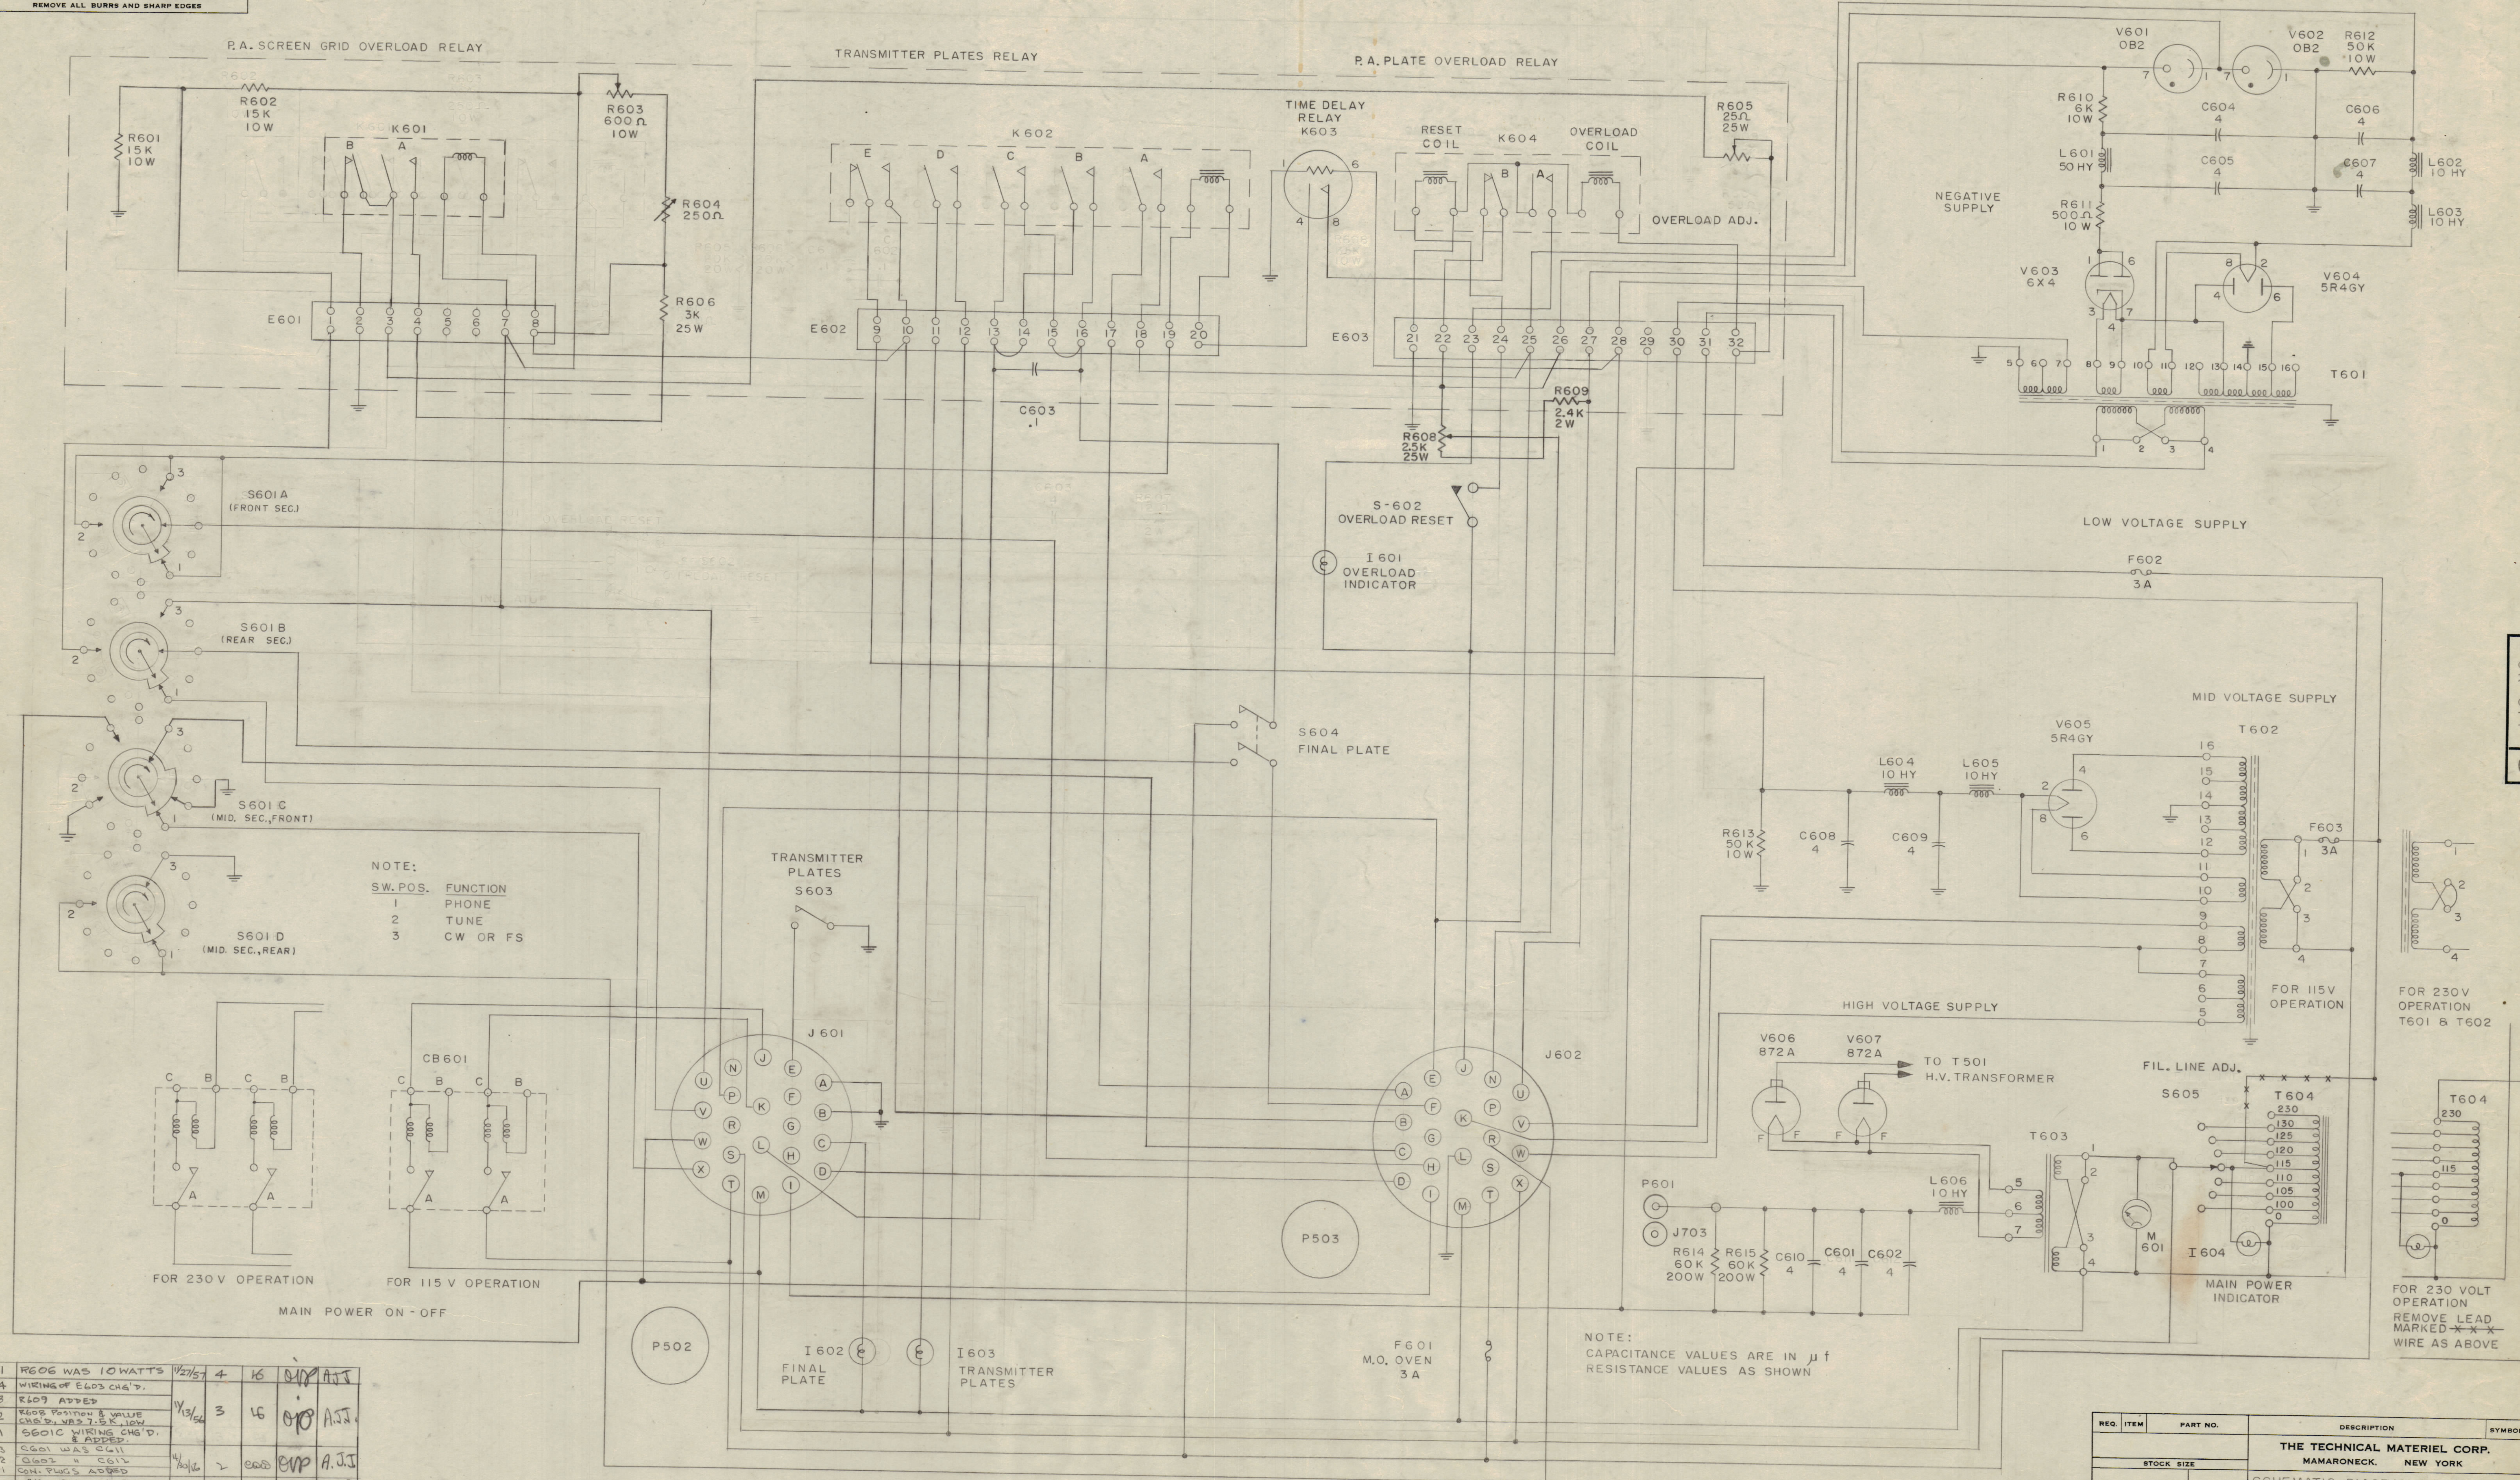

NOTE:
 S.W. POS. FUNCTION
 1 PHONE
 2 TUNE
 3 CW OR FS

NOTE:
 CAPACITANCE VALUES ARE IN μ f
 RESISTANCE VALUES AS SHOWN

| | | | | | | |
|---|---|--|---------|---|----|------------|
| D | 1 | R606 WAS 10WATTS | 1/27/57 | 4 | 16 | W.P.A.S.S. |
| | 4 | WIRING OF E603 CHG'D. | | | | |
| | 3 | R609 ADDED | | | | |
| C | 2 | R602 POSITION & VALUE CHG'D. WAS 7.5K, 10W | 1/3/56 | 3 | 16 | W.P.A.S.S. |
| | 1 | S601C WIRING CHG'D. & ADDED | | | | |
| B | 3 | S601 WAS COIL | | | | |
| | 2 | C602 " " COIL | 4/10/56 | 2 | 16 | W.P.A.S.S. |
| | 1 | COIL TUNGS ADDED | | | | |
| A | 1 | 3K 10W ON R606 ADDED | 2-2-56 | 1 | 16 | W.P.A.S.S. |

| ISSUE | ITEM | CHANGED FROM | DATE | CN. NO. | DRAFTS | CHECKER | ENG. APP. |
|------------|--------------------|---|------|---------|--------|---------|-----------|
| TOLERANCES | | SCALE: | | | | | |
| ALL OTHERS | DEC. DIM. \pm | DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED. | | | | | |
| | FRAC. DIM. \pm | | | | | | |
| | ANGULAR DIM. \pm | | | | | | |

| REQ. ITEM | PART NO. | DESCRIPTION | SYMBOL |
|---|----------|-------------|--------|
| THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK | | | |
| STOCK SIZE | | | |
| MATERIAL WEIGHT PER PC. | | | |
| TYPE & TEMPER | | | |
| HEAT TREAT. SPEC. | | | |
| FINISH & SPEC. NO. | | | |

| | | | | |
|---------------|-------|-------------|-----------|----------|
| REQ. PER UNIT | MODEL | PROJECT NO. | ASSY. NO. | DATE |
| | RTP | | | 10-10-55 |
| USED ON | | | | |

CK-314

FOR 230 VOLT OPERATION
 REMOVE LEAD MARKED ***
 WIRE AS ABOVE

FOR 115V OPERATION
 T601 & T602

FOR 230V OPERATION
 REMOVE LEAD MARKED ***
 WIRE AS ABOVE