

IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE  
OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY  
THE PURCHASER PROMPTLY.

# STANDARD DRAWING

CL10006-D

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION.  
REMOVE ALL BURRS AND SHARP EDGES

USED ON

DEC 13/60


T.M.C. PT. NO.	MFR. PT. NO.	"L"	UH	W.M.	FEET. IN.	IN. MM.	MIN.	MAX.	MAX. MA
CL-10006-1	73 - 2 - 331	3. $3 \pm 10\%$	36	7.9	65	15	.15	1480	
CL-10006-2	73 - 2 - 272	27.0 $\pm 10\%$	60	2.5	20	2.8	300		
CL-10006-3	73 - 2 - 101	1.0 $\pm 10\%$	76	25	190	.3	1050		
CL-10006-4	73 - 2 - 471	4.7 $\pm 10\%$	45	7.9	55	.22	1225		
CL-10006-5	73 - 2 - 821	8.2 $\pm 10\%$	36	7.9	38	.45	850		
CL-10006-6	73 - 2 - 123	120 $\pm 5\%$	65	790	6.7	4.65	250		
CL-10006-7	73 - 2 - 683	680 $\pm 5\%$	60	790	3.0	13.0	155		

MODEL	PROJECT NO.	ASS'Y. NO.	DATE
-------	-------------	------------	------

DEC 13/60

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
			TM C (Canada) LIMITED OTTAWA	

## CHOKE - ENCAPSULATED

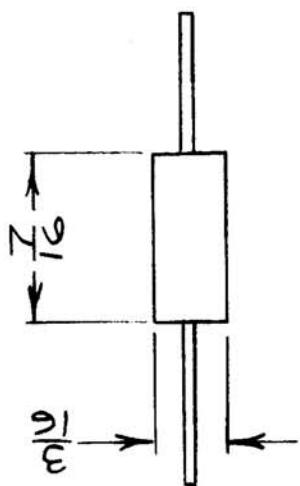

TOLERANCES	SCALE S10045 - 3			HEAT TREAT. SPEC.	DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
	ALL OTHERS	DEC. DIM. $\pm$ FRAC. DIM. $\pm$ ANGULAR DIM. $\pm$	DATE	CN. NO.	ENG. APP.
D	CN P/N - 6 $\pm$ 7.790 WAS 7.9	3 1/2 / 66	15782	HLA	Q16
C	REDRAWN	DEC 13/60	JPC		DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.