


ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.	REQ.	ITEM	PART NO.	DESCRIPTION					SYMBOL			
Ø		REL. TO PROD.	NOV 9/65		GM					L	Q	APPROX F ₀	MIN RP	MIN RP	MIN RP	MAX RES	MAX I		
									uh		MCS	uhf	K ₀ MC	K ₀ MC	K ₀ MC	Ω	m _a		
									8.2	65	7.9	57	0.9	26	8	50	57	.11	2400

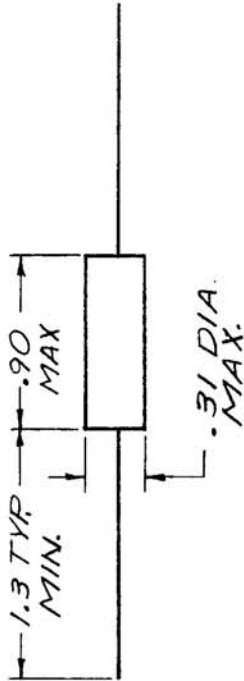

OPERATING TEMPERATURE RANGE: -55°C TO +125°C

MFG R: S10045-52

PART NO: RFC-L-8.2

AMC 20	020/66	A10376	9 NOV 65
MODEL	PROJECT NO.	ASS'Y. NO.	DATE
USED ON			
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES	IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		
TOLERANCES	SCALE	DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED	
ALL OTHERS	DIC. DIM. ±	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.	
	FFAC. DIM. ±		
	ANGULAR DIM. ±		
STOCK SIZE		WEIGHT PER PC.	
MATERIAL		TYPE & TEMPER	
HEAT TREAT. SPEC.		FINISH & SPEC. NO.	
DRAWN		ELEC. DES. APP.	
CHECKED		MECH. DES. APP.	
BEDFORD		FINAL APPROVAL	
CL 10028		Ø	

TMC (Canada) LIMITED
OTTAWA ONTARIO

CHOKE, R.F., ENCAPSULATED

RD

CL 10028